

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly Peer Reviewed Journal)

Vol. 5, Issue 1, January 2016

Cut Detection in Wireless Sensor Network

Kondhalkar Vrushali¹, Tambe Bhagyashri², Temkar Gaurav³, Thorawat Prafull⁴

Assistant Professor, Department of Computer Engineering, JSCOE, Hadapsar, Pune, India¹

UG Student, Department of Computer Engineering, JSCOE, Hadapsar, Pune, India^{2,3,4}

ABSTRACT: Wireless sensor network can get separated into multiple connected components due to the failure of some of its nodes, which is called a “cut.” In this paper, we consider the problem of detecting cuts by the remaining nodes of a wireless sensor network. We propose an algorithm that allows 1) every node to detect when the connectivity to a specially designated node has been lost, and 2) one or more nodes (that are connected to the special node after the cut) to detect the occurrence of the cut. The algorithm is distributed and asynchronous: every node needs to communicate with only those nodes that are within its communication range. The algorithm is based on the iterative computation of a fictitious “electrical potential” of the nodes. The convergence rate of the underlying iterative scheme is independent of the size and structure of the network.

KEYWORDS: Wireless networks, sensor networks, network separation, detection, iterative computation.

I.INTRODUCTION

Wireless sensor networks (WSNs) are a promising technology for monitoring large regions at high spatial and temporal resolution. However, the small size and low cost of the nodes that makes them attractive for wide spread deployment also causes the disadvantage of low-operational reliability. A node may fail due to various factors such as mechanical/electrical problems, environmental degradation, battery depletion, or hostile tampering. In fact, node failure is expected to be quite common due to the typically limited energy budget of the nodes that are powered by small batteries. Failure of a set of nodes will reduce the number of multihop paths in the network. Such failures can cause a subset of nodes—that have not failed—to become disconnected from the rest, resulting in a “cut.” Two nodes are said to be disconnected if there is no path between them[1].

In this paper, we propose a distributed algorithm to detect cuts, named the Distributed Cut Detection (DCD) algorithm. The algorithm allows each node to detect DOS events and a subset of nodes to detect CCOS events. The algorithm we propose is distributed and asynchronous: it involves only local communication between neighboring nodes, and is robust to temporary communication failure between node pairs. A key component of the DCD algorithm is a distributed iterative computational step through which the nodes compute their (fictitious) electrical potentials. The convergence rate of the computation is independent of the size and structure of the network[2]. The DOS detection part of the algorithm is applicable to arbitrary networks; a node only needs to communicate a scalar variable to its neighbors. The CCOS detection part of the algorithm is limited to networks that are deployed in 2D euclidean spaces, and nodes need to know their own positions. The position information need not be highly accurate. The proposed algorithm is an extension of partially examined the DOS detection problem [3].

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly Peer Reviewed Journal)

Vol. 5, Issue 1, January 2016

II. LITERATURE SURVEY

1. Fast Jamming Detection in Sensor Networks.

It Focus on methods to detect the place where jamming attacks.

Advantage: Observation of packet loss over an area gives us a faster detection of jamming attacks.

Disadvantage: Not for different attacker models.

2. An algorithm for Reconnecting Wireless Sensor Network partition.

It Based on method for repairing network partitions based on mobile nodes.

Advantage: System includes mobile nodes (robots), that are used for repairing the network partitions. Upon detecting the presence of a partition and roughly estimating its position, the base station sends a mobile node to that position.

Disadvantage: Future steps consist in deploying an early prototype on the multi-agent platform we have been developing.

3. Destination-based Cut Detection in Wireless Sensor Networks.

Advantage: The point-to-point cut detection (P2P-CD) protocol enables each node in the network to determine the connectivity to any destination. In P2P-CD the source node is able to determine if any destination node is reachable or not. .

Disadvantage: point-to-point cut detection protocol rely on nodes locations. Does not employ other types of routing protocols than location based..

5. Distributed cut detection in sensor networks.

Advantage: If a component that is disconnected due to a cut gets reconnected later the nodes can detect such reconnection from their states.

Disadvantage: Insecure cut detection when some of the nodes may fail in a malicious mode such as when nodes are hacked to send incorrect state data.

III. EXISTING SYSTEM

1) E-linear cut detection: Cut detection in wireless networks has been proposed, an algorithm that can be employed by a base station to detect an e-linear cut in a network. An e-linear cut is a separation of the network across a straight line so that at least end of the nodes (n is the total number of nodes in the network) are separated from the base station. The base station detects cuts when they occur based on whether it is able to receive messages from specially placed sentinel nodes [1].

2) Flooding based scheme: A flooding based scheme may also be used for detecting separations. Under node to- base flooding approach, every node periodically sends a time-stamped message to the base station. If the base station does not receive a new message from node i for a certain time interval, it can declare that i is disconnected from it [2]. Base station floods the network with time-stamped beacon packets periodically. A node detects that it is disconnected from the base if the length of time during which it hasn't received a new packet from the base exceeds a threshold value.

3) Critical node detection: A critical node is one whose removal renders the network disconnected.

4) Single path Routing approach: At the time of sending packets it choose only a single path.. Unsuitable for dynamic network reconfiguration: At the time of network reconfiguration it is not suitable for creating network of increasing or decreasing no. of sensor nodes [4].

IV. DRAWBACK OF EXISTING SYSTEM

1) Algorithm proposed only for detecting linear cuts in the network

2) In flooding based technique, routes from the nodes to the base station and back have to be recomputed when node failures occur.

3) Critical node detection uses relatively lower communication overhead come at the cost of high rate of incorrect detection.

International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly Peer Reviewed Journal)

Vol. 5, Issue 1, January 2016

V. PROPOSED SYSTEM

- 1) DCD algorithm is applicable even when the network gets separated into multiple components of arbitrary shapes, and not limited to straight line cuts.
- 2) DCD algorithm enables not just a base station to detect cuts, but also every node to detect if it is disconnected from the base station.
- 3) CCOS event detection part of the algorithm is designed for networks deployed in 2D regions, the DOS event detection part is applicable to networks deployed in arbitrary spaces.

VI. DISTRIBUTED CUT DETECTION

The algorithm we propose is asynchronous and distributed: it involves communication between neighboring nodes, and is robust to temporary communication failure between node pairs. A key component of the DCD algorithm is a distributed iterative computational step through which the nodes from sensor network compute their electrical potentials.[2]

1. CUT: Wireless sensor networks (WSNs) are a promising technology for monitoring large regions at high spatial and temporal resolution. In fact, node failure is expected to be quite common due to the typically limited energy budget of the nodes. Failure of a set of nodes will reduce the number of multi-hop paths in the network. Such failures can cause a subset of nodes – that have not failed – to become disconnected from the rest, resulting in a “cut”. Two nodes are said to be disconnected if there is no path between them.[1]

2. SOURCE NODE: We consider the problem of detecting cuts by the nodes of a wireless sensor network. We assume that there is a specially designated node in the network, which we call the *source node*. The source node may be a base station that serves as an interface between the network and its users. Since a cut may or may not separate a node from the source node, we distinguish between two distinct outcomes of a cut for a particular node.[1]

3. CCOS AND DOS: When a node u is disconnected from the source, we say that a DOS (Disconnected frOm Source) event has occurred for u . When a cut occurs in the network that does not separate a node u from the source node, we say that CCOS (Connected, but a Cut Occurred Somewhere) event has occurred for u . By cut detection we mean (i) detection by each node of a DOS event when it occurs, and (ii) detection of CCOS events by the nodes close to a cut, and the approximate location of the cut.[1]

VII. DCD ALGORITHM


Comes with provable characterization on the DOS detection accuracy CCOS events detection can be identified DCD algorithm enables base station and also every node to detect if it is disconnected from the base station.

1. DOS Detection: As the name of algorithm says its Disconnected from source. To send packets we use Shortest path algorithm, it is based on energy that means at the time of sending packets from source sensors node to destination sensor node, due to throughput or any energy related issue packets are not reaching to destination. And that disturbance is from near to source sensor node [3]. To resolve this problem we use the alternative shortest path. After repairing the cut, packets are transferred from earlier path. Diagram 1(a) shows cut occurred near to the source sensor node. Due to this it find some another alternative path to transferred a packets to destination sensor node. Diagram 1(b) shows alternative shortest path [2].


International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly Peer Reviewed Journal)

Vol. 5, Issue 1, January 2016

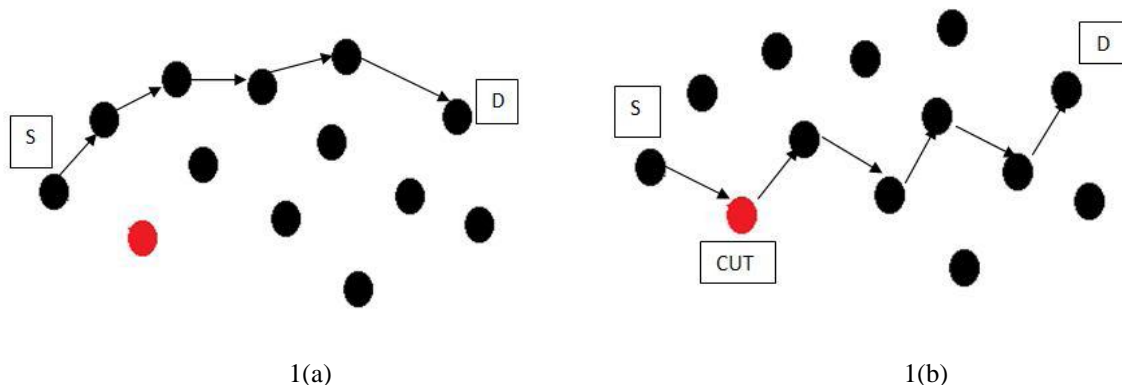

2. CCOS Detection: As the name of algorithm says its Connected but Cut Occurred From Source. At the time of sending packets cut is occurred somewhere middle in the path. To resolve this problem it uses alternative shortest path. Cut occurred in respective node, i.e. node not having sufficient energy to pass the packets forward. diagram 2(a) shows cut occurred in between the path[1]. To resolve this , it does the same thing as done in DOS

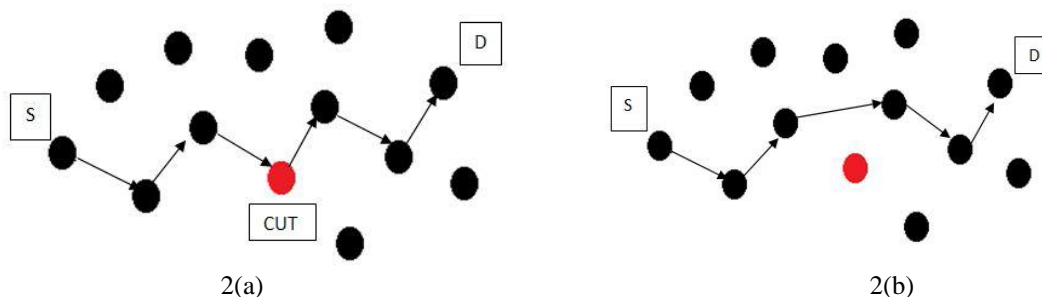

VIII. CONCLUSION

We conclude that, The DCD algorithm we propose here enables every node of a wireless sensor network to detect disconnected from source event if they occur. Second, it enables the subset of nodes that experiences CCOS event to detect them and estimate the approximate location of the cut in the form of a list of active nodes that lie at the boundary of the cut/hole. A key strength of the DCD algorithm is that the convergence rate of the underlying iterative scheme is quite fast and independent of the size and structure of the network, which makes detection using this algorithm quite fast[5].

REFERENCES

- [1] G. Dini, M. Pelagatti, and I.M. Savino, "An Algorithm for Reconnecting Wireless Sensor Network Partitions," Proc. European Conf. Wireless Sensor Networks, pp. 253-267, 2008.
- [2] N. Shrivastava, S. Suri, and C.D. To' th, "Detecting Cuts in Sensor Networks," ACM Trans. Sensor Networks, vol. 4, no. 2, pp. 1-25, 2008.
- [3] H. Ritter, R. Winter, and J. Schiller, "A Partition Detection System for Mobile Ad-hoc Networks," Proc. First Ann. IEEE Comm. Soc. Conf. Sensor and Ad Hoc Comm. And Networks (IEEE SECON '04), pp. 489-497, Oct. 2004.
- [4] M. Hauspie, J. Carle, and D. Simplot, "Partition Detection in Mobile Ad-Hoc Networks," Proc. Second Mediterranean Workshop Ad-Hoc Networks, pp. 25-27, 2003.
- [5] P. Barooah, "Distributed Cut Detection in Sensor Networks," Proc. 47th IEEE Conf. Decision and Control, pp. 1097-1102, Dec.2008.
- [6] A.D. Wood, J.A. Stankovic, and S.H. Son, "Jam: A Jammed-Area Mapping Service for Sensor Networks," Proc. IEEE Real Time Systems Symp., 2003.