

Load Frequency Controlled Based Power Energy Conversion System

Dr. C.B.Venkatramanan¹, Kiruthika.N²

Department of EEE, Sona College of Technology (Autonomous), Salem, Tamilnadu, India^{1,2}

ABSTRACT: Energy conversion systems current as the disturbing variable. The algorithm detects adaptive Maximum Power Point Tracking Control Algorithm sudden wind speed changes indirectly through the dc-link voltage slope. The voltage slope is additionally used to enhance the tracking speed of the algorithm and to avert the generator from stalling under rapid wind speed slowdown conditions. The proposed method uses two modes of operation: A perturb and observe (P&O) mode with adaptive step size under slow wind speed fluctuation conditions, and a prediction mode employed under expeditious wind speed change conditions. The dclink capacitor voltage slope reflects the expedition information of the generator, which is then used to prognosticate the next step size and direction of the current command. The algorithm shows enhanced stability and expeditious tracking capability under both high and low rate of change wind speed conditions.

KEYWORDS: Maximum power point tracking (MPPT), Perturb& observe algorithm (P&O), wind energy conversion system (WECS), Unity power factor, power signal feedback (PSF).

I. INTRODUCTION

The growing need for electrical energy and the will to preserve the nature justifies the use of renewable energy sources. The use of renewable sources for electric power generation has been a huge increase since the past decade [1]. Increased economic and ecological woes have driven researchers to discover newer and better means of generating electrical energy. In this race, the production of electricity by wind turbine is actually the best method in comparison with the energy produced by the solar source conversion and this is due to the price per a kilo watt that is less elevated with respect to the second [2]. Among the most used and available technologies for wind turbines, the doubly fed induction generator (DFIG) is the most accepted because it presents greater benefits for a reduced conversion structure operation, and the control four quadrants of active and reactive power. Due to variable speed operation, the total energy production is 30% to 40% higher and therefore capacity utilization factor is improved and the cost per kWh of energy is reduced, wind energy is gaining more support due to its less space occupancy and zero-carbon emission during operation. Variable speed wind energy conversion systems (WECSs) can harness more electrical energy than fixed speed WECSs by controlling their speed according to the variations in wind velocity [3], [4]. Maximum power point tracking (MPPT) algorithms are used to extract maximum power from the available wind energy and they are classified into three categories, namely tip speed ratio (TSR) control, power signal feedback (PSF) control and hill climb search (HCS) control . Across the globe, research community is exploring all possibilities for the efficient energy conversion from freely available abundant renewable energy sources. Among the popular renewable energy sources [5].

II.RELATED WORK

A.WIND ENERGY CONVERSION SYSTEM MODELING

The wind turbine modeling is inspired. In the following, the wind turbine components models are briefly described. In recent years, wind energy has become one of the most important and promising sources of renewable energy, which demands additional transmission capacity and better means of maintaining system reliability. Wind energy is a nonpolluting, safe renewable source. The evolution of technology related to wind systems industry led to the development of a generation of variable speed wind turbines that present many advantages compared to the fixed speed wind turbines. The power retrieved from wind energy systems depends on the power set point traced by maximum power point tracking.

$$s = (\omega_s - \omega_r) / \omega_s(1)$$

The proposed method is compared with conventional perturb and observer (P&O) MPPT controller. The obtained results clearly demonstrates that the proposed control is more efficient than other conventional methods. This paper presents an adaptive maximum power point tracking (MPPT) algorithm for small-scale wind energy conversion systems (WECSs) to harvest more energy from turbulent wind.

• **Tracking Capability**

Evaluation of the proposed algorithm is done on a laboratory-scaled dc motor drive-based WECS emulator, 32-bit floating point digital signal controller, is used to execute the control schemes of the in-lab experimental setup. Experimental results show that tracking capability of the proposed algorithm under sudden and gradual fluctuating wind conditions is efficient and effective.

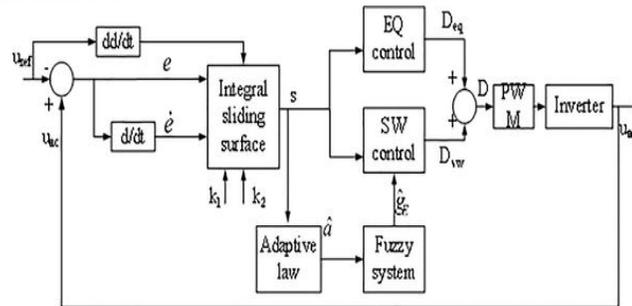


Figure: 3 Gradual Fluctuating

The proposed algorithm combines the computational behavior of hill climb search, tip speed ratio, and power signal feedback control algorithms for its adaptability over wide range of WECSs and fast tracking of maximum power point.

$$J_{dot} / dt = T_m - T_{em} \quad (3)$$

$$P_g = \frac{3}{\pi} \omega_b I_{DC} \sqrt{k^2 - \frac{6}{\pi^2} (PL s)^2 I^2} \quad (4)$$

$$P = 1/2 \rho_{air} A v^3 C_p(\lambda, \beta) \quad (5)$$

$C_p(\lambda, \beta)$ - coefficient of the wind turbine with the tip speed ratio of λ and blade pitch angle of β .

In this paper, the proposed MPPT algorithm is implemented by using buck-boost featured single-ended primary inductor converter to extract maximum power from full range of wind velocity profile.

IV RESULT DISCUSSION AND ANALYSIS

In small-scale WECSs, power conditioning converter’s control is most frequently adapting strategy to extract maximum power since pitch angle control is impractical due to their mechanical structure. In this work buck–boost featured single-ended primary inductor converter (SEPIC) converter has been used to extract maximum power from total range of wind velocity profile.



TABLE II. RESULTS COMPARISON TABLE OF HYDRO THERMAL AREA

Control ler	Parameters to be Compared		
	Peak value of frequency deviation	Number of Oscillations	Time taken to reach steady state position
With PI controller	0.61Hz	More	41 Sec
With PID controller	0.46Hz	Less	28 Sec
With fuzzy controller	0.0.11Hz	Less	22 Sec

TABLE III. RESULTS COMPARISON TABLE OF HYDROTHERMAL AREA WITH WIND

Controller	Parameters to be Compared		
	Peak value of frequency deviation	Number of oscillations	Time taken to reach steady state position
With PI controller	0.45Hz	More	34 Sec
With PID controller	0.19Hz	Moderate	31 Sec
With fuzzy controller	0.026Hz	Less	23 Sec

Small-scale WECSs are main resources for DERs in micro grid systems and are usually installed at congested places with turbulent wind conditions where wind speed and direction vary frequently. Extraction of maximum power with fast tracking control strategy under fluctuating wind conditions is a challenging issue.

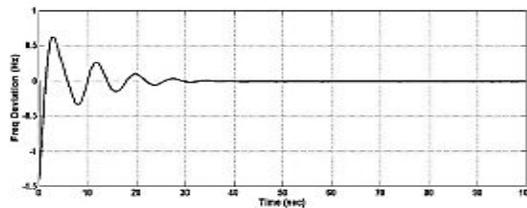


Fig. 10. Simulation result with PI controller

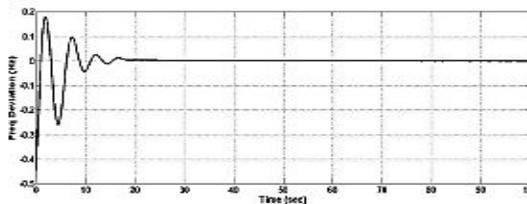


Fig. 11. Simulation result with PID controller

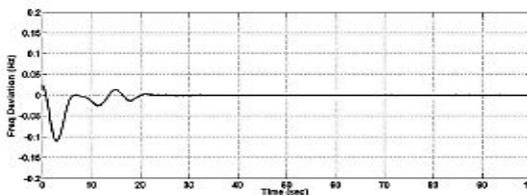


Fig. 12. Simulation result with Fuzzy controller

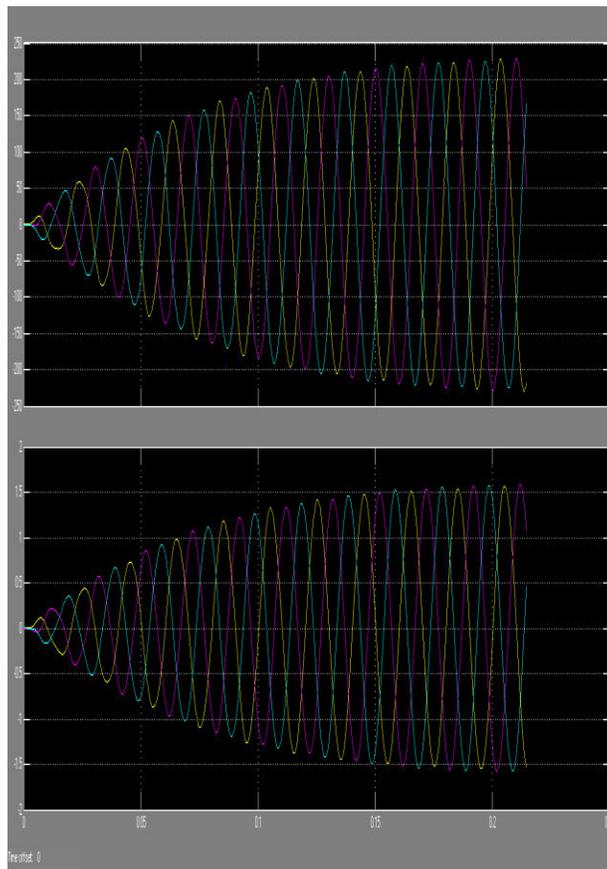


Figure: 6 dynamic generation speed

The generated active power starts increasing smoothly (together with the turbine speed) to reach its rated value. Over that time frame the turbine speed also increases. Initially, the pitch angle of the turbine blades is zero degree. Then the pitch angle is increased from 0 degree in order to limit the mechanical power. We also observed the voltage and the generated reactive power.

V.CONCLUSION

In the rest of this paper, we considered that the wind was in its optimum range of operation and it worked steady regardless of the wind speed applied to the blades. We have focused our study on the control in this area of operation allowing the wind to extract the maximum power available. We used an indirect method of MPPT control without adjustment of the rotational speed. The various controls were detailed to provide independent control of active and reactive power while ensuring optimal operation of the turbine. To validate the modeling and control of the global wind system, we have performed a simulation for an operating point at constant wind speed. The results showed that the active and reactive power of the wind system could be controlled independently while ensuring optimal active power supplied to the grid. The proposed algorithm provides the following advantages: 1) improved dynamic response of the system; 2) prerequisite of system's optimal characteristics data is not required and hence the algorithm is adaptive; and 3) algorithm's continuous modifications on programmable memory towards optimal characteristics of the system, eliminate the possibility of system's performance degradation due to parameters variations. To extract maximum power from the wide range of wind conditions, DFIG converter is used for the implementation of proposed adaptive Maximum Power Point algorithm.

REFERENCES

- [1] Ashwani Kumar And Sanjay K. Jain, A Review On The Operation Of Grid Integrated Doubly Fed Induction Generator, International Journal Of Enhanced Research In Science Technology And Engineering, Vol. 2, No. 6, (June 2013).
- [2] J.S.Lather, S.S Dhillon, S.Marwaha, Modern Control Aspects In Doubly Fed Induction Generator Based Power Systems: A Review, International Journal Of Advanced Research In Electrical, Electronics And Instrumentation Engineering, Vol. 2, No. 6, (June 2013).
- [3] EvgenijeAdzic, ZoranIvanovic, Milan Adzic and Vladimir Katic, Maximum Power Search in Wind Turbine Based on Fuzzy Logic Controll, ActaPolytechnicaHungarica ,Vol. 6, No. 1, (August 2011).
- [4] Ahmad Nadhir, AgusNaba, and Takashi Hiyama, Intelligent Gradient Detection on MPPT Control for Variable Speed Wind Energy Conversion System, ACEEE Int. J. on Electrical and Power Engineering, Vol. 02, No. 02, (August 2011).
- [5] Aryuantosoetdjo, Abraham Lomi And Widodopujimulayanto, Modelling Of Wind Energy System With Mppt Controll, International Conference On Electrical Engineering And Informatics, (July 2011).
- [6] Jogendra Singh Thongam and MohandOuhrouche, MPPT control methods in wind energy conversion systems, Intech 978-953-307-508-2, (June 2011).
- [7] Joanne Hui, AlirezaBakhshai, and Praveen K. Jain, Fellow, A Master-Slave Fuzzy Logic Control Scheme for Maximum Power Point Tracking in Wind Energy Systems, IEEE CONF, 978-1-4244-3384-1/10, (2010).