



e-ISSN: 2319-8753 | p-ISSN: 2320-6710

IJIRSET

International Journal of Innovative Research in
SCIENCE | ENGINEERING | TECHNOLOGY

INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

Volume 10, Issue 3, March 2021

ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA

Impact Factor: 7.512

9940 572 462

6381 907 438

ijirset@gmail.com

www.ijirset.com



Risk Assessment in Cement Manufacturing Process

Denny Jollif S¹, J Jeremy Jeba Samuel²

Final year Student, Department of Mechanical Engineering, Francis Xavier Engineering College, Tirunelveli, India

Assistant Professor, Department of Mechanical Engineering, Francis Xavier Engineering College, Tirunelveli, India

ABSTRACT: Cement is the basic material used for construction activities. The Cement manufacturing process mainly can be divided into ten stages. From limestone loading to dispatching of cement various hazards take place which causes harm. The purpose of this project is to minimize the risk by using Risk assessment techniques and methods and provide safety control measures, health and safety environment built up and healthy environment create beneficial for human activities. Hazard was properly identified, analysis and assess qualitative and quantitative methods of risk evaluation and risk estimation can be done. Proper recording, documentation process and review from time to time to proper control the cement manufacturing activities.

KEYWORDS: Identification of hazards, estimation of hazards, evaluate the hazards, Records and findings, safety control measures, Risk assessment techniques.

I. INTRODUCTION

Risk assessment is a technique to properly assess the risks. It is simply a careful examination of the work place to prevent any harm. You have enough precautions to prevent any harm coming to the workers. The aim of risk assessment is if no one can be injured at the workplace. Accident and ill health at work place of the workers, which affects our business and output is lost. In some countries you are legally required to assess the risks in workplace

II. LITERATURE REVIEW

Alvear- Galindo, et al, suggest that when working in cement industry, industrial workers are prone from hazards. Various stages of manufacturing process every stages hazard related personal protective equipment's, unsafe condition for doing work. Workers are exposed to hazards in their workplaces affects the health [1]

R. Hamdy, suggest that Hazard faced in each and every stage mining, crushing, stacking and reclaiming, grinding, calcination stage, cooling, material, storage and transportation system. In that production process high risk and hazard created affects industrial workers. Hazard faced in our working environment is noise dust, vibration and emergency response to highlight the impact of changing environment pattern on the level and growth of productivity and efficiency in the industry [2]

Ishak, S. and Hashim, explained that Moreover health safety policy statement should contain its aim. These following points considered safety policy.

1. Safety precautions can be taken from time to time.
2. Personal protective equipment is necessary each and every stage at production process.
3. Standard operating procedure is maintained.
4. Health and safety program conducted.
5. Supervision, training program conducted, risk assessment, information gathers these are the basic requirements of health and safety.
6. To use a safety committee.
7. Safety welfare program be conducted, the aims should cover health and safety and environmental issues.[3]

Jousi A., Risk engineering is an important role in cement manufacturing process to eliminate the hazards, examine the performance, to analysis the losses, identify the hazards, providing recommendation, proper record



keeping maintained (previous records), Risk engineering. Control all the tasks such as guarding information, behavior of works to mining the risk and provide safety measures.[4]

Bartolozzi, et al, explains that Continuous improvement day by day to increase the efficiency, in cement manufacturing process to eliminate all wastages. In cement manufacturing process raising etc. quality of product, the cost should be minimized, improving delivery of product, reducing wastages.

Implementation of cement industry day by day to increase the productivity beneficial for our future. New technique be developed to proper control cement manufacturing process. To proper continuous improvement of production process. Input, output and process control management.[5]

Lesliam suggest that to control risk in cement manufacturing plant our working operation should be safe and reliable without any disturbance. Risk evaluation is access any from time to time to provide safety and beneficial for future development our work should be safe and reliable and easily handling of manufacturing process by using simple techniques and easy procedure maintained to provide proper satisfaction.[6]

Occupation health and safety point of view, in the cement plant health and safety environment created to provide proper satisfaction among the workers. Winston, H.H and D. Joan suggest that In cement industry pollution prevention is necessary to provide safe and healthy environment built up. To control cement manufacturing process pollution free system should be developed and various safety precautions and guidelines conducted.[7]

III. PROCESS INVOLVED

Cement manufacturing Process divided in mainly in 10 stages:

1. Mining.
2. Crushing.
3. Stacking and reclaiming.
4. Grinding in V.R.M.
5. Preheating in pre-heater.
6. Burning in kiln.
7. Cooling in cooler.
8. Grinding clinker with gypsum and fly ash.
9. Packing in packers.
10. Dispatch products.

Methods:

1. Risk identification.
2. Consequence analysis.
3. Quantitative, quantitative probability estimation.
4. Assessing the effectiveness.
5. Estimation the level of risk.
6. Risk evaluation.

Using following techniques for my current project work: Major prone areas such as kiln heating, conveyor belt – raw material movement, dust and suspended particle, material sampling. This technique can be used in my project work.

1. Brainstorming- Generate new ideas and solutions (supervisors, workers etc)
2. Checklists – Documentation of the task
3. Hazard and operability study – proper evaluation, control measures
4. Failure mode and effect analysis- qualitative and quantitative methods used.
5. Fault tree analysis- Identify potential causes of system failures.
6. Preliminary Hazard Analysis- Identifying apparent hazards, assess the severity.
7. Swift if technique- corrective action created and standard operating procedure.
8. Toxicity assessment- Is the process of evaluating whether the possibility exists.




Types Of Risk

Likelihood	Low	Risk Low
Consequence	Low	
Likelihood	High	Risk Medium
Consequence	Low	
Likelihood	Low	Risk Medium
Consequence	High	
Likelihood	High	Risk High
Consequence	High	

There are five steps to conduct risk assessment which are as follows:

1. List the work task
 - (a) Location (location change – risk is change)
 - (b) People (Worker unexperienced, not competent)
 - (c) Work activity (Different work has different risk)
 - (d) Equipment (ladder, scaffold, machinery etc.)
2. Identify the risk
 - (a) What are the hazards? (fall of man).
 - (b) Who might be harmed? (Workers, visitors, engineer, manufacturer, supervisor).
 - (c) How might they be harmed? (due to lack of safety harness- worker may fall).
3. Estimate the risk

The below figure shows the estimation of risk.

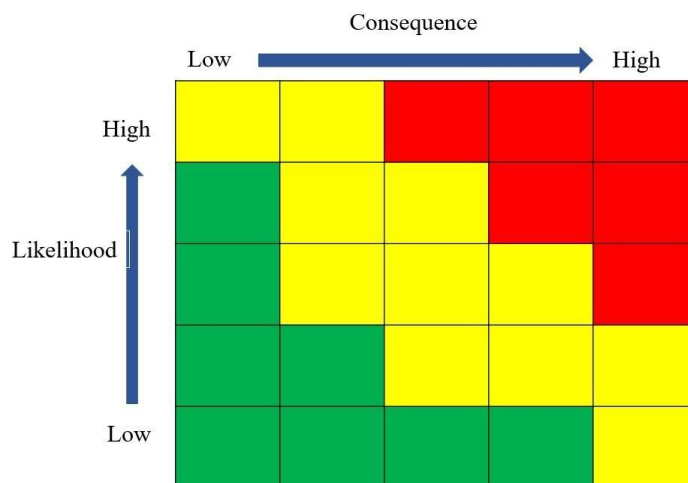

Risk = Likelihood x Consequence



You need to consider two things:

- a. How likely is it that something could go wrong? (likelihood- possibility of risk)
- b. How serious would the outcome be? Risk = likelihood × consequence


4. Evaluate the risk Likelihood consequence

Likelihood

- 5 - Very likely
- 4 - Likely.
- 3 - Fairly likely.
- 2- Unlikely.
- 1 - Very unlikely.

Consequences

- 5 - catastrophic (death)
- 4 - major (big outcome)
- 3 - moderate
- 2 - minor
- 1 – insignificant

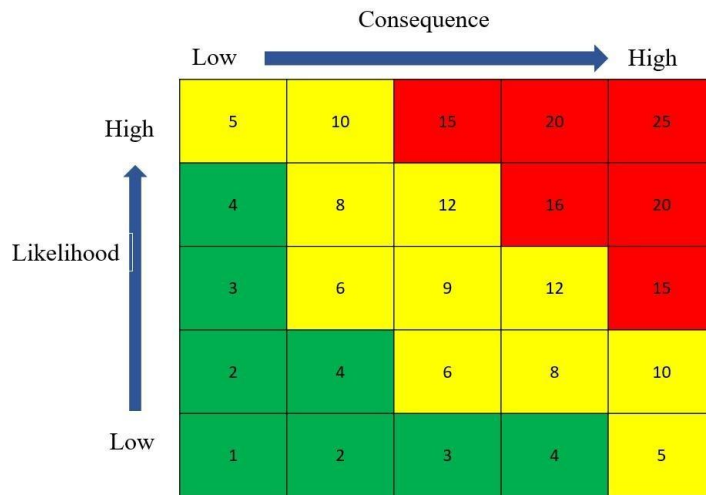

- 1-4 Low risk (acceptable)
- 5-14 Medium risk (tolerable for little work)
- 15-25 High risk (Take immediate action)

5. Record your findings

- a. The location, activity and equipment
- b. Being assessed
- c. Hazard and risk levels (evaluation)
- d. Risk controls



- e. Assessor's details
- f. Date and time
- g. Review date (1 year, worker change, location change, equipment change review is necessary not wait for the year)

Calculation:

$$\text{Risk} = L \times C$$

$$\text{Risk Rating} = N \times L \times C$$

where,

N = Number of workers,

L = Likelihood,

C = Consequence

IV. VARIOUS HAZARDS

Hazard faced in cement manufacturing process. Various hazards take place are as follows:

1. Exposure to dust – Transferring of material as well as storage of material excessive dust create major problems.
2. Unclean platform – To do work in presence of unclean surfaces high risk should be created.
3. Poor supervision – Travelling over and under the transportation system.
4. Electrical hazards – Electrical parts such as cables, sometime shocks and vibration possibility.
5. Exposure to noise – In crushing operation excessive noise created.
6. Falling of material – Falling of material at certain height.
7. Hurling of mill parts – From the mill platform high risk built up.
8. Kiln thermal load hazards – Thermal disturbance which affects the surface property.
9. Use of manual work equipment – Handling of material not be proper by poor operating condition of equipment's.
10. Work in confined space – Interior work on the basis of clinker production system.
11. Untrained drivers – Drivers are not properly trained they are carelessly in driving position.
12. Inadequate brakes – lack of maintenance possibility.
13. Hit by fly rocks – Bodily injuring during blast operations.
14. Storage of explosive – Exposure to over pressure.
15. Noise and vibration – During drilling operations noisy and vibrating surfaces affects the production processes.
16. Boulder accidents – During blasting operation, Fly rocks and boulder accidents.
17. Accidental fire – Some time fire accident in the transportation of materials.
18. Conveyor hazards – conveyor moving parts contact with people.
19. Mechanical hazards – Mechanical equipment failure.



20. Use of lifting – Lifting equipment's have high risk from loading of materials.

V. RESULT

1. To determine the acceptable level of risk by using risk assessment techniques and methods and provide safety control measures. High risks range (15- 25) , to reduce this risk to take immediate action is required using safety control measures. Risks should be minimized as an acceptable level to manage it (1-4).
2. To minimize the risks, risk control can involve monitoring, re- evaluation, and compliance with decisions.
3. Proper action is necessary to implementing risk evaluation decisions at time to time.
4. It is good practice to review assessment for particular time to time (1 years) to be done. The level of documentation on the basis of legislated requirements.
5. To minimize major prone areas risk by using five basic steps to conduct risk assessment and provide safety measures.

Air borne dust :

$$R = L \times C = 3 \times 3 = 9 \text{ (Medium Risk).}$$

To minimize this risk control measures, apply such as PPE, Dust suction system etc. So $R = 1 \times 1 = 1$, this type of protective measures activities the overall risk is to be reduced. Similarly other prone hazards area of high risks is minimized by using risks assessment techniques and methods to provide control measures.

VI. CONCLUSION

In this project we study about cement manufacturing process & identification of hazards at each and every stages of cement manufacturing process. major prone areas working that part using risk assessment techniques and methods to minimize the risks and control measures.

VII. FUTURE SCOPE

Furthermore, the research push the management to adopt best practices to remove the waste of the overall process. The application will be extended to different cement companies taking in consideration the impact of maintenance practices on productivity .In addition, it will consider establishing a reference guideline of a standard procedure based on the process of maintenance protocol development for cement companies.

REFERENCES

- [1] COX, S.J and cheyne. "Assessing safety culture in OFF- Shore environment." Safety Science, 34(1-3),111-129, 2000.
- [2] PR Bose, Pradosh Nath."Leveraging Liberalization the case of Indian cement industry" Economic and Political Weekly, 37(30), 27 July 2002.
- [3] Carder, B. and Rogan, P.w. "A Survey based system for safety measurements and improvement." Journal of study Research, 34, 157-165,2003.
- [4] Evelyn , Florence Y. and Adrian . "Framework for project manager to manage Construction safety" International Journal of Project Manager, 23(4),329-341, 2008.
- [5] Chun-Jen Chung and Hui-Mi wee. "Green-component Life-cycle value on design and reverse manufacturing in semi-closed supply chain." Informational Journal production Economics, 113(2),528- 545,2008.
- [6] Nunes, B. and Bennett, DJ. "Green operations Initiative in the Automotive Industry : An environmental reports analysis and benchmarking study" Bench marketing Informational journal, 17(3),2010.
- [7] Flanagan,R and Norman,G. "Risk management of construction" ASC proceeding of the 37 annual conference university of Denver-Denver, Colorad, 4(7), 95-100, 2001.
- [8] Udai.singh chouhan. Etal. "Through lean manufacturing techniques improvement introduction of cement plant" International Journal OF Engineering Research and Application , 6(7), 52-58, July 2016.



- [9] Sharma, P. V, Y.V Apparao. “Indian cement industry a regional analysis” Indian Journal of Regional Science , 22(2), 1990.
- [10] Aven T. “The risk concept-historical and recent development trends” Reliability engineering and system safety , (99), 33-44, 2012.
- [11] Prevention, Pollution, and Abatement Handbook. “World bank group.” Washington, DC, 1998.
- [12] AKOSMAN, Cevdet and Vedat KARAHAN. “Occupational Health Risk Analysis and Assessment in Cement Production Processes”. Firat University Turkish Journal of Science and Technology, 13(2), 2018.
- [13] Gheibi, Mohammad, et al. “Life cycle assessment of concrete production with a focus on air pollutants and the desired risk parameters using genetic algorithm” .Journal of Environmental Health Science and Engineering, 16(1), 2018.
- [14] Aissani, Nassima, Islam Hadj Mohamed Guitarni, and Zoubida Lounis. “Decision process for safety based on Bayesian approach.” 3rd International Conference on Pattern Analysis and Intelligent Systems (PAIS). IEEE, 16(1), 2018.
- [15] Putri, Katania Rosela, et al. “An Environmental Health Risk Assessment of Workers Ambient Exposure to Particulate Matter of 2.5 Microns or Less at a Concrete Batching Plant.” Indian Journal of Public Health Research and Development, 10(2), 2019.



INNO  **SPACE**
SJIF Scientific Journal Impact Factor

**Impact Factor:
7.512**

ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA



INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

 **9940 572 462**  **6381 907 438**  **ijirset@gmail.com**



www.ijirset.com

Scan to save the contact details