



e-ISSN: 2319-8753 | p-ISSN: 2347-6710

IJRSET

International Journal of Innovative Research in
SCIENCE | ENGINEERING | TECHNOLOGY

INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

Volume 11, Issue 12, December 2022

ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA

Impact Factor: 8.118

 9940 572 462

 6381 907 438

 ijirset@gmail.com

 www.ijirset.com

A Review on Performance Enhancement of Household Refrigerator using Phase Change Materials (PCMs)

Dr. Vilas A. Pharande¹, Shrinath Arun Desai²

Principal, Arvind Gavali College of Engineering, Maharashtra, India¹

P.G. Student, Department of Mechanical Engineering, Arvind Gavali College of Engineering, Maharashtra, India²

ABSTRACT: As per world's energy scenario energy demands vary on daily, weekly and seasonal bases. The utilization of renewable energy is obvious the attraction point of many researchers now a day due to its availability. Thermal energy storage by using phase change material is one of most demanding and innovative technology for storage of energy. Refrigeration and Air Conditioning are somewhat responsible for present energy crisis. This review article focuses on methods of thermal energy storage system, integration of organic, inorganic and eutectic type of PCM in house hold refrigerator and brief summary of performance of household refrigerator with and without PCM.

KEYWORDS: Thermal Energy Storage, Phase Change Material, Household Refrigerator, COP.

I. INTRODUCTION

India is the world's third largest producer and third largest consumer of electricity. [1-2] The national electric grid in India has an installed capacity of 368.79 GW as of 31 December 2019.[3] out of which 24.3 %of energy is consumed by residential utilities. The utilization of refrigeration and air conditioning system increasing day by day which are responsible for present energy crises problem throughout the world. To deal with such type of challenges may researchers and scientists in the field of refrigeration and air conditioning trying to develop different technical options for improving the energy efficiency of household refrigerator. In order to improve the performance of household refrigerator application of thermal energy storage system is mostly reliable, green and economic. It is proven that Integration of latent heat storage (LHS)system to the household refrigerator helps to increase the coefficient of performance and running time of compressor is significantly reduced. Generally, energy consumption of a refrigerator depends upon its components efficiency, ambient temperature, thermal load, door openings, set-point temperature in its compartment(s), and refrigerant type.[31] CM phase change temperature and thickness, and ambient temperature on a PCM slab at the evaporator were investigated by Azzouz et.al.[18] Modeling was developed for both compressor ON/OFF modes reflecting PCM charging/discharging.

Present work mainly focused on compressive literature study on integration of phase change material type of organic, inorganic and eutectic mixture in household refrigerator and summarized its performance with and without Phase Change Material (PCM).

II. METHODS OF THERMAL ENERGY STORAGE SYSTEM

Now-a-days energy storage has become an important part of renewable energy technology systems. Thermal energy storage (TES) is a technology that store thermal energy by heating or cooling a storage medium so that the stored energy can be used at a later time for heating and cooling applications and power generation. [1] Thermal energy storage(TES) is a technology with a high potential for different thermal applications. Thermal energy storage can be accomplished either by using sensible heat storage or latent heat storage.[2]

1. Sensible Heat Storage System

In Sensible heat storage (SHS), thermal energy is stored by raising the temperature of a solid or liquid. SHS system utilizes the heat capacity and the change in temperature of the material during the process of charging and discharging. The amount of heat stored depends on the specific heat of the medium, the temperature change and the amount of storage material.[2] Ioan Sarbu and et.al concluded SHS is applicable to domestic systems, district

heating, and industrial need and water is best industrial and residential application. Underground storage of sensible heat in both liquid and solid media is also used for typically large-scale applications. However, TES systems based on SHS offer a storage capacity that is limited by the specific heat of the storage medium. Furthermore, SHS systems require proper design to discharge thermal energy at constant temperatures. PCMs can offer a higher storage capacity that is associated with the latent heat of the phase change.[3]

2. Latent Heat Storage System

When the application of heat, changes the phase of the substance, is called Latent heat. Latent heat is stored in the substance at constant temperature during phase change. LHS materials are known as PCMs due to their property of releasing or absorbing energy with a change in physical state. The energy storage density increases and hence the volume is reduced, in the case of LHS. The use of an LHS system using PCMs is an efficient way of storing thermal energy and has the advantages of high-energy storage capacity and the isothermal nature of the storage process. In case of latent heat storage system capacity of storing heat at almost similar temperature range.[4]

3. PHASE CHANGE THEORY

The exact definition of the phase of a pure body is “an area in the space of the thermodynamic parameters (T,p,V) of a system composed uniquely of the pure body, in which the free energy is an analytical function”. [4] The working mechanism of phase change material is elaborated as follows, where water is used as PCM.

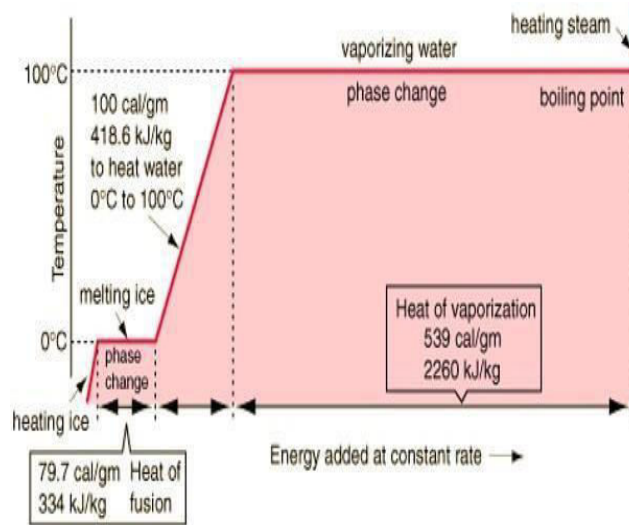


Fig -1: Phase Change Mechanism Of Water.[35]

If we supply heat to the ice which is below 0°C at 1 atmospheric temperature increases its temperature upto 0°C. further addition of heat convert the ice into water at 0°C. Here the phase changes from ice to liquid but temperature remains constant. Once all the volume of ice is converted in water further addition of heat increases the temperature of water up to 100°C. At 100°C water is converted into steam on addition of heat.

While changing the phase of substance latent heat is stored as thermal energy storage.

4. WORKING OF HOUSEHOLD REFRIGERATOR

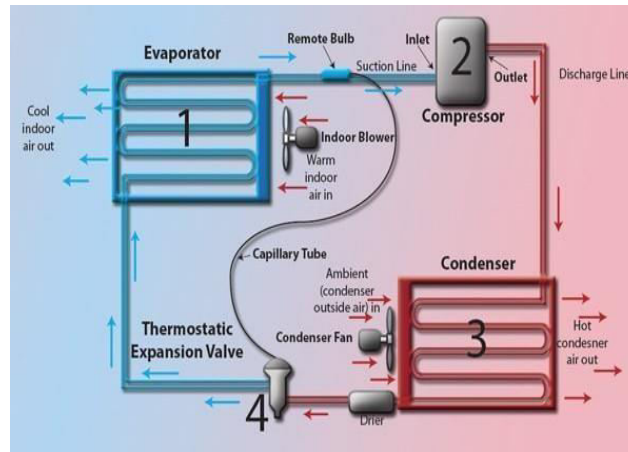


Fig -2: Working Principle of Household Refrigerator.[27]

The compressor compresses the refrigerant gas. This raises the refrigerant’s pressure and temperature, so the heat exchanging coils outside the refrigerator allow the refrigerant to dissipate the heat. As it cools, the refrigerant condensed into liquid form and flows through the expansion valve. When it flows through the expansion valve, the liquid refrigerant is allowed to move from high pressure zone to low pressure zone so it expand and evaporates. The coils inside the refrigerator allows the refrigerant to absorb heat, making the inside of the refrigerator cold. The cycle then repeats. [24-25]

5. PERFORMANCE OF REFRIGERATOR WITH AND WITHOUT PCM

Azzuage and et al. proposed the dynamic model of an improved refrigerator introducing phase change material as cold storage. This paper presents a first step in the design of an improved refrigerator using phase change material as a cold storage by replacing free convective heat transfer to air and conducted results for heat transfer from the evaporator with and without PCM which showed 72% increase in COP and 25% reduction in working time of compressor.[28]

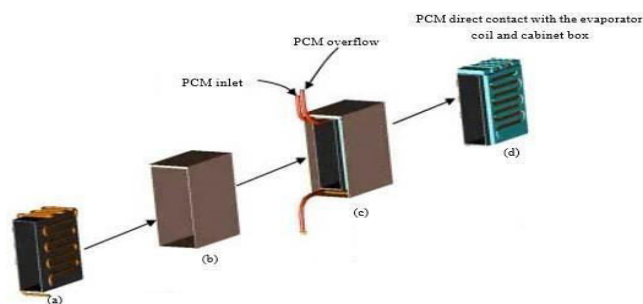


Fig -3: Arrangement of PCM based Evaporator.[28]

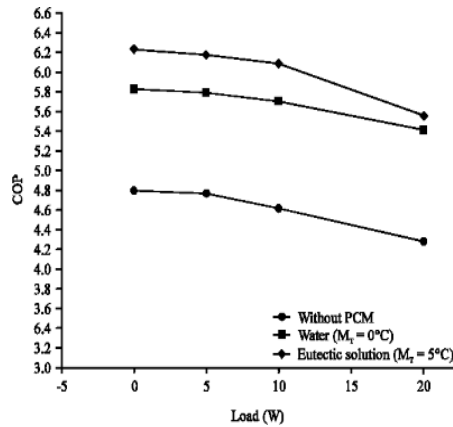


Fig -4: Effect of PCM on COP at Thermal Load(Q=0.00425m³).[28]

Imran Khan et.al improve the performance of household refrigerator by application of PCM as water and eutectic solution and compared its performance without PCM and significantly reduced compressor running time about 2-36% as compared to without PCM.[29]

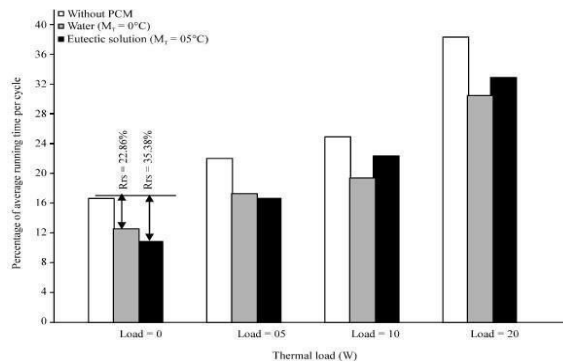


Fig -5: Effect of Compressor running time on Thermal load.[29]

Rezaur Rahman, Md. Examines the improvement of the COP of conventional refrigerator by using water as PCM upto 50- 60% also achieved better food quality due to lower hysteresis cycles of ON/OFF for given period of operation.[30]

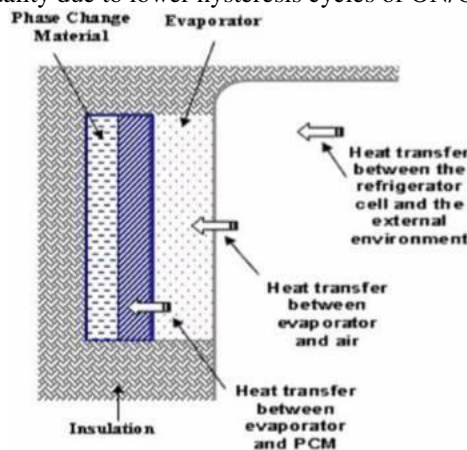


Fig -6: Schematic Model of Refrigerator with PCM.[30]



Number of observation	COP found in Vapor compression Refrigerator Without PCM	COP found in Vapor compression Refrigerator With PCM
1	6.12	9.85
2	5.55	9.42
3	6.12	9.45
4	5.5	9.04
5	5.13	9
6	6.78	9
7	5.1	9
8	5.11	8.91
9	5.02	8.82
10	5.02	8.91

Fig -7: Effect of PCM on COP.[30]

III. CONCLUSION

In this paper review of cold thermal energy storage using phase change material has been carried out. The results of application of organic, inorganic and eutectic type of PCM for cold thermal energy storage has been studied. It implies that mostly eutectic type of PCM are efficient and recommended for TES system. The performance of refrigerator by using PCM and without using PCM also reviewed. It shows that phase change material enhances the efficiency of refrigerator and reduced the compressor on/off timing. That’s why utilization of phase change material plays vital role in energy storage methods.

REFERENCES

1. "BP Statistical Review of world energy, 2016" (PDF).
2. Tripathi, Bhasker (26 March 2018). "Now, India is the third largest electricity producer ahead of Russia, Japan". Business Standard India. Retrieved 27 September 2019.
3. M. Young, The Technical Writer’s Handbook. Mill Valley, CA: University Science, 1989.
4. A Comprehensive Review of Thermal Energy Storage Ioan Sarbu4 and Calin Sebarchievi; ustainability 2018, 10, 191; doi:10.3390/su10010191.
5. E. Oró a, A. de Gracia a, A. Castell a, M.M. Farid b, L.F. Cabeza, a Review on phase change materials (PCMs) for cold thermal energy storage applications; <http://dx.doi.org/10.1016/j.apenergy.2012.03.058>
6. A. Sharma, V. Tyagi, C. Chen, D. Buddhi, Review on thermal energy storage with phase change materials and applications, Renewable and Sustainable Energy Reviews 13 (2) (2009) 318- 3456.
7. F. Agyenim, N. Hewitt, P. Eames, M. Smyth, A review of materials, heat transfer and phase change problem formulation for latent heat thermal energy storage systems (LHTESS), Renewable Sustainable Energy Rev. 14 (2010) 615–628.
8. J. Luo, L. Zhao, Y. Yang, G. Song, Y. Liu, L. Chen, G. Tang, Emulsifying ability and cross-linking of silk fibroin microcapsules containing phase change materials, Sol. Energy Mater. Sol. Cells 147 (2016) 144-149s.
9. I. M. Rasta, I. N. Suamir The role of vegetable oil in water based Phase change Material for medium temperature refrigeration. <https://doi.org/10.1016/j.est.2017.12.014> Mr. Rajesh H. Davda1, Mr. Noor Mohammed, “Text Detection, Removal and Region Filling Using Image Inpainting”, International Journal of Futuristic Science Engineering and Technology, vol. 1 Issue 2, ISSN 2320 – 4486, 2013.
10. Lin Liang and Xi Chen Preparation and Thermal Properties of Eutectic Hydrate Salt Phase Change Thermal Energy Storage Material <https://doi.org/10.1155/2018/6432047>
11. R. Baetens, B. P. Jelle, A. Gustavsen, Phase change materials for building applications: A state-of-the-art review, Energy and Buildings In Press, Accepted Manuscript (2010).
12. M. M. Farid, A. M. Khudhair, S. A. K. Razack, S. Al- Hallaj, A review on phase change energy storage: materials and applications, Energy Conversion and Management 45 (9-10) (2004) 1597– 1615.

13. Y. Liu and Y. Yang, "Preparation and thermal properties of $\text{Na}_2\text{CO}_3 \cdot 10\text{H}_2\text{O} - \text{Na}_2\text{HPO}_4 \cdot 12\text{H}_2\text{O}$ eutectic hydrate salt as a novel phase change material for energy storage," *Applied Thermal Engineering*, vol. 112, pp. 606-609, 2017.
14. A. Efimova, S. Pinnau, M. Mischke, C. Breitkopf, M. Ruck, and P. Schmidt, "Development of salt hydrate eutectics as latent heat storage for air conditioning and cooling," *Thermochimica Acta*, vol. 575, pp. 276-278, 2014.
15. G. Li, B. B. Zhang, X. Li, Y. Zhou, Q. G. Sun, and Q. Yun, "The preparation, characterization and modification of a new phase change material: $\text{CaCl}_2 \cdot 6\text{H}_2\text{O} - \text{MgCl}_2 \cdot 6\text{H}_2\text{O}$ eutectic hydrate salt," *Solar Energy Materials and Solar Cells*, vol. 126, pp. 51-55, 2014.
16. Yamagishi Y, Sugeno T, Ishige T. An evaluation of microencapsulated PCM for use in cold energy transportation medium. In: Energy conversion engineering conference. IECEC 96. Proceedings of the 31st intersociety, vol. 3; 1996.p.2077-83.
17. Han B, Choi JH, Dantzig JA, Bischof JC. A quantitative analysis on latent heat of an aqueous binary mixture. *Cryobiology* 2006; 52:146-51.
18. Liesebach J, Lim M, Rades T. Determination of unfrozen matrix concentrations at low temperatures using stepwise DSC. *Thermochimica Acta* 2004; 411: 43-51.
19. Kamsa P, Bokor M, Pyda M, Tompa K. DSC approach for the investigation of mobile water fractions in aqueous solutions of NaCl and Tris buffer. *Thermochimica Acta* 2007; 464: 29-34.
20. Yilmaz, S. Paksoy, H.O. 2012. Subcooling in phase change materials used for cooling. In: Proceedings of In no stock 13th International Conference on Energy Storage, Lleida, Spain.
21. Yilmaz, S. Altunbas Sahin, E., Kardas, G. Paksoy, H.O. 2013. A new approach for testing corrosion behaviours of various metals in contact with phase change materials. In: Proceedings of 2nd International Conference on Sustainable Energy Storage, Dublin, Ireland.
22. Oro, E. de Gracia, A. Castell, A. Farid, M.M. Cabeza, L.F. 2012. Review on phase change materials (PCMs) for cold thermal energy storage applications. *Appl. Energy* 99, 513e533. <http://dx.doi.org/10.1016/j.apenergy.2012.03.058>.
23. Mehling, H. and Cabeza, L.F. (2008) *Heat and Cold Storage with PCM: An Up To Date Introduction into Basics and Applications*, New York: Springer.
24. R. S. Khurmi, J. K. Gupta, *A Text Book of Refrigeration and Air-conditioning*.
25. P.N. Anathanarayan *Basic Refrigeration and Air Conditioning* third edition.
26. S.N. Sapali *Refrigeration and Air Conditioning* second edition.
27. Applications of Refrigeration and Air Conditioning by admin | Jul 2017 | Beginners, Blog, Mechanical Engineering; <https://i1.wp.com/www.mechlectures.com/wp-content/uploads/2017/07/refrigeration.jpg>.
28. K. Azzouz, D. Leducq, J. Guilpart, D. Gobin, Improving the energy efficiency of a vapor compression system using a phase change material, in: *Second Conference on Phase Change Material and Slurry: Scientific Conference and Business Forum*, 2005, pp.15-17.
29. M. I. H. Khan, H. M. Afroz, Effect of Phase Change Material on Performance of a Household Refrigerator, *Asian Journal of Applied Sciences*, 6(2) (2013) 56-67.
30. Rezaur Rahman, Md. Arafat Hossain, Shubhra Kanti Das & Adnan Hasan, Performance Improvement of a Domestic Refrigerator by using PCM (Phase Change Material).
31. A. Marques, G. Davies, G. Maidment, J. Evans, I. Wood, Novel design and performance enhancement of domestic refrigerators with thermal storage, *Applied Thermal Engineering*, 63 (2) (2014) 511-519.
32. "All India Installed Capacity of Utility Power Stations".
33. "Scenarios/CO2 emissions/India". International Energy Agency. Retrieved 8 March 2019.
34. "Growth of Electricity Sector in India from 1947- 2019" (PDF). Central Electricity Authority. May 2018. Retrieved 28 August 2019.
35. <http://hyperphysics.phy-astr.gsu.edu/hbase/thermo/phase.html>
36. Manish K. Rathod Jyotirmay Banerjee Thermal stability of phase change materials used in latent heat energy storage systems: A review; Department of Mechanical Engineering, S. V. National Institute of Technology, Surat 395 007, Gujarat, India (2012).



INNO SPACE
SJIF Scientific Journal Impact Factor
Impact Factor: 8.118



ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA



INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

 **9940 572 462**  **6381 907 438**  **ijirset@gmail.com**



www.ijirset.com

Scan to save the contact details