

e-ISSN: 2319-8753 | p-ISSN: 2347-6710

DIA

International Journal of Innovative Research in SCIENCE | ENGINEERING | TECHNOLOGY

INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

Volume 13, Issue 5, May 2024

INTERNATIONAL STANDARD SERIAL NUMBER INDIA

Impact Factor: 8.423

9940 572 462

6381 907 438

🖂 ijirset@gmail.com

|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

DOI:10.15680/IJIRSET.2024.1305190

Air and Sound Pollution Monitoring System Using IOT Esp32

Gujar Bhakti¹, Malbhage Sangita², Nalkar Pooja³, Shelar Gayatri⁴, Prof. N. S. Sapike⁵

Department of Computer Engineering, Vishwabharati Academy's College of Engineering, Ahmednagar, India^{1,2,3,4}

Professor, Department of Computer Engineering, Vishwabharati Academy's College of Engineering,

Ahmednagar, India⁵

ABSTRACT: This air quality monitoring system integrates diverse sensing elements, employing an ESP32 microcontroller as the central processing unit. The system encompasses a gas sensor, smoke sensor, dust sensor, and CO2 sensor, each dedicated to quantifying distinct airborne pollutants. These sensors collectively contribute to a comprehensive assessment of air quality. Additionally, an ultrasonic sensor is incorporated to measure distance in centimeters, offering a means to gauge pollution levels across different spatial zones. Complementing this, a sound sensor is employed for acoustic monitoring, facilitating the evaluation of ambient noise levels within a specific environment. The system's output is disseminated through a Blynk app, providing a user-friendly interface for real-time data visualization and analysis. Furthermore, an LCD display serves as an auxiliary output mechanism, enhancing the accessibility of information on-site. This amalgamation of sensors and data dissemination mechanisms creates a robust platform for monitoring and analyzing various environmental parameters, making it a versatile tool for comprehensive air quality assessment.

KEYWORDS: ESP32 microcontroller, gas sensor, smoke sensor, dust sensor, CO2 sensor, ultrasonic sensor, sound sensor, Blynk app, LCD display, air quality monitoring system, airborne pollutants, comprehensive assessment.

I. INTRODUCTION

The escalating global issue of air pollution, adversely impacting populations worldwide, necessitates advanced air quality monitoring systems to address health concerns. These systems are crucial for tracking diverse pollutants in the air, such as those contributing to respiratory infections, heart disease, and cancer. However, conventional air quality monitoring systems pose challenges due to their high cost, installation complexities, and maintenance difficulties, rendering them inaccessible, particularly in developing nations. To address this gap, there is a compelling need for the development of a cost-effective, user-friendly air quality monitoring system that can be deployed across various settings.

The primary objective of an IoT-based air and noise pollution monitoring system is to address the pressing issue of escalating air pollution, recognizing that clean air is vital for human survival. The adverse effects of air pollution, causing significant harm to individuals, underscore the importance of monitoring and mitigating pollution levels. With over seven million annual fatalities attributed to air pollution globally, it is imperative to develop innovative solutions. The proposed system aims to leverage Internet of Things (IoT) technology to create an efficient air pollution monitoring system capable of providing real-time data over a web server. This system is designed to trigger alarms when air quality deteriorates beyond predefined thresholds, indicating the presence of harmful gases such as CO2, smoke, alcohol, benzene, and NH3.

The IoT-based Air Pollution Monitoring System integrates the MQ135 sensor as the air quality sensor of choice, known for its accurate detection of various harmful gases. This sensor will relay air quality data to a web server, presenting information on an LCD display and a dedicated webpage. This enables remote monitoring of pollution levels, enhancing accessibility and facilitating prompt responses to deteriorating air quality conditions. By employing IoT technology, users can remotely access pollution data through computers or mobile devices. The system's versatility is highlighted by its ability to trigger devices like exhaust fans or send alert notifications via SMS or email when pollution levels surpass predefined thresholds. This innovative approach leverages technology to address the challenges posed by air pollution, providing a comprehensive solution for monitoring and managing air quality in diverse environments.



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

DOI:10.15680/IJIRSET.2024.1305190

II. RELATED WORK

The existing landscape of air and sound pollution monitoring systems has seen significant developments, with the integration of IoT technology and the ESP32 microcontroller showcasing promising advancements. However, certain drawbacks and limitations persist, paving the way for further refinement and innovation. One notable drawback lies in the complexity and cost associated with traditional air quality monitoring systems, which often hinder their widespread adoption, especially in resource-constrained environments such as developing countries. The expenses related to installation, maintenance, and equipment procurement can be prohibitive, limiting the accessibility of these systems to a broader demographic. This underscores the need for more cost-effective and user-friendly alternatives that leverage IoT technologies, like the proposed system utilizing ESP32.

Another drawback of existing systems lies in the limited scalability and adaptability to diverse environmental conditions. Many current air and sound pollution monitoring systems are designed for specific use cases or fixed environments, making them less versatile for deployment in varied settings. The lack of adaptability restricts their effectiveness in addressing the dynamic nature of pollution levels across different geographical locations and varying urban landscapes. The proposed IoT-based system with ESP32 aims to overcome these limitations by providing a scalable and adaptable solution that can be easily deployed in a variety of settings, promoting widespread usability and relevance.

Additionally, the reliance on traditional monitoring methods in existing systems may lead to delays in data acquisition and analysis. These systems often lack real-time capabilities, which are crucial for promptly responding to fluctuations in pollution levels. The proposed IoT system using ESP32 addresses this drawback by enabling real-time data monitoring and analysis, facilitated through seamless connectivity to a web server. This ensures that stakeholders receive timely information, allowing for immediate responses to mitigate adverse air and sound pollution conditions.

Furthermore, the existing systems may lack comprehensive integration of both air and sound pollution monitoring, focusing predominantly on one aspect while neglecting the other. This siloed approach limits the holistic understanding of environmental conditions. The proposed system employing IoT and ESP32 addresses this limitation by integrating both air and sound pollution monitoring capabilities. This comprehensive approach provides a more nuanced understanding of the environmental context, allowing for more informed decision-making and effective pollution management strategies. In conclusion, while existing systems have made strides in monitoring air and sound pollution, the drawbacks highlight the importance of continued innovation, as demonstrated by the proposed IoT-based solution leveraging the ESP32 microcontroller.



Fig. Sound sensor



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

| DOI:10.15680/IJIRSET.2024.1305190 |

A sound sensor is a device that converts sound waves into electrical signals. It combines a microphone and processing circuitry on a small board. It measures sound intensity and produces a digital output signal using a microphone and LM393 level comparator chip.

Sound sensors can be classified into two main types:

Microphones: Microphones work by converting sound vibrations into electrical signals. There are two main types of microphones: dynamic microphones and condenser microphones. Dynamic microphones are more rugged and durable, while condenser microphones are more sensitive and have a wider frequency response.

Piezoelectric sensors work by converting mechanical stress into electrical signals. They are less sensitive than microphones, but they are also more rugged and can be used to detect a wider range of noise quality.

III. PROPOSED METHODOLOGY

The proposed methodology for implementing an IoT-based air and sound pollution monitoring system is rooted in the deployment of a networked array of specialized sensors, leveraging advanced connectivity technologies and sophisticated data analytics platforms. The system strategically incorporates air quality sensors deployed in key locations to measure diverse pollutant levels, encompassing particulate matter, gases, and volatile organic compounds (VOCs). Simultaneously, sound sensors are strategically positioned to capture ambient noise levels and patterns within the environment.

The sensor nodes communicate their data to a central data management system through either wireless or wired communication protocols, facilitating seamless data transfer. This central data management hub serves as the nexus for aggregating and coordinating the information gathered by the distributed sensor network. Subsequently, the amassed data undergoes real-time processing and analysis, facilitated by cloud-based analytics platforms. This approach ensures that the system operates with efficiency and agility, enabling timely responses to dynamic environmental conditions.

End-users, including authorities, environmental agencies, and individuals, gain access to the monitoring system through web or mobile applications. These user interfaces provide intuitive visualizations of pollution data, real-time alerts, and access to historical data trends. By offering a user-friendly experience, the proposed system empowers stakeholders to make informed decisions based on the comprehensive insights derived from the amalgamated air and sound pollution data.

The IoT-based Air Pollution Monitoring System integrates the MQ135 sensor as the air quality sensor of choice, known for its accurate detection of various harmful gases. This sensor will relay air quality data to a web server, presenting information on an LCD display and a dedicated webpage.

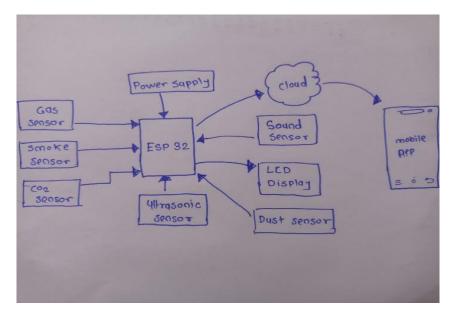


Fig 1. Proposed System Architecture



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

DOI:10.15680/IJIRSET.2024.1305190

The versatility of the proposed methodology extends to its capacity to integrate seamlessly with existing infrastructure, including smart city platforms and industrial monitoring systems. This integration enhances the overall efficacy of environmental monitoring by providing a comprehensive view of conditions. Such a holistic perspective allows for effective decision-making, as authorities can identify pollution hotspots, implement targeted pollution control measures, and proactively mitigate environmental challenges. In essence, the proposed methodology establishes a robust framework for real-time monitoring, analysis, and decision support in the realm of air and sound pollution, contributing to the advancement of sustainable and responsive environmental management practices.

IV. WORKING MODULE

The functionality of the air quality monitoring system is underpinned by the integration of diverse sensors and the ESP32 microcontroller. The project's working module involves a cohesive interaction among the gas sensor, smoke sensor, dust sensor, CO2 sensor, ultrasonic sensor, and sound sensor, all orchestrated by the ESP32 microcontroller. The gas sensor, equipped to detect specific gases present in the air, facilitates the quantification of pollutant levels, contributing crucial data for comprehensive air quality assessment. Simultaneously, the smoke sensor specializes in detecting smoke particles, aiding in the identification and measurement of combustion-related pollutants. Additionally, the dust sensor plays a pivotal role in measuring particulate matter concentrations, providing insights into airborne particle pollution. The CO2 sensor focuses on monitoring carbon dioxide levels, an essential metric for assessing indoor air quality and potential ventilation needs.

The ultrasonic sensor, employed in the project, serves a dual purpose by measuring distances in centimeters. This functionality is particularly valuable for spatial monitoring, allowing for the assessment of pollution levels in different areas. By leveraging ultrasonic waves, the sensor provides accurate distance measurements, contributing to the project's environmental monitoring capabilities. Furthermore, the sound sensor is integral for monitoring the ambient noise level within a specific environment. This sensor detects sound signals, enabling the system to assess noise pollution levels and contributing to a more comprehensive understanding of the overall environmental conditions.

The ESP32 microcontroller acts as the central processing unit, orchestrating the operation of the sensors and facilitating seamless communication between the various components. It manages data acquisition from the sensors and processes the information to derive meaningful insights into air quality and environmental parameters. The LCD display serves as a user interface, presenting real-time information on pollutant levels, distance measurements, and noise levels for onsite monitoring.

The Blynk app complements the system by providing a user-friendly interface for remote monitoring and control. Through this application, users can access data visualizations, receive alerts, and monitor environmental conditions in real-time. The collaborative synergy of these components creates a robust air quality monitoring system capable of offering valuable insights into pollutant concentrations, spatial variations, and ambient noise levels, contributing to informed decision-making and effective environmental management.

e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |



|| Volume 13, Issue 5, May 2024 ||

DOI:10.15680/IJIRSET.2024.1305190


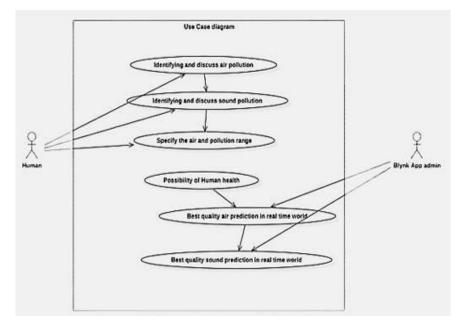


Fig 2. System Working Use Case

The air quality monitoring system incorporates a comprehensive array of sensors and a central ESP32 microcontroller for environmental parameter assessment. The sensing components include a gas sensor, smoke sensor, dust sensor, and CO2 sensor, specifically designed for measuring distinct airborne pollutants. The gas sensor provides data on various gases present in the air, the smoke sensor quantifies particulate matter from combustion processes, the dust sensor gauges airborne particulate concentration, and the CO2 sensor measures carbon dioxide levels. Additionally, an ultrasonic sensor is employed for precise distance measurement in centimeters, offering valuable insights into pollution levels across different spatial zones. The sound sensor is utilized to detect ambient noise, facilitating the monitoring of noise levels in a specific environment. The ESP32 microcontroller acts as the central processing unit, orchestrating the seamless integration of sensor data and enabling real-time analysis. This integrated system provides a comprehensive and technical approach to monitoring air quality and environmental conditions, ensuring a thorough assessment of pollutant levels and noise in a given area.

V. EXECUTION OF PROJECT

1. Overall project:

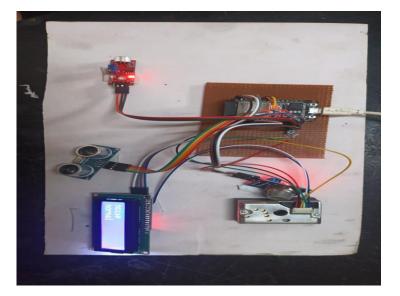



|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 || | DOI:10.15680/IJIRSET.2024.1305190 |

2. Air quality displayed on LCD display:



3. Noise quality displayed on LCD display:



4. Distance of object from the sensor displayed on LCD display:





|e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Refereed Journal |

|| Volume 13, Issue 5, May 2024 ||

DOI:10.15680/IJIRSET.2024.1305190

VI. CONCLUSION

In conclusion, the air quality monitoring system featuring an ESP32 microcontroller, an array of sensors including gas, smoke, dust, and CO2 sensors, alongside an ultrasonic sensor and a sound sensor, constitutes a comprehensive and technologically advanced solution for environmental monitoring. By utilizing specialized sensors, the system adeptly quantifies various pollutants in the air, providing a nuanced understanding of environmental conditions. The incorporation of an ultrasonic sensor enables precise distance measurement in centimeters, enhancing the system's capability to monitor pollution levels across diverse spatial zones. Additionally, the integration of a sound sensor facilitates the monitoring of ambient noise levels in specific environments, contributing to a holistic assessment of the overall environmental quality. The utilization of the ESP32 microcontroller serves as a robust central processing unit, orchestrating the seamless operation and integration of a Blynk app and an LCD display, providing users with accessible and immediate insights into air quality parameters. This amalgamation of cutting-edge sensors, microcontroller technology, and user interface components establishes a sophisticated and versatile air quality monitoring system poised to contribute significantly to environmental assessment and management.

REFERENCES

- 1. Abt E, Suh HH, Allen G, Koutrakis P. Characterization of indoor particle sources: A study conducted in the metropolitan Boston area. Environ Health Perspect. 2000;108(1):35–44. [PMC free article] [PubMed] [CrossRef]
- 2. Abu-Allaban M, Hamasha S, Gertler A. Road dust resuspension in the vicinity of limestone quarries in Jordan. J Air Waste Manag Assoc. 2006;56(10):1440–4. [PubMed] [CrossRef]
- 3. Abu-Allaban M, Lowenthal DH, Gertler AW, Labib M. Sources of PM(10) and PM (2.5) in Cairo's ambient air. Environ Monit Assess. 2007;133(1-3):417–25. [PubMed] [CrossRef]
- 4. Cormen, T. H., Leiserson, C. E., Rivest, R. L., Stein, C. (2009). Introduction to Air pollution system. MIT Press.
- Vishal Choudhary, Hock Beng Lim, Victoria Beltran, and Jun Hao Teh "AirQ: A Smart IoT Platform for Monitoring Air Quality" released in 2020 IEEE 17th Annual Consumer Communications & Networking Conference (CCNC), published on March 26, 2020, INSPEC Accession Number: 19488909.
- Qammer H. Abbasi, Rami Ghannam, Hadi Heidari, and Xuan Zhao Design and Application of a Portable Sensory System for Monitoring Air Pollution. University of Glasgow's Microelectronics Lab (meLAB), School of Engineering, G12 8QQ, U 2019 January Published
- 7. "An Effective Tracking System for Air and Sound Pollution Using IoT," by K. Cornelius, N. Komal Kumar, Sagar Pradhan, Priyesh Patel, and N. Vinay. IEEE, Department of Computer Science & Engineering, 23 April 2020
- 8. "Integrated Pollution Monitoring System for Smart City," by Baihaqi Siregar, IEEE posted in December 2016
- 9. Four Layer Wrist Worn Device For Sound Level and Hazardous Gases & Environmental Monitoring, IEEE, Published: February 2018 by Mostafa Haghi and Kerstin Thurow.
- 10. Huma S. Sayed, Yogesh M. Gajeria, Minarva J. Pandya, and Hiral Jariwala IEEE, published "Noise Pollution & Human Health: A Review" in March 2017.
- 11. Design And Implementation Of a Rain Sensor As a Protection System, IEEE, Published: July 2018 by Okafor Johnpaul Uzozie, Umezulike Obbinna Linuse, Okeke Chikwendu Pascal, and Omoniyi Olufemi Johnson
- 12. Marin B. Marinov, Ivan Topalov, ElitsaGieva, GeorgiNikolov, Air quality monitoring in urban environments, 2016 39th International Spring Seminar on Electronics Technology (ISSE), pp. 443-448
- David Marquez-Viloria, J. S. Botero-Valencia, Juan Villegas- Ceballos, A low cost georeferenced air-pollution measurement system used as early warning tool, 2016 XXI Symposium on SignalProcessing, Images and Artificial Vision (STSIVA), pp. 1-6
- 14. C, Air pollution monitoring using wireless sensor network, 2016 IEEE International WIE Conference on Electrical and Computer Engineering (WIECONECE), pp. 112-117
- 15. Mr.Vasim K. Ustad , Prof.A.S.Mali , Mr.Suhas S.Kibile- "Zigbee Based Wireless Air Pollution Monitoring System Using Low Costand Energy Efficient Sensors", 2014 International Journal of Engineering Trends and Technology (IJETT)
- 16. Chen Xiaojun, Liu Xianpeng, XuPeng, "IoT- Based Air Pollution Monitoring and Forecasting System", 2015 International Conference on Computer and Computational Sciences (ICCCS), pp. 257-260
- 17. Abdullah Kadri, Elias Yaacoub, Mohammed Mushtaha, Adnan AbuDayya, "Wireless sensor network for real-time air pollution monitoring",2013 1st International Conference onCommunications, Signal Processing, and their Applications (ICCSPA), pp. 1-5

INTERNATIONAL Standard Serial Number India







INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY





www.ijirset.com