

Experimental Investigation of Fibre Reinforced Concrete with Partial Replacement of Coarse Aggregate by Steel Slag

N.Manoj¹, Mrs.N.Nandhini²

PG Student, Department of Civil Engineering, Kongu Engineering College, India¹,

Assistant Professor, Department of Civil Engineering, Kongu Engineering College, India².manoj.n14@gmail.com¹,

ABSTRACT: Fiber-reinforced concrete (FRC) is concrete containing fibrous material which increases its structural integrity. It contains short discrete fibers that are uniformly distributed and randomly oriented. In addition, the character of fiber-reinforced concrete changes with varying concretes, fiber materials, geometries, distribution, orientation, and densities. Generally fibers do not increase the flexural strength of concrete, and so cannot replace moment-resisting or structural steel reinforcement. Indeed, some fibers actually reduce the strength of concrete. In this project work polyester fibers of 0.5%, 1%, 1.5% and 2% is used and its compressive, split tensile and flexural strength is determined. In this phase optimum dosage of concentration of fibers is determined. Steel slag was found to be the best replacement for natural aggregates of concrete. Steel slag which is produced as a waste material in the steel industry and has a negative impact on environment when disposed. In the course of future project work by the replacement of steel slag for the coarse aggregate in concrete of 25%, 50%, 75% & 100% with the addition of optimum polyester fibers to achieve the effective strength of concrete.

KEYWORDS: Polyester Fibres, Steel Slag.

I. INTRODUCTION

Concrete is one of the most widely used construction material in the world, it is usually associated with Ordinary Portland Cement (OPC) as the main component for making concrete. Production of one tonne of cement requires about 2 tonnes of raw materials of shale and limestone, and also releases large amount of carbon dioxide (CO₂) to the atmosphere that significantly contributes to Greenhouse gas Emissions. The amount of Carbon dioxide released during the manufacturing process of OPC is in the order of 1 ton for every ton of OPC produced. Globally, the OPC production contributes about 7% of the world's Carbon dioxide. This is adding about 1.6 billion tons of Carbon dioxide to the atmosphere.

Polyester Fibers Reinforced Concrete (PFRC) has been evaluated for use as a cement concrete pavement material. The study focused on laboratory evaluation of various mechanical and durability properties of PFRC. The PFRC exhibited improved flexural strength and compressive strength, split tensile strength over that of plain cement concrete (PCC). There is no significant change/reduction in resistance to durability as compared to PCC. There is also no reduction in the long-term properties of PFRC. It is concluded that polyester fibers are alkali resistant, and PFRC can be used in the pavement quality concrete (PQC), and as over lays, with no adverse effect on concrete. Polyester B matrix composites possess the best mechanical properties compared to the other polyester types (A, C and D) with TLK fiber reinforcement.

II. MATERIAL USED

2.1 Properties of polyester fibre

Polyester is a very important manmade fibre. Polyester is produced with a long chain synthetic polyester is produced by melt spinning process.

Table. 1 Properties of Polyester Fibre

Specific Gravity	Elongation At Break	Elastic Modulus	Elasticity	Melting Point	Color
1.38	15-30%	90	Good	250c	White

2.2 Materials used

Ordinary Portland cement 53 grade was used for casting of all the specimens and clean dry river sand and natural aggregates will be used. The natural river sand passing through IS 4.75mm sieve the specific gravity of fine aggregate is 2.85. Then natural coarse aggregate with specific gravity of 2.67 and passing through IS 20mm sieve. Cubes of 150x150x150 mm, cylinders of 300x150 mm and prisms of 500x100x100 mm were cast cured and tested for 7 days and 28 days.

III. MIX DESIGN

Table 2: Mix Proportion ratio

Water (litre/m ³)	Cement (Kg/m ³)	Fine Aggregate (Kg/m ³)	Coarse aggregate (Kg/m ³)
138	320	751	1356
0.4	1	2.34	4.23

IV. EXPERIMENTAL RESULTS

4.1 Compressive strength

Table 3. Compressive strength (% of fiber added)

Mix ratio	Compressive strength (N/mm ²)				
	Conventional concrete	0.5%	1%	1.5%	2%
M₂₅					
7 Days	18.25	20.14	23.85	23.95	18.54
14 Days	22.95	25.10	26.95	27.38	22.40
21 Days	26.95	30.15	30.20	27.85	25.15
28 Days	34.50	33.50	38.65	32.05	28.55

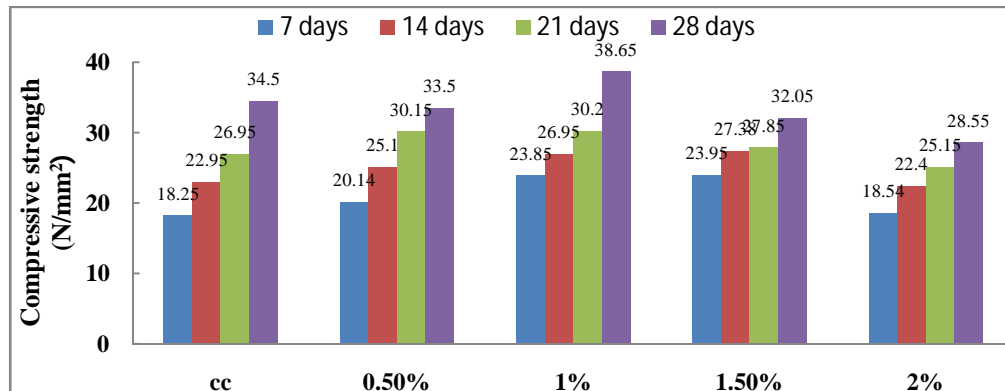


Fig 1. Compressive strength of concrete

4.2 Split tensile strength

Table 4. Split Tensile Strength (% of fiber added)

Mix ratio	Split Tensile Strength (N/mm ²)				
	Conventional concrete	0.5%	1%	1.5%	2%
M ₂₅					
7 Days	1.53	2.18	2.48	2.68	1.48
14 Days	1.88	2.38	2.75	2.74	1.68
21 Days	2.28	2.50	2.98	2.85	2.10
28 Days	2.65	2.68	3.12	2.98	2.45

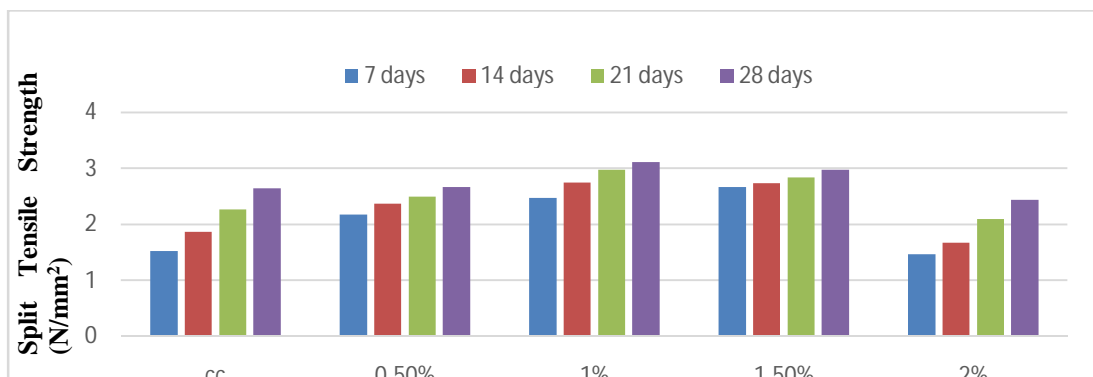


Fig 2. Split Tensile strength of concrete

4.3 Flexural strength

Table 5 Flexural Strength (% of fiber added)

Mix ratio	Flexural Strength (N/mm ²)	% of fiber added			
M ₂₅	Conventional concrete	0.5%	1%	1.5%	2%
7 Days	1.16	2.15	2.58	2.36	1.12
14 Days	1.88	3.85	3.88	4.25	1.5
21 Days	2.35	5.1	4.85	5.05	2.58
28 Days	3.28	5.88	7.18	6.15	3.15

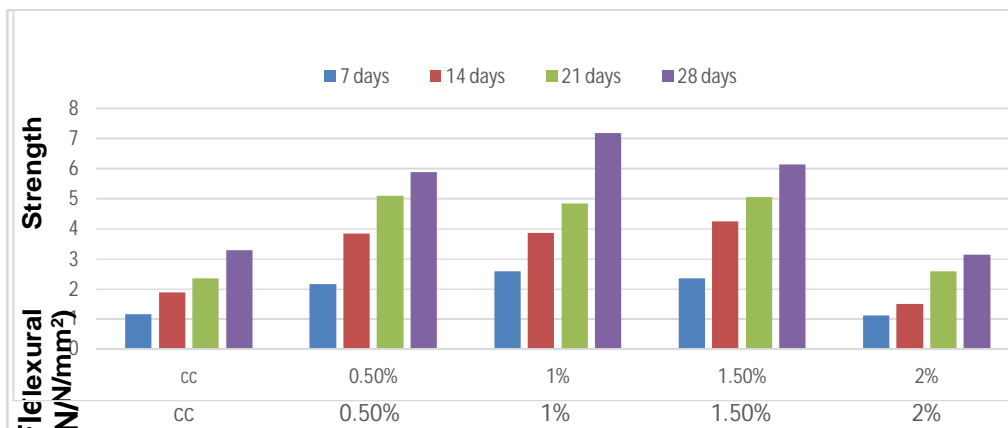


Fig 3. Flexural strength of concrete

V. CONCLUSION AND FUTUREWORK

Compressive strength of 1% polyester fiber reinforced concrete has found to be 10% increase in strength, when compared to that of Conventional concrete. Split tensile strength of 1% polyester fiber reinforced concrete has found to be 10% increase in strength, when compared to that of Conventional concrete.

Flexural strength of 1% polyester fiber reinforced concrete has found to be 20% increase in strength, when compared to that of Conventional concrete. Hence 1% concentration of polyester fiber is found to be the optimum dosage for his project work.

For the future work, the continuation of project research with the replacement of steel slag for the coarse aggregate to find the better optimum dosage and the effectiveness of concrete with the replacement.

REFERENCES

- [1]. Alizadeh, R., Chine, M., Ghods, P., Hussein, M., Montazer, Sh. and Shekarchi, M. (1996), *Utilization of electric arc furnace slag as aggregates in concrete* – Environmental Issue, CMI report.
- [2]. Bentur, A. and Alexander, M. G., (2000), "A Review of the Work of the RILEM TC 159 ETC: Engineering of the interfacial transition zone in cementitious compositions", *Material and Structures*, Vol. 33, March 2000, pp. 82-87.

International Journal of Innovative Research in Science, Engineering and Technology

An ISO 3297: 2007 Certified Organization

Volume 3, Special Issue 2, April 2014

Second National Conference on Trends in Automotive Parts Systems and Applications (TAPSA-2014)

On 21st & 22nd March, Organized by

Sri Krishna College of Engineering & Technology, Kuniamuthur, Coimbatore-641008, Tamilnadu, India

- [3]. Besari, M.S., (2007). "Review of Some Vital Physical Mechanical Parameters of Concrete", International Conference on Material Development in the Concrete Industry, Jakarta, Indonesia.
- [4]. BIS: 516-1959, "Methods of Tests for Strength of Concrete", Bureau of Indian Standards, New Delhi.
- [5]. BIS: 383-1970 (reaffirmed 1997) "Specification for Coarse and Fine Aggregates from Natural Source for Concrete", New Delhi.
- [6]. BIS: 12269-1987 (reaffirmed 1999) "Specification for 53 grade Ordinary Portland Cement", New Delhi.
- [7]. BIS: 456-2000 (reaffirmed 2005) "Plain and Reinforced Concrete – Code of Practice", Fourth Revision, pp.14.
- [8]. BIS: 5816-1970, "Methods of Test for Splitting Tensile of Concrete Cylinders", Bureau of Indian Standards, New Delhi.
- [9]. Head, M.K., Wong, H.S. and Buenfeld, N. R., (2008), "Characterizing Aggregate Geometry in thin Section of Mortar and Concrete", Cement and Concrete Research, Vol. 38 pp. 1227-1231.
- [10]. Han A. L., and Tudjono S., (2008), "The Study of Concrete with Industrial Steel slag Aggregates based on the Substitution method", 5th International Conference on Concrete, Singapore, August 2008.
- [11]. Han, A. L. and Tudjono, S., (2007), "PT Inti General Yaja Slag Replacing Puduk-Payung Aggregates for Concrete, an Experimental Research". Proceeding of the National Seminar "Steel Development and Its Impact on Environmental Issues", Diponegoro University- AMBI (Indonesian Steel Community Association), Semarang, 23 July 2007.
- [12]. Honarmand, M. (2007), the methods of producing slag, Conference of Arc Furnace Slag, Isfahan, Iran.
- [13]. Leonardo, K., Pramono A., Rike, I. and Tirta A., (2008), "Experimental Research for the use of Coarse and Fine Slag Aggregates in Concrete", Thesis, Material and Structural Laboratory, Diponegoro University, Semarang, Indonesia.
- [14]. Mozt, H. and Geiseler, J. (2000), Products of steel slags, Woolley, G.R., Goumans, J.J.J.M., Ainright, P.J. (Eds.), Inter. Conf. on the Science and Engineering of Recycling for Environmental Protection, WASCAN 2000, Harrogate (UK) 2000, vol. I, pp. 207–220.
- [15]. Maslehuddin, M., Alfarabi, M., Shammem, M., Ibrahim, M., Barry, M. (2003), Comparison of properties of steel slag and crushed limestone aggregate concretes, Construction and Building Materials, vol. 17, pp.105–12.
- [16]. Mahieux, P. Y., Aubert, J. E. and Escadeillas, G. (2009), Utilization of weathered basic oxygen furnace slag in the production of hydraulic road binders, Construction and Building Materials 23, pp.742–747.
- [17]. Neville, A., (2003), "Properties of Concrete", Fourth Edition, Prentice Hall, New Jersey.
- [18]. Purwono, L. A. and Nurhayanti, S., (2007), "TinjauanEksperimentalKuatTekanBetonDenganCampuranLimbah Slag" (Experimental study for determining the compression strength of concrete using slag waste), Thesis, Civil Engineering Department, Diponegoro University, Semarang.
- [19]. Qasrawi, H., Shalabi, F. and Asi, I. (2009), Use of low CaO unprocessed steel slag in concrete as fine aggregate, Construction and Building Materials 23, pp.1118-1125.
- [20]. Shekarchi, M., Alizadeh, R., Chini, M., Ghods, P., Hoseini, M. and Montazer, S. (2003), Study on electric arc furnace slag properties to be used as aggregates in concrete, CANMET/ACI International Conference on Recent Advances in Concrete Technology, Bucharest, Romania.
- [21]. Shekarchi, M., Soltani, M., Alizadeh, R., Chini, M., Ghods, P., Hoseini, M. and Montazer, Sh. (2004), Study of the mechanical properties of heavyweight preplaced aggregate concrete using electric arc furnace slag as aggregate, International Conference on Concrete Engineering and Technology, Malaysia.
- [22]. Shi, C. and Qian, J. (2000), High performance cementing materials from industrial slag – review, Resource Conserve Recycle , vol 29, pp.195–207.
- [23]. Tehra. Geopave (1993), Technical note on Steel Slag Aggregate, Vol. 9, pp.1.
- [24]. Wu, S., Xue, Y. and Chen, Q.Y. (2007), Utilization of steel slag as aggregates for stone mastic asphalt (SMA) mixtures, Building and Environment, vol.42, pp.2580–5.
- [25]. Wu, K., Yan, A. and Yao, W. (2001), Effect of metallic aggregate on strength and fracture properties of HPC, Cement and Concrete Research 31, pp. 113-118.