

Effect of Injection Pressure and Timing on Performance Parameters and Exhaust Emissions of High Grade Semi Adiabatic Diesel Engine with Cotton Seed Biodiesel

D. Srikanth, M.V.S. Murali Krishna, P. Usha Sri

Department of Mechanical Engineering, Sagar Group of Educational Institutions, Chevella, Hyderabad, Telangana State, India

Department of Mechanical Engineering, ChaitanyaBharathi Institute of Technology, Hyderabad, Telangana India

Department of Mechanical Engineering, College of Engineering, Osmania University, Hyderabad, Telangana State, India

ABSTRACT: Biodiesel derived from feed stock of crude vegetable oils are renewable, biodegradable, provide energy security and foreign exchange savings besides addressing environmental concerns and socio-economic issues. However drawbacks associated with biodiesel of moderate viscosity and low volatility which cause combustion problems in CI engines, call for engine with hot combustion chamber, for burning biodiesel effectively. Investigations were carried out to evaluate the performance and determine exhaust emissions with low heat rejection combustion chamber with cotton seed biodiesel. It consisted of an air gap insulated piston with superni (an alloy of nickel) crown, an air gap insulated liner with superni insert and ceramic coated cylinder head with cotton seed biodiesel with varied injector opening pressure. Performance parameters of brake thermal efficiency, brake specific energy consumption, exhaust gas temperature, coolant load and volumetric efficiency were determined at full load operation of the engine. Exhaust emissions of particulate emissions and nitrogen oxide were measured at full load operation of the engine. The optimum injection timing with conventional engine (CE) was 31° bTDC (before top dead centre), while it was 28° bTDC for engine with LHR combustion chamber with biodiesel. Comparative studies were made for engine with LHR combustion chamber and CE at manufacturer's recommended injection timing (27° bTDC) and optimum injection timing with biodiesel operation. Engine with LHR combustion chamber with biodiesel showed improved performance at 27° bTDC and at optimum injection timing over CE. Particulate emissions reduced with biodiesel operation on LHR engine.

KEYWORDS: Vegetable oil, Biodiesel; Conventional engine, LHR combustion chamber; Fuel performance; Exhaust emissions, Injector opening pressure

I. INTRODUCTION

Fossil fuels are limited resources; hence, search for renewable fuels is becoming more and more prominent for ensuring energy security and environmental protection. It has been found that the vegetable oils are promising substitute for diesel fuel, because of their properties are comparable to those of diesel fuel. They are renewable and can be easily produced. When Rudolph Diesel, first invented the diesel engine, about a century ago, he demonstrated the principle by employing peanut oil. He hinted that vegetable oil would be the future fuel in diesel engine [1]. Several researchers experimented the use of vegetable oils as fuel on conventional engines (CE) and reported that the performance was poor, citing the problems of high viscosity, low volatility and their polyunsaturated character. It caused the problems of piston ring sticking, injector and combustion chamber deposits, fuel system deposits, reduced power, reduced fuel economy and increased exhaust emissions [1–5].

The problems of crude vegetable oils can be solved to some extent, if these oils are chemically modified (esterified) to biodiesel. Biodiesels derived from vegetable oils present a very promising alternative for diesel fuel, since they have numerous advantages compared to fossil fuels. Studies were made with biodiesel on CE [6–10]. They reported from their

International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 3, March 2016

investigations that biodiesel operation showed comparable thermal efficiency, decreased particulate emissions and increased nitrogen oxide (NO_x) levels, when compared with mineral diesel operation.

Experiments were conducted on preheated vegetable oils in order to equalize their viscosity to that of mineral diesel may ease the problems of injection process [11–13]. Investigations were carried out on engine with preheated vegetable oils. They reported that preheated vegetable oils marginally increased thermal efficiency, decreased particulate matter emissions and NO_x levels, when compared with normal biodiesel.

Increased injector opening pressure may also result in efficient combustion in compression ignition engine [14–15]. It has a significance effect on performance and formation of pollutants inside the direct injection diesel engine combustion. Experiments were conducted on engine with biodiesel with increased injector opening pressure. They reported that performance of the engine was improved, particulate emissions were reduced and NO_x levels were increased marginally with an increase of injector opening pressure.

The drawbacks associated with biodiesel (high viscosity and low volatility) call for hot combustion chamber, provided by low heat rejection (LHR) combustion chamber. The concept of the engine with LHR combustion chamber is reduce heat loss to the coolant with provision of thermal resistance in the path of heat flow to the coolant. Three approaches that are being pursued to decrease heat rejection are (1) Coating with low thermal conductivity materials on crown of the piston, inner portion of the liner and cylinder head (low grade LHR combustion chamber); (2) air gap insulation where air gap is provided in the piston and other components with low-thermal conductivity materials like superni (an alloy of nickel), cast iron and mild steel (medium grade LHR combustion chamber); and (3) high grade LHR engine contains air gap insulation and ceramic coated components.

Experiments were conducted on engine with high grade LHR combustion chamber with biodiesel. It consisted of an air gap (3 mm) insulation in piston as well as in liner and ceramic coated cylinder head. The engine was fuelled with biodiesel with varied injector opening pressure and injection timing [16–22]. They reported from their investigations, that engine with LHR combustion chamber at an optimum injection timing of 28° bTDC with biodiesel increased brake thermal efficiency by 10–12%, at full load operation—decreased particulate emissions by 45–50% and increased NO_x levels, by 45–50% when compared with mineral diesel operation on CE at 27° bTDC.

The present paper attempted to determine the performance and exhaust emissions of the engine with high grade LHR combustion chamber. It contained an air gap (3.2 mm) insulated piston, an air gap (3.2 mm) insulated liner and ceramic coated cylinder head with cotton seed biodiesel with different operating conditions with varied injection timing and injector opening pressure. Results were compared with CE with biodiesel and also with diesel at similar operating conditions.

II. MATERIAL AND METHOD

Cottonseeds have approximately 18% (w/w) oil content. India's cottonseed production is estimated to be around 35% of its cotton output (approximately 4.5 million metric tons). Approximately 0.30 million metric ton cottonseed oil is produced in India and it is an attractive biodiesel feedstock [5]

2.1 Preparation of biodiesel

The chemical conversion of esterification reduced viscosity four fold. Crude cotton seed oil contains up to 70% (wt.) free fatty acids. The methyl ester was produced by chemically reacting crude cotton seed oil with methanol in the presence of a catalyst (KOH). A two-stage process was used for the esterification of the crude cotton seed oil [5]. The first stage (acid-catalyzed) of the process is to reduce the free fatty acids (FFA) content in cotton seed oil by esterification with methanol (99% pure) and acid catalyst (sulfuric acid-98% pure) in one hour time of reaction at 55°C . Molar ratio of cotton seed oil to methanol was 9:1 and 0.75% catalyst (w/w). In the second stage (alkali-catalyzed), the triglyceride portion of the cotton seed oil reacts with methanol and base catalyst (sodium hydroxide-99% pure), in one hour time of reaction at 65°C , to form methyl ester (biodiesel) and glycerol. To remove un-reacted methoxide present in raw methyl ester, it is purified by the process of water washing with air-bubbling.


The properties of the Test Fuels used in the experiment were presented in Table-1. [5].

Table.1 Properties of test fuels [5]

Property	Units	Diesel (DF)	Biodiesel(BD)	ASTM Standard
Carbon Chain	--	C ₈ -C ₂₈	C ₁₆ -C ₂₄	---
Cetane Number	-	51	56	ASTM D 613
Specific Gravity at 15°C	-	0.8275	0.8673	ASTM D 4809
Bulk Modulus at 15°C	MPa	1408.3	1564	ASTM D 6793
Kinematic Viscosity @ 40°C	cSt	2.5	5.44	ASTM D 445
Air Fuel Ratio (Stoichiometric)	--	14.86	13.8	--
Flash Point (Pensky Marten's Closed Cup)	°C	120	144	ASTM D93
Cold Filter Plugging Point	°C	Winter 6° C Summer 18°C	3° C	ASTM D 6371
Pour Point	°C	Winter 3°C Summer 15°C	0°C	ASTM D 97
Sulfur	(mg/kg, max)	50	42	ASTM D5453
Low Calorific Value	MJ/kg	42.0	39.9	ASTM D 7314
Oxygen Content	%	0.3	11	--

2.3 Engine with LHR combustion chamber

Fig.1 shows assembly details of insulated piston, insulated liner and ceramic coated cylinder head. Engine with LHR combustion chamber contained a two-part piston; the top crown made of superni was screwed to aluminium body of the piston, providing an air gap (3.2 mm) in between the crown and the body of the piston by placing a superni gasket in between the body and crown of the piston.

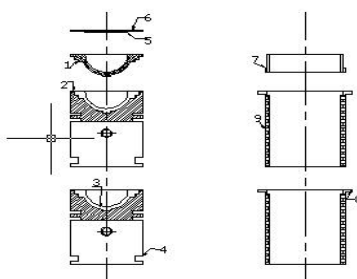

1.Pistoncrown with threads, 2. Superni gasket, 3.Air gap in piston, 4. Body of piston, 5. Ceramic coating on inside portion of cylinder head, 6. Cylinder head, 7.Superni insert with threads, 8.Air gap in liner, 9.Liner


Fig.1 Assembly details of air gap insulated piston, air gap insulated liner and ceramic coated cylinder head

A superni insert was screwed to the top portion of the liner in such a manner that an air gap of 3.2 mm was maintained between the insert and the liner body. At 500 °C the thermal conductivity of superni and air are 20.92 and 0.057 W/m-K. Partially stabilized zirconium (PSZ) of thickness 500 microns was coated by means of plasma coating technique. The combination of low thermal conductivity materials of air, superni and PSZ provide sufficient insulation for heat flow to the coolant, thus resulting in LHR combustion chamber.

2.4 Experimental set-up

The schematic diagram of the experimental setup used for the investigations on the engine with LHR combustion chamber with cotton seed biodiesel is shown in Fig.2. Specifications of Test engine are given in Table2. The engine was coupled with an electric dynamometer (Kirloskar), which was loaded by a loading rheostat. The fuel rate was measured by Burette. The accuracy of brake thermal efficiency obtained is ±2%. Provision was made for preheating of biodiesel to the required levels (90°C) so that its viscosity was equalized to that of diesel fuel at room temperature. Air-consumption of the engine was obtained with an aid of air box, orifice flow meter and U-tube water manometer assembly. The naturally aspirated engine was provided with water-cooling system in which outlet temperature of water

was maintained at 80°C by adjusting the water flow rate. The water flow rate was measured by means of analogue water flow meter, with accuracy of measurement of ±1%.

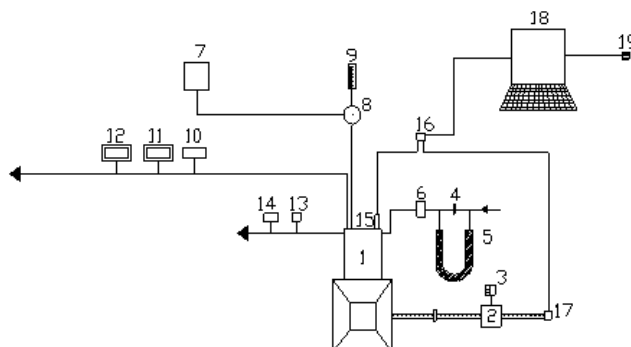

1.Four Stroke Kirloskar Diesel Engine, 2.Kirloskar Electrical Dynamometer, 3.Load Box, 4.Orifice flow meter, 5.U-tube water manometer, 6.Air box, 7.Fuel tank, 8, Pre-heater 9.Burette, 10. Exhaust gas temperature indicator, 11.AVL Smoke opacity meter, 12. Netel Chromatograph NO_x Analyzer, 13.Outlet jacket water temperature indicator, 14. Outlet-jacket water flow meter, 15.AVL Austria Piezo-electric pressure transducer, 16.Console, 17.AVL Austria TDC encoder, 18.Personal Computer and 19.Printer.

Fig.2 Schematic diagram of experimental set-up

Engine oil was provided with a pressure feed system. No temperature control was incorporated, for measuring the lube oil temperature. Copper shims of suitable size were provided in between the pump body and the engine frame, to vary the injection timing. Injector opening pressure was changed from 190 bar to 270 bar using nozzle testing device. The maximum injector opening pressure was restricted to 270 bar due to practical difficulties involved. Coolant water jacket inlet temperature, outlet water jacket temperature and exhaust gas temperature were measured by employing iron and iron-constantan thermocouples connected to analogue temperature indicators. The accuracies of analogue temperature indicators are ±1%. Exhaust emissions of particulate matter and nitrogen oxides (NO_x) were recorded by smoke opacity meter (AVL India, 437) and NO_x Analyzer (Netel India; 4000 VM) at full load operation of the engine. Analyzers were allowed to adjust their zero point before each measurement. To ensure that accuracy of measured values was high, the gas analyzers were calibrated before each measurement using reference gases.

Table.2 Specifications of Test Engine

Description	Specification
Engine make and model	Kirloskar (India) AV1
Maximum power output at a speed of 1500 rpm	3.68 kW
Number of cylinders ×cylinder position× stroke	One × Vertical position × four-stroke
Bore × stroke	80 mm × 110 mm
Engine Displacement	553 cc
Method of cooling	Water cooled
Rated speed (constant)	1500 rpm
Fuel injection system	In-line and direct injection
Compression ratio	16:1
BMEP @ 1500 rpm at full load	5.31 bar
Manufacturer's recommended injection timing and injector opening pressure	27°bTDC × 190 bar
Number of holes of injector and size	Three × 0.25 mm
Type of combustion chamber	Direct injection type

III. RESULTS AND DISCUSSION

3.1 Performance parameters

The optimum injection timing with CE was 31°bTDC, while t was 28°bTDC for engine with LHR combustion chamber with diesel operation [23-24]. Corresponding values for biodiesel operation were 31° bTDC for CE and 28° bTDC LHR engine. [25].

Fig.3 presents bar charts showing the variation of peak BTE with test fuels. This Fig indicates that CE with biodiesel at 27° bTDC showed comparable performance at all loads. The presence of oxygen in fuel composition might have improved performance with biodiesel operation, when compared with mineral diesel operation on CE at 27°bTDC. CE with biodiesel operation at 27°bTDC decreased peak BTE by 3%, when compared with diesel operation on CE. Low calorific value and high viscosity of biodiesel might have showed comparable performance with biodiesel operation in comparison with neat diesel. CE with biodiesel operation increased BTE at all loads with advanced injection timing, when compared with CE with diesel operation at 27° bTDC. Initiation of combustion at early period and increase of contact period of fuel with air improved performance with biodiesel when compared with diesel operation at 27° bTDC. CE with biodiesel operation increased peak BTE by 3% at an optimum injection timing of 31° bTDC, when compared with diesel operation at 27° bTDC. LHR combustion chamber with biodiesel at various injection timings. This curve followed similar trends with Fig.3. From Fig.4, it is observed that at 27° bTDC, engine with LHR combustion chamber with biodiesel showed the improved performance when compared with diesel operation on CE. High cylinder temperatures helped in improved evaporation and faster combustion of the fuel injected into the combustion chamber. Reduction of ignition delay of the biodiesel in the hot environment of the engine with LHR combustion chamber might have improved heat release rates. Engine with LHR combustion chamber with biodiesel operation increased peak BTE by 14% at an optimum injection timing of 28° bTDC in comparison with mineral diesel operation on CE at 27° bTDC. Hot combustion chamber of LHR engine reduced ignition delay and combustion duration and hence the optimum injection timing (28° bTDC) was obtained earlier with engine with LHR combustion chamber when compared with CE (31° bTDC) with biodiesel operation. [25]. From Fig.3, it is observed that engine with LHR combustion chamber with biodiesel operation increased peak BTE by 3% at 27° bTDC and 10% at 31° bTDC in comparison with CE with biodiesel operation at 27° bTDC and at 31° bTDC. Improved evaporation of biodiesel in hot environment provided by the engine with LHR combustion chamber might have improved peak thermal efficiency of the engine. Engine with LHR combustion chamber with biodiesel operation showed higher peak BTE than diesel operation on same configuration of the engine. This showed that engine with LHR combustion chamber was more suitable for biodiesel.

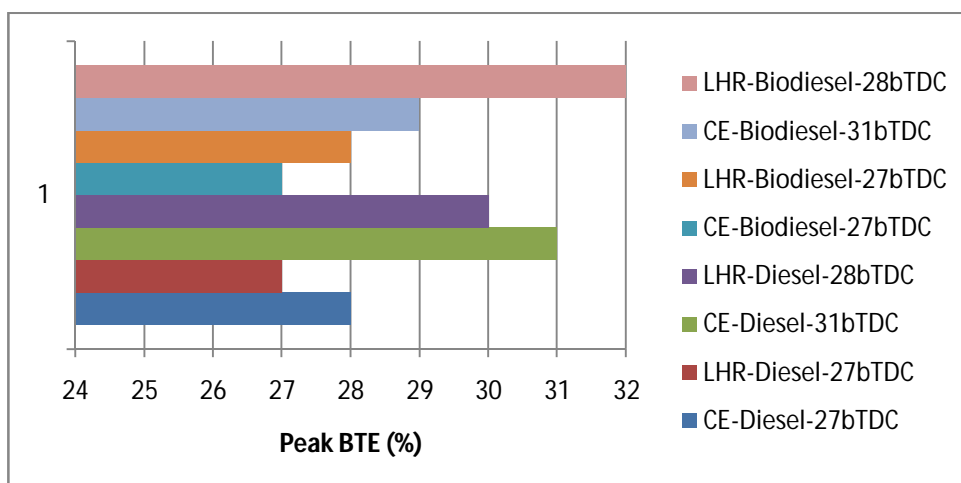


Fig.3 Bar charts showing the variation of peak brake thermal efficiency (BTE) with test fuels with conventional engine (CE) and engine with LHR combustion chamber at recommended and optimized injection timings at an injector opening pressure of 190 bar.

Fig.4 presents bar charts showing the variation of brake specific energy consumption (BSEC) at full load with test fuels. From Fig.4, it is shown that BSEC at full load decreased with advanced injection timing with test fuels. This was

because of increase of resident time of fuel with air thus improving atomization and thus combustion. BSEC was comparable with biodiesel with CE at 27° bTDC and 31°bTDC, when compared with CE with diesel operation at 27° bTDC and at 31°bTDC. Improved combustion with higher cetane number and presence of oxygen in fuel composition with higher heat release rate with biodiesel may lead to produce comparable BSEC at full load. Engine with LHR combustion chamber with biodiesel decreased BSEC at full load operation by 6% at 27° bTDC and 3% at 28° bTDC, when compared diesel operation with engine with LHR combustion chamber at 27° bTDC and at 28° bTDC.

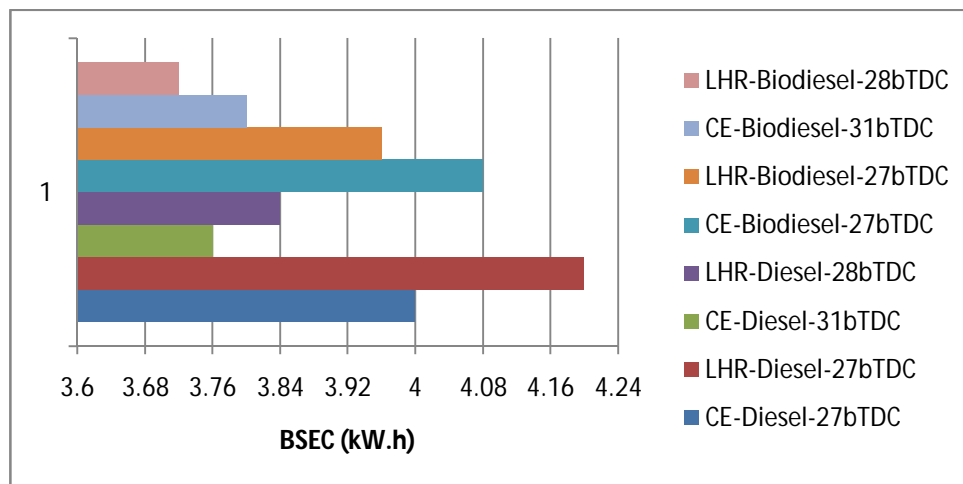


Fig.4.Bar charts showing the variation of brake specific energy consumption (BSEC) at full load operation with test fuels with both versions of the engine at recommended and optimized injection timings at an injector opening pressure of 190 bar.

This once again confirmed that engine with LHR combustion chamber was more suitable for biodiesel operation than neat diesel operation. Engine with LHR combustion chamber with biodiesel decreased BSEC at full load operation by 3% at 27°bTDC and 2% at 28° bTDC, in comparison with CE at 27° bTDC and at 31° bTDC with biodiesel. Improved evaporation rate and higher heat release rate of fuel with LHR combustion chamber might have improved the performance with LHR engine.

Fig.5 presents bar charts showing variation of exhaust gas temperature (EGT) at full load with test fuels. From Fig.5, it is noticed that, exhaust gas temperature (EGT) at full load operation decreased with advanced injection timing with test fuels. This was because, when the injection timing was advanced, the work transfer from the piston to the gases in the cylinder at the end of the compression stroke was too large, leading to reduce EGT. CE with biodiesel operation increased EGT at full load operation by 6% at 27°bTDC and 7% at 31°bTDC in comparison with CE with neat diesel operation at 27°bTDC and at 31°bTDC. Though calorific value (or heat of combustion) of biodiesel is lower than that of diesel, density of biodiesel is higher, therefore greater amount of heat was released in the combustion chamber leading to produce higher EGT at full load operation with biodiesel operation than neat diesel operation. This was also because of higher duration of combustion of biodiesel causing retarded heat release rate. Similar findings were obtained by other researchers [6–8]. From Fig.7, it is noticed that engine with LHR combustion chamber with biodiesel operation increased EGT at full load operation by 5% at 27° bTDC and 5% at 28° bTDC, when compared with diesel operation on same configuration of the engine at 27° bTDC and at 28° bTDC.High duration of combustion due to high viscosity of biodiesel in comparison with diesel might have increased EGT at full load. Engine with LHR combustion chamber with biodiesel increased EGT at full load operation by 17% at 27°bTDC and 13% at 28° bTDC, in comparison with CE at 27°bTDC and at 31° bTDC.

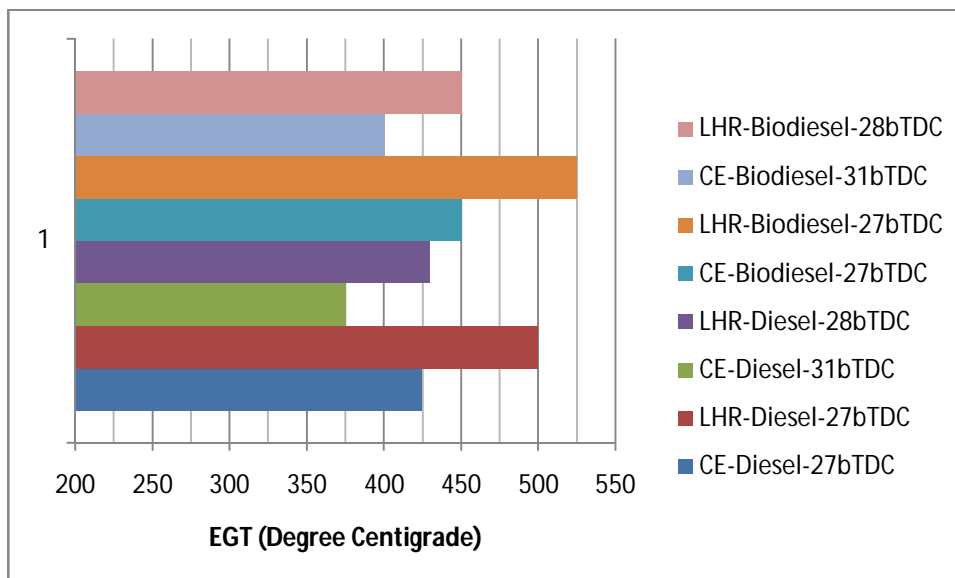


Fig.5 Bar charts showing the variation of exhaust gas temperature (EGT) at full load operation with test fuels with both versions of the engine at recommended and optimized injection timings at an injector opening pressure of 190 bar.

This indicated that heat rejection was restricted through the piston, liner and cylinder head, thus maintaining the hot combustion chamber as result of which EGT at full load operation increased with reduction of ignition delay. Similar observations were reported by previous researchers [21–22].

Table.3 shows performance parameters of peak BTE, BSEC at full load and EGT at full load. From Table 3, it is noticed that preheating of the biodiesel improved the performance in both versions of the combustion chamber when compared with the biodiesel at normal temperature. Preheating reduced the viscosity of the biodiesel, causing efficient combustion thus improving BTE. Similar observations were noticed by previous researchers. [15]. Peak BTE improved marginally with an increase of injector opening pressure in both versions of the combustion chamber with test fuels. As injector opening pressure increased, droplet diameter decreased influencing the atomization quality, and more dispersion of fuel particle, resulting in enhanced mixing with air, leads to improved oxygen-fuel mixing rate, as extensively reported in the literature [13–15].

Table.3

Comparative data on Peak Brake Thermal Efficiency, Brake Specific Energy Consumption and Exhaust Gas Temperature at full load

IT/ Combustion Chamber Version	Test fuel	Peak Brake Thermal Efficiency (%)		Brake Specific Energy consumption at full load operation (kW.h)		Exhaust Gas Temperature (°C) at full load operation	
		Injector opening pressure (bar)		Injector opening pressure (bar)		Injector opening pressure (bar)	
		190	270	190	270	190	270
27(CE)	DF	28	30	4.0	3.84	425	395
	BD	27	29	4.08	4.0	450	425
27(LHR)	DF	27	29	4.2	4.12	500	450
	BD	28	30	3.96	3.88	525	475
28(LHR)	DF	30	31.5	3.84	3.76	430	390
	BD	32	33	3.72	3.64	450	400
31(CE)	DF	31	31	3.76	3.84	375	325
	BD	29	30.5	3.80	3.72	400	350

From Table.3, it is observed that BSEC at full load operation decreased marginally with an increase of injector opening pressure. This was because of improved heat release rate with reduction of size of fuel particle. BSEC at full load operation decreased with preheating of biodiesel in both versions of the combustion chamber. Improved spray characteristics with the reduction of viscosity of biodiesel might have reduced BSEC at full load with test fuels. From Table.3, it is noticed that EGT at full load operation increased marginally with preheated biodiesel with CE, which indicates the increase of diffused combustion due to high rate of evaporation and improved mixing between methyl ester and air. Therefore, as the fuel temperature increased, the ignition delay decreased and the main combustion phase (that is, diffusion controlled combustion) increased, which in turn raised the temperature of exhaust gases. However, EGT at full load decreased marginally with engine with LHR combustion with preheated biodiesel due to improved combustion. EGT at full load reduced marginally with an increase of injector opening pressure in both versions of the combustion chamber as seen from Table.3. Improved combustion with improved oxygen–fuel ratios might have reduced EGT at full load with test fuels.

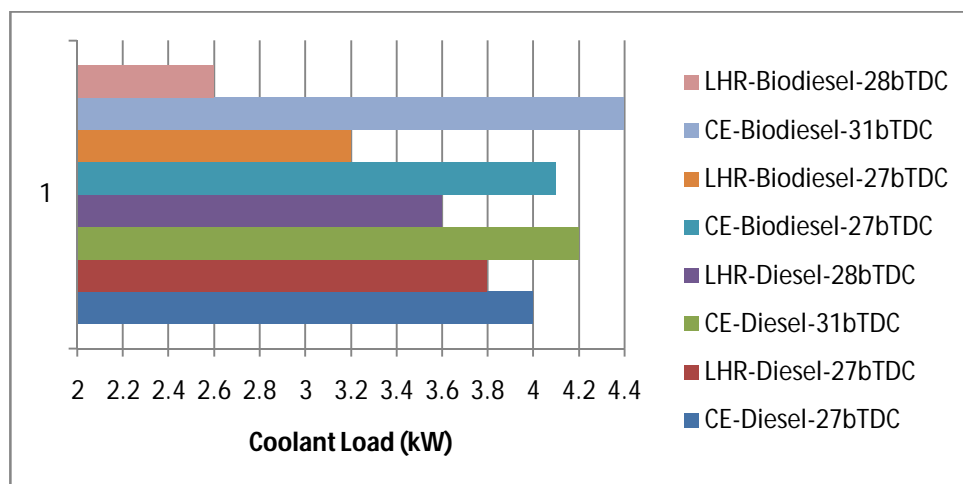


Fig.6 Bar charts showing the variation of coolant load at full load operation with test fuels with both versions of the engine at recommended and optimized injection timings at an injector opening pressure of 190 bar.

Fig.6 presents bar charts showing variation of coolant load with test fuels. CE with biodiesel increased coolant load by 3% at 27°bTDC and 10% at 31°bTDC when compared with neat diesel operation on CE at 27° bTDC and 31° bTDC as observed from Fig.6.

Increase of un–burnt fuel concentration at the combustion chamber walls may lead to increase of gas temperatures with biodiesel produced higher coolant load than diesel operation. Similar trends were reported in previous studies [21–22]. Coolant load at full load operation increased in CE, while decreasing the same in engine with LHR combustion chamber with advanced injection timing with biodiesel. In case of CE, un–burnt fuel concentration reduced with effective utilization of energy, released from the combustion, coolant load with test fuels increased marginally at full load operation, with an increase of gas temperatures, when the injection timing was advanced to the optimum value. The reduction of coolant load in engine with LHR combustion chamber might be due to the reduction of gas temperatures with improved combustion. Hence, the improvement in the performance of CE was due to heat addition at higher temperatures and rejection at lower temperatures, while the improvement in the efficiency of the engine with LHR combustion chamber was because of recovery from coolant load at their optimum injection timings with test fuels. Engine with LHR combustion chamber with biodiesel operation decreased coolant load operation by 16% at 27° bTDC and 28% at 28° bTDC, when compared diesel operation with same configuration of the engine at 27° bTDC and at 28° bTDC. More conversion of heat into useful work with biodiesel than diesel might have reduced coolant load with biodiesel. Fig.6 indicates that engine with LHR combustion chamber with biodiesel decreased coolant load at full load operation by 7% at 27°bTDC and 41% at 28° bTDC, in comparison with CE at 27°bTDC and at 31° bTDC. Provision of thermal insulation and improved combustion with engine with LHR combustion chamber might have reduced coolant load with LHR engine in comparison with CE with biodiesel operation. Similar observations were reported by previous researchers. [21–22].

Fig.7 shows bar charts showing variation of volumetric efficiency at full load with test fuels. It indicates that CE with biodiesel operation decreased volumetric efficiency at full load by 2% at 27°bTDC and comparable at 31°bTDC, when compared with diesel operation on CE at 27° bTDC and 31° bTDC. Increase of EGT might have reduced volumetric efficiency at full load, as volumetric efficiency depends on combustion wall temperature, which in turn depends on EGT. Volumetric efficiency at full load operation improved marginally with advanced injection timing with test fuels with both configurations of the combustion chamber.

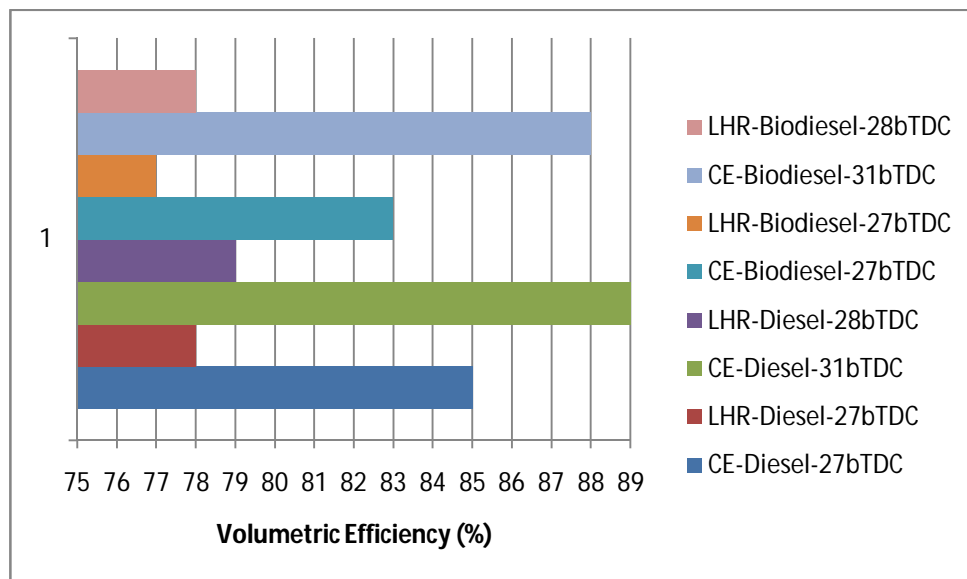


Fig.7 Bar charts showing the variation of volumetric efficiency at full load operation with test fuels with both versions of the engine at recommended and optimized injection timings at an injector opening pressure of 190 bar.

Reduction of EGT at full load might have improved volumetric efficiency with test fuels. From Fig.7, it is noticed that volumetric efficiencies at full load operation on engine with LHR combustion chamber at 27° bTDC and at 28° bTDC with biodiesel were marginally lower than diesel operation on same configuration of the engine at 27° bTDC and 28° bTDC. Increase of EGT was responsible factor for it. Fig.7 indicates that engine with LHR combustion chamber with biodiesel decreased volumetric efficiency at full load operation by 7% at 27°bTDC and 11% at 28° bTDC, in comparison with CE at 27°bTDC and at 31° bTDC. The reduction of volumetric efficiency with engine with LHR combustion chamber was because of increase of temperatures of insulated components of LHR combustion chamber, which heat the incoming charge to high temperatures and consequently the mass of air inducted in each cycle was lower. Similar observations were noticed by earlier researchers [21–22]. Table.4 shows coolant load and volumetric efficiency at full load. Coolant load at full load operation decreased with preheating of biodiesel, as noticed from Table.4. Improved spray characteristics might have reduced gas temperatures and hence coolant load. From Table.4, it is observed that that coolant load at full load operation marginally increased in CE, while decreasing it in engine with LHR combustion chamber with increased injector opening pressure with test fuels. This was due to the fact that increased injector opening pressure increased nominal fuel spray velocity resulting in improved fuel–air mixing with which gas temperatures increased in CE.

The reduction of coolant load in engine with LHR combustion chamber was due to improved fuel spray characteristics and increase of oxygen–fuel ratios causing decrease of gas temperatures and hence the coolant load. Volumetric efficiency at full load operation marginally reduced in CE, while increasing it in engine with LHR combustion chamber with preheated biodiesel as observed from Table.4.

This was because of increase of EGT in CE, while decreasing of the same in engine with LHR combustion chamber. Volumetric efficiency at full load operation was marginally increased with an increase of injector opening pressure in both versions of the combustion chamber with test fuels. Improved oxygen–fuel ratios might have reduced EGT with test fuels. However, these variations were very small.

Table.4
Comparative data on Coolant Load & Volumetric Efficiency at full load operation

IT/ Combustion Chamber Version	Test fuel	Coolant Load (kW)		Volumetric Efficiency (%)	
		Injector opening pressure (bar)		Injector opening pressure (bar)	
		190	270	190	270
27(CE)	DF	4.0	4.4	85	87
	BD	4.1	4.5	83	85
27(LHR)	DF	3.8	3.4	78	80
	BD	3.2	2.8	77	79
28(LHR)	DF	3.6	3.0	79	81
	BD	2.6	2.2	78	80
31(CE)	DF	4.0	4.4	85	87
	BD	4.1	4.5	83	85

Exhaust Emissions

Particulate emissions and nitrogen oxide levels are exhaust emissions from diesel engine. Once they are inhaled, they cause severe health hazards and environmental effects [26–28]. Fig.8 presents bar charts showing variation of particulate emissions at full load with test fuels. From Fig.8, it is noticed that CE with biodiesel operation decreased particulate emissions at full load by 6% at 27° bTDC and 17% at 31° bTDC, when compared with neat diesel operation on CE at 27° bTDC and at 31° bTDC. Earlier studies have suggested the presence of fuel oxygen. From Fig.8, it is noticed that particulate emissions decreased with advanced injection timings, in both versions of the combustion chamber, with different operating conditions of the biodiesel. Increase of air entrainment might have caused lower particulate emissions with advanced injection timings.

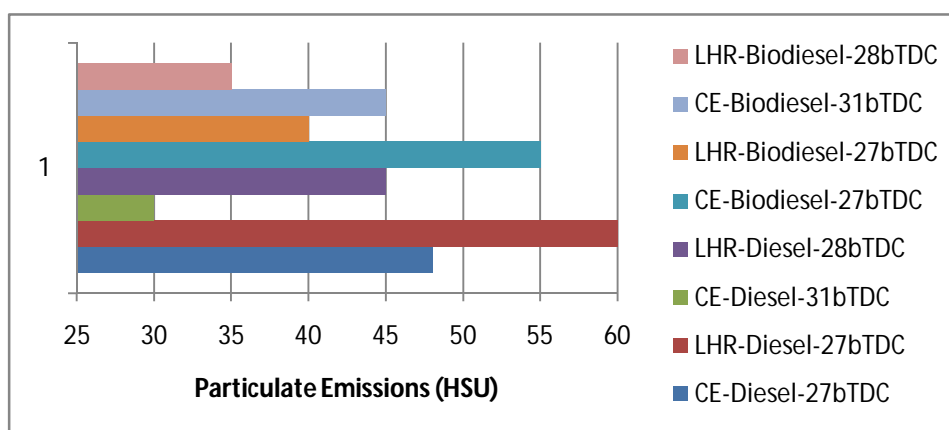


Fig.8. Bar charts showing the variation of particulate emissions at full load operation with test fuels with conventional engine (CE) and engine with LHR combustion chamber at recommended and optimized injection timings at an injector opening pressure of 190 bar.

From Fig.8, it is observed that engine with LHR combustion chamber with biodiesel operation decreased particulate emissions at full load by 33% at 27° bTDC and 55% at 28° bTDC, when compared diesel operation on engine with LHR combustion chamber at 27° bTDC and at 28° bTDC. Improved combustion of higher cetane value biodiesel in the hot environment provided by engine with LHR combustion chamber might have reduced particulate emissions with test fuels. Fig.8 indicates that engine with LHR combustion chamber with biodiesel decreased particulate emissions at full load operation by 11% at 27° bTDC and 20% at 28° bTDC, in comparison with CE at 27° bTDC and at 31° bTDC. Improved combustion of biodiesel with improved oxygen– fuel ratios might have reduced particulate emissions in the LHR version of the combustion chamber.

The temperature and availability of oxygen are the reasons for the formation of NO_x levels. Fig.9, it is observed that with Biodiesel operation increased NO_x levels with both versions of the engine, in comparison with neat diesel operation on CE. The increase in NO_x emission might be an inherent characteristic of biodiesel due to the presence of long chain mono-unsaturated fatty acids (MUFA) and of poly-unsaturated fatty acids (PUFA). [26-27]. Presence of oxygen (10%) in the methyl ester, which leads to improvement in oxidation of the nitrogen available during combustion. [29-30]. This will raise the combustion bulk temperature responsible for thermal NO_x formation. The production of higher NO_x with biodiesel fueling is also attributable to an inadvertent advance of fuel injection timing due to its higher bulk modulus (1564 MPa) of compressibility, with the in-line fuel injection system. Similar observations were made by earlier researchers. [5]. From Fig.9, it was observed that advanced injection timing increased NO_x levels in CE, while decreasing them in engine with LHR combustion chamber with test fuels. Increase of combustion temperatures and resident time lead to produce more NO_x concentration in the exhaust of CE, while reduction of gas temperatures with improved air-fuel ratios decreased NO_x levels in engine with engine with LHR combustion chamber with advanced injection timing. From Fig.9, it is observed that CE with biodiesel operation increased NO_x levels at full load by 6% at 27°bTDC and 5% at 31°bTDC, when compared with diesel operation on CE at 27°bTDC and at 31°bTDC.

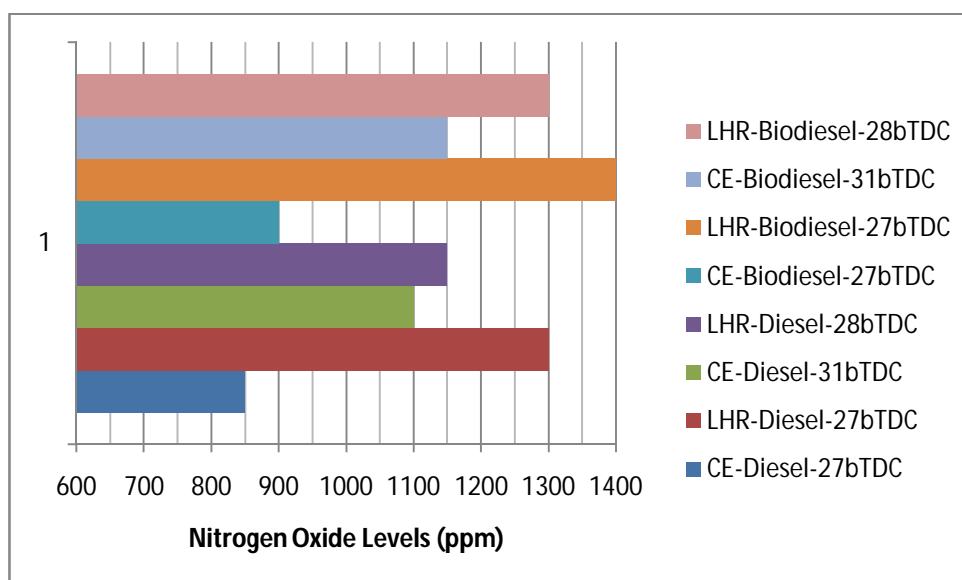


Fig.9 Bar charts showing the variation of nitrogen oxide (NO_x) levels at full load operation with test fuels with conventional engine (CE) and engine with LHR combustion chamber at recommended and optimized injection timings at an injector opening pressure of 190 bar.

From Fig.9, it is observed that NO_x levels at full load operation on engine with LHR combustion chamber with biodiesel increased by 8% at 27° bTDC and 9% at 28° bTDC, when compared diesel operation on engine with LHR combustion chamber at 27° bTDC and at 28° bTDC. Higher cetane value of biodiesel might have improved NO_x levels with biodiesel operation. Engine with LHR combustion chamber with biodiesel increased NO_x levels at full load operation by 44% at 27°bTDC and 9% at 28° bTDC, in comparison with CE at 27°bTDC and at 31° bTDC. Increase of combustion temperatures with the faster combustion and improved heat release rates caused higher NO_x levels in the engine with LHR combustion chamber in comparison with CE with biodiesel operation.

Table.5 shows exhaust emissions at full load with test fuels. From Table.5, it is noticed that particulate emissions at full load reduced with an increase of injector opening pressure in both versions of the combustion chamber, with different operating conditions of the biodiesel. Higher fuel injection pressures improved fuel-air mixing followed by faster combustion which directly influences pollutant formation leading to reduce particulate emissions. At higher injector opening pressure, particulate emissions in the exhaust reduced due to relatively superior fuel-air mixing. An increase in fuel injection pressure induces improvement in spray atomization, combustion and particulate emissions. From Table.5, it is noted that NO_x levels increased in CE, while decreasing them in engine with LHR combustion chamber with

different operating conditions of biodiesel with an increase of injector opening pressure. Enhanced spray characteristics, thus improving fuel air mixture preparation and evaporation process in CE might have increased gas temperatures with CE, which increased NO_x levels.

Table5
Comparative data on Particulate Emissions &NO_x Levels at full load operation

IT/ Combustion Chamber Version	Test fuel	Particulate emissions (Hartridge Smoke Unit)		NO _x levels (ppm)	
		Injection Pressure (bar)		Injection Pressure (bar)	
		190	270	190	270
27(CE)	DF	48	34	850	950
	BD	45	35	900	1000
27(LHR)	DF	60	50	1300	1100
	BD	40	30	1400	1300
28(LHR)	DF	45	35	1150	1050
	BD	20	10	1300	1200
31(CE)	DF	30	35	1100	1200
	BD	25	35	1150	1250

Improved combustion with improved oxygen–fuel ratios in engine with LHR combustion chamber reduced particulate emissions. From Table.5, it is noticed that NO_x levels reduced with preheating of the biodiesel. The change of the properties of viscosity and surface tension of fuel with preheating may lead to different relative duration of premixed and diffusive combustion regimes, which have different emission formation characteristics. As fuel temperature was increased, there was an improvement in the ignition quality, which will cause shortening of ignition delay. A short ignition delay period lowers the peak combustion temperature which suppresses NO_x formation.

SUMMARY

1. Engine with LHR combustion chamber is efficient for alternative fuel like biodiesel rather than neat diesel.
2. Engine with LHR combustion chamber with biodiesel improved its performance and reduced particulate emissions over CE at recommended injection timing and optimized timing.
3. LHR engine with biodiesel drastically increased nitrogen oxide levels in comparison with neat diesel operation on conventional engine.
4. The performance of the engine improved with advanced injection timing, increase of injector opening pressure and with both versions of the combustion chamber with biodiesel.

4.2 Novelty

Engine parameters (injection timing and injection pressure) and different configurations of the engine (conventional engine and engine with LHR combustion chamber) were used simultaneously to improve performance and exhaust emissions of the engine. Change of injection timing was accomplished by inserting copper shims between pump frame and engine body.

Highlights

1. Fuel injection pressure & timings affect engine performance.
2. Performance and exhaust emissions improved with change of injector opening pressure
3. Change of combustion chamber design improved the performance of the engine

Future Scope of Work

Engine with LHR combustion chamber gave higher NO_x levels, which can be controlled by means of the selective catalytic reduction (SCR) technique using lanthanum ion exchanged zeolite (catalyst-A) and urea infused lanthanum

International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 3, March 2016

ion exchanged zeolite (catalyst-B) with different versions of combustion chamber at full load operation of the engine [31]. Preheating of biodiesel can be taken up.

ACKNOWLEDGMENTS

Authors thank authorities of Chaitanya Bharathi Institute of Technology, Hyderabad for providing facilities for carrying out this research work. Financial assistance provided by All India Council for Technical Education (AICTE), New Delhi is greatly acknowledged.

REFERENCES

1. S.K. Acharya, R.K. Swain and M.K. Mohanti, The use of rice bran oil as a fuel for a small horse-power diesel engine. *Energy Sources, Part A: Recovery, Utilization, and Environmental Effects*, vol.33, no.1, pp 80-88, 2009.
2. B.K. Venkanna, C. Venkataramana Reddy, B. Swati and Wadawadagi, Performance, emission and combustion characteristics of direct injection diesel engine running on rice bran oil / diesel fuel blend. *International Journal of Chemical and Biological Engineering*, vol.2, no.3, pp131-137, 2009.
3. R.D. Misra and M.S. Murthy, Straight vegetable oils usage in a compression ignition engine—A review. *Renewable and Sustainable Energy Reviews*, vol. 14, pp 3005–3013, 2010.
4. No. Soo-Young, Inedible vegetable oils and their derivatives for alternative diesel fuels in CI engines: A review. *Renew Sustain Energy Rev*, vol.15, pp131–149, 2011.
5. Avinash Kumar Agarwal and AtulDhar, Experimental investigations of performance, emission and combustion characteristics of Karanja oil blends fuelled DICI engine, *Renewable Energy*, vol. 52, pp283–291, 2013.
6. C.D. Rakopoulos, D.C. Rakopoulos, D.T. Hountalaset al., Performance and emissions of bus engine using blends of diesel fuel with biodiesel of sunflower or cottonseed oils derived from Greek feedstock, *Fuel*, vol.87: pp147–157, 2008.
7. P.M. McCarthy, M.G. Rasul and S. Moazzem, Analysis and comparison of performance and emissions of an internal combustion engine fuelled with petroleum diesel and different biodiesels, *Fuel*, vol. 90, pp2147–2157, 2011.
8. AnirudhGautam and Avinash Kumar Agarwal, Experimental investigations of comparative performance, emission and combustion characteristics of acottonseed biodiesel fuelled four–stroke locomotive diesel engine, *Int J Engine Res*, vol. 14, pp354-370, 2013.
9. MaddaliKrishna and R. Chowdary, Comparative studies on performance evaluation of waste fried vegetable oil in crude form and biodiesel form in conventional diesel engine, *SAE Paper 2014-01-1947*, 2014.
10. N. DurgaPrasadaRao, M.V.S. Murali Krishna, B. Anjeneya Prasad and P.V.K. Murthy. Effect of injector opening pressure and injection timing on exhaust emissions and combustion characteristics of rice bran oil in crude form and biodiesel form in direct injection diesel engine. *IOSR Journal of Engineering*, vol.4,no.2, pp 9-19, 2014.
11. M. Pugazhvidivuan and K. Jayachandran, Investigations on the performance and exhaust emissions of a diesel engine using preheated waste frying oil as fuel, *Renew energy*, vol. 30, no.14, pp2189-2202, 2005.
12. D. Agarwal and A.K. Agarwal, Performance and emissions characteristics of jatropha oil preheated and blends in a direct injection compression ignition engine, *Appl. Therm. Eng.*, vol. 27, no.13, pp2314–2323, 2007.
13. HanbeyHazar and HuseyinAydin, Performance and emission evaluation of a CI engine fueled with preheated raw rapeseed oil (RRO)-diesel blends, *Applied Energy*, vol. 87, pp786–790, 2007.
14. I. Celikten, An experimental investigation of the effect of the injection pressure on engine performance and exhaust emission in indirect injection diesel engines, *ApplThermEng*, vol. 23, pp2051–60, 2003.
15. Avinash Kumar Agarwal, Dhananjay Kumar Srivastava, AtulDhar, et al., Effect of fuel injection timing and pressure on combustion, emissions and performance characteristics of a single cylinder diesel engine, *Fuel* vol. 111, pp374–83, 2013.
16. P.V.Krishna Murthy, Studies on biodiesel with low heat rejection diesel engine. PhD Thesis, J. N. T. University, Hyderabad, 2010.
17. T. Ratna Reddy, M.V.S. Murali Krishna, Ch. Kesava Reddy and P.V.K. Murthy, Performance evaluation of a low heat rejection diesel engine with mohr oil based biodiesel, *British Journal of Applied Science & Technology*, vol. 2, no.2, pp 179-198, 2012.
18. N. Janardhan, P. Ushasri, M.V.S.Murali Krishna and P.V.K. Murthy, Performance of biodiesel in low heat rejection diesel engine with catalytic converter. *International Journal of Engineering and Advanced Technology*, vol. 2, no.2, pp97-109, 2012.
19. N. VenkateswaraRao, M.V.S. Murali Krishna and P.V.K. Murthy, Effect of injector opening pressure and injection timing on exhaust emissions and combustion characteristics of high grade low heat rejection diesel engine with tobacco seed oil based biodiesel, *Int J Recent TechnolEng* 13; vol.2, no.4, pp70–79, 2013.
20. N. VenkateswaraRao M.V.S. Murali Krishna and P.V.K. Murthy, Effect of injector opening pressure and injection timing on performance parameters of high grade low heat rejection diesel engine with tobacco seed oil based biodiesel, *Int J Current Eng& Tech*, vol.3, no.4, pp1401–1411, 2013.
21. M.V.S. Murali Krishna, N. DurgaPrasadaRao, B. Anjeneya Prasad, Comparative studies on exhaust emissions and combustion characteristics of direct injection diesel engine with different combustion chamber with rice bran oil based biodiesel, *Int J Eng Innovative Technol*, vol.3, no.6, pp163–173, 2013.
22. B. SubbaRao, E. Ramjee, P.V.K. Murthy and M.V.S.Murali Krishna, Studies on exhaust emissions and combustion characteristics of tobacco seed oil in crude form and biodiesel from a high grade low heat rejection diesel engine, *International Journal of Industrial Engineering and Technology*, vol.3, no.1, pp27-36, 2013.
23. M.V.S. Murali Krishna, N. Janardhan, Ch. Kesava Reddy, and P.V. Krishna Murthy, Experimental investigations on DI diesel engine with different combustion chambers, *British Journal of Applied Science & Technology*, vol.6, no.3, pp239–260, 2014.
24. M.V.S. Murali Krishna, Performance evaluation of low heat rejection diesel engine with alternative fuels, PhD Thesis, J. N. T. University, Hyderabad, India, 2004.
25. D. Srikanth, M.V.S. Murali Krishna, & P. Usha Sri, Experimental investigations on performance parameters of high grade semi adiabatic diesel engine with cotton seed biodiesel, *International Journal of Mechanical Engineering Technology*, 7(1), 42-57, 2016.

International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 3, March 2016

26. M.H. Fulekar, Chemical pollution – a threat to human life, Indian Journal of Environmental Technology, 1, pp 353-359, 1999.
27. S.M. Khopkar, Environmental Pollution Analysis, [New Age International (P) Ltd, Publishers, New Delhi], pp 180-190, 2010.
28. B.K. Sharma, Engineering Chemistry, [PragathiPrakashan (P) Ltd, Meerut], pp 150-160, 2010.
29. J.B. Heywood, Internal Combustion Engine Fundamentals, McGraw-Hill Book Company, New Delhi, 2013.
30. P.V. Rao, Effect of properties of Karanja methyl ester on combustion and NO_x emissions of a diesel engine. JPetroleum Tech&Alternative Fuels, vol.2, no.5, pp63–75, 2011.
31. N. Janardhan, P. Usha Sri, M.V.S. Murali Krishna, Performance of biodiesel in low heat rejection diesel engine with catalytic converter, Int J Eng& Advanced Tech, vol2, no.2, pp97–109, 2012.