

**International Journal of Innovative Research in Science,  
Engineering and Technology***(An ISO 3297: 2007 Certified Organization)***Vol. 5, Issue 7, July 2016**

# **Sensing Capabilities and Mechanical Property Evaluation of Fiber Reinforced Polymer (FRP) Composites**

**K.R. Channakeshava<sup>1</sup>, T. Rangaswamy<sup>2</sup>**Lecturer, Dept. of Mechanical Engineering, Smt. L.V. Govt. Polytechnic, Hassan, KA, India<sup>1</sup>Professor, Dept. of Mechanical Engineering, GEC, Hassan, KA India<sup>2</sup>

**ABSTRACT:** Smart material is one of the upcoming fields in science and technology. The integration of sensing and actuation capabilities in the material to make it SMART is the challenging task. In this research work, an attempt has been made to develop a passive smart material by the integration of electrical inserts in Fiber Reinforced Polymer (FRP) components. Specimens are prepared as per ASTM standards. Mechanical strengths were tested for tensile, flexural, compression and impact. The obtained results have been compared using ABAQUS/CAE V6.12-1 solver. Experimental and Finite Element Analysis (FEA) results show that FRP smart materials possess good mechanical strength to weight ratio. These composites are successfully integrated with electrical inserts for tactile sensing capability and replacement of nylon plastic 66/6 quadra-copter arms.

**KEYWORDS:** Smart Material, Tactile Sensing, Fiber Reinforced Plastic

## **I. INTRODUCTION**

Fiber-reinforced plastic (FRP) is a composite material made of a polymer matrix reinforced with fibers. FRPs have high strength to weight ratio and also possess light, strong and high corrosion resistance properties. Smart materials possess sensing and actuation capabilities. Smart materials can be either active or passive. Active smart materials possess the capability to modify their geometric or material properties, while passive smart material consisting of only sensing capability. Gene et al. [1] have developed various ceramic formulations from their ferroelectric nature and specific areas of application. Neil et al. [2] have shown that, piezoelectric smart materials using shape memory alloys (SHA) and piezoelectric smart materials can be used for force measurements. Schlicker et al. [3] have used the inductive and capacitive sensor capabilities and arrays are used for imaging of buried objects. Staneley Kon et al. [4] have shown both piezoresistive and piezoelectric materials are commonly used to detect strain caused by structural vibrations in macro-scale structures. Yanlei et al. [5] have used OFBG sensors for measuring strain & temperature. Haibao Lu et al. [6] have investigated sensing and actuating capabilities of SHA polymer composite integrated with hybrid filler. In this paper, a novel tactile sensing mechanism in FRP composite material will be described along with the fabrication process and representative application.

## **II. SPECIMEN PREPARATION**

Open mold hand layup method is used for the fabrication of the specimens. Molds are prepared to cast specimens for mechanical testing as per ASTM standard 256 and 638. Glass wool has been used as the reinforcement material and Epoxy (LY 556) resin as matrix material. The copper metal strips are inserted in between the layer to obtain the capacitive tactile sensing. Natural curing process has been used for curing the prepared specimens. The systematic integration of thin copper strip in FRP material not only increases the mechanical properties, but also gives sensing capabilities to the structure. The epoxy and glass fiber layer act as a dielectric media and by varying the thickness of the

# International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)


Vol. 5, Issue 7, July 2016

glass wool/epoxy layer, capacitance can be controlled. Table 1 shows the different proportions of electrical inserts fabricated for mechanical testing of specimens.


*Table 1: Various Compositions with Electrical Inserts.*

Specimens	Compositions					
	Epoxy		Glass fiber		Copper thin sheet	
Compression	25gm	94.80%	0.97gm	3.67%	0.40gm	1.51%
Flexural	60gm	96.71%	1.40gm	2.25%	0.64gm	1.03%
Izode Impact	40gm	96.17%	0.95gm	2.28%	0.64gm	1.53%
Tensile	50gm	95.02%	1.73gm	3.28%	0.89gm	1.69%

## III. TACTILE SENSING OF FRP SMART MATERIAL

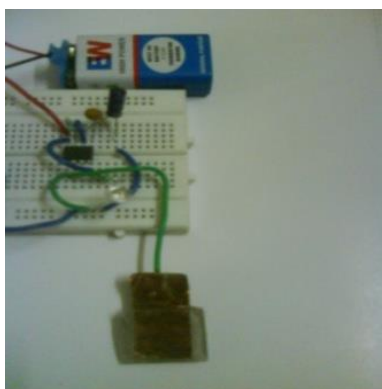

(a) Before Touch

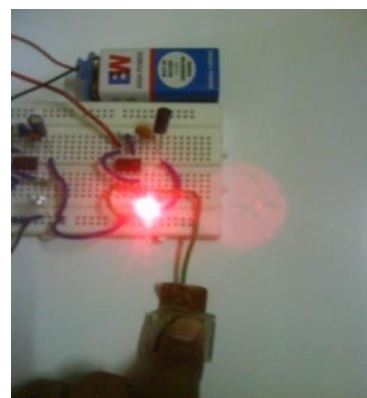

(b) After Touch

*Fig. 1 Specimen with Electrical Insert Working as Capacitive Touch Sensor*

Prepared specimens have been tested to verify the sensing capability of the material. The inserts in the specimens are arranged in a suitable pattern to achieve mechanical strength as well as tactile sensing. Figure 1 shows one of the arrangements to check the touch sensing capabilities of the materials. FRP material is connected with the electronics circuit that will process and display the sensed information. Electronic circuit contains microcontroller that will check the sensory circuit in every scanning cycle and display the output according to the touch input.

# International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 7, July 2016

## Mechanical Strengths Characterization




**Fig. 2 Flat Specimens with Electrical Inserts before Testing**



**Fig. 3 Flat Specimens with Electrical Inserts after Testing**

The specimens have been prepared as per ASTM standards for flexural, compression, Impact and Tensile tests are shown in Fig 2. The specimens are tested as per ASTM 638 & 256 test standards with fibers and electrical inserts parallel and perpendicular to the loading directions as shown in Fig 3. Finite element analysis is analyzed for compression, flexural, Izod-impact and tensile failure using ABAQUS/CAE 6.12-1 solver shown in Fig 4.

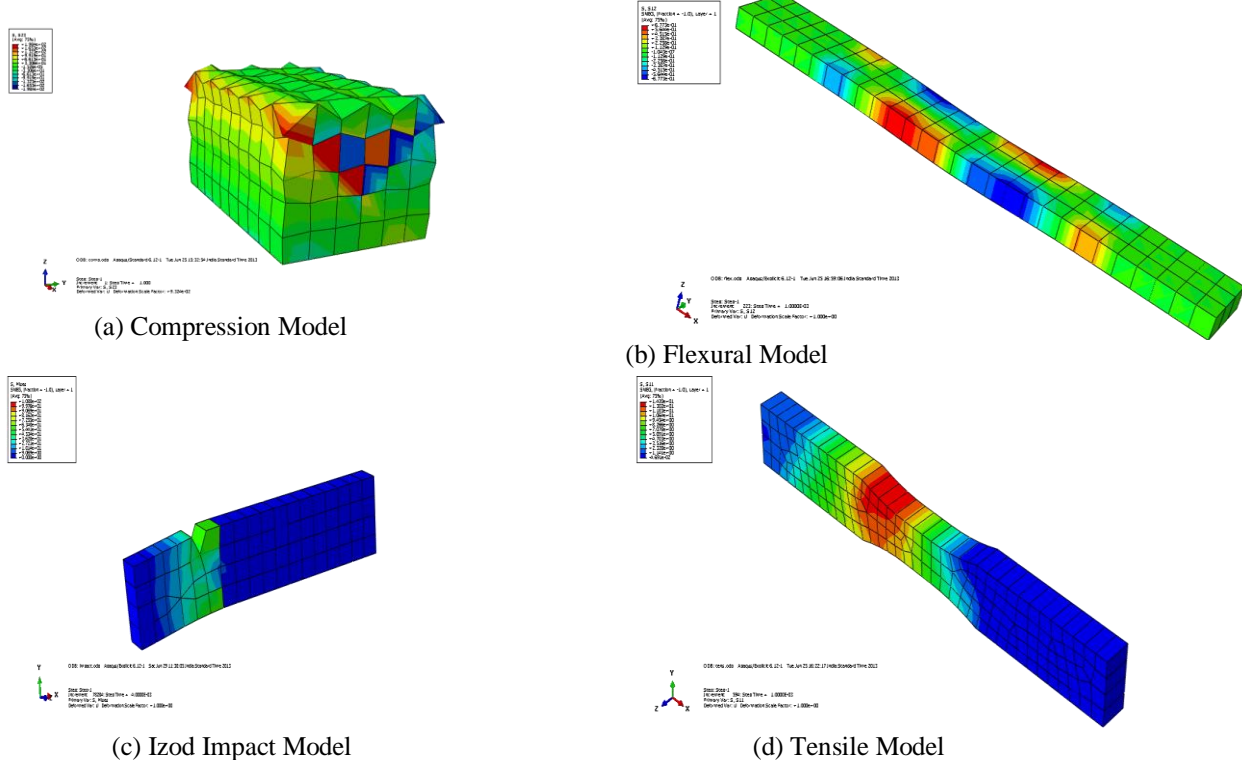


**Fig. 4: Compression, Flexural, Izod- Impact and Tensile Failure Models**

Results of experimental and FEA have compared to verify the mechanical strengths of the specimens [Fig 5]. The results show small deviations because of the fabrication method employed. The specimen quality in hand layup method is mainly depends on the skill and expertise of the worker.

# International Journal of Innovative Research in Science, Engineering and Technology

(An ISO 3297: 2007 Certified Organization)

Vol. 5, Issue 7, July 2016

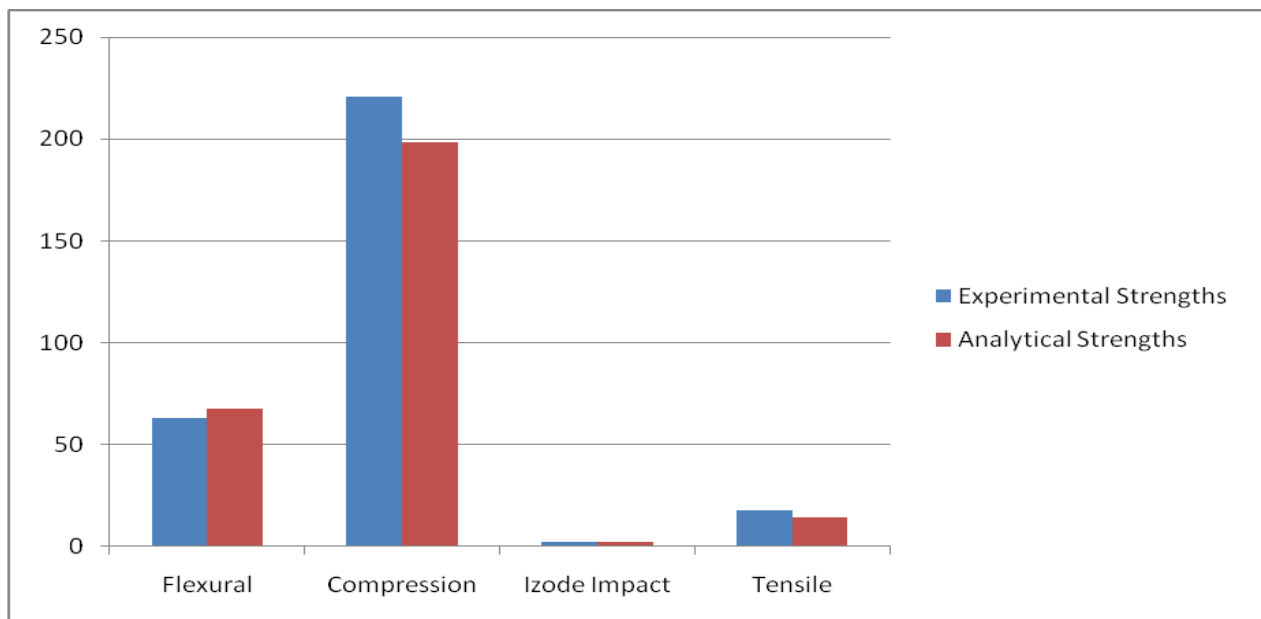

**Fig. 5 : Comparisons of Experimental and Analytical Strengths**

FRP materials integrated with metal inserts are used for developing Quadra-copter arms. Developed quadra-copter arms have many features compared to nylon plastic 66/6 arm. The proposed composite quadra-copter arm will have light weight, inbuilt sensing capability and good electrical signals transmission capacity. Figs 6 & 7 shows the Quadra-copter arms made of nylon plastic 66/6 and FRP with metal inserts.



**Fig. 6: Nylon Plastic 66/6 Quadra-Copter with Arms**



**Fig. 7 Smart Material Quadra-Copter with Arms**

## IV. CONCLUSION

Following conclusions are drawn from the experimental investigations

- Fiber Reinforced Plastic composites are successfully integrated with electrical inserts by hand-lay- up technique for tactile sensing.
- Experimental and FEA results show that FRP smart materials possess good mechanical Strength to weight ratio.

# **International Journal of Innovative Research in Science, Engineering and Technology**

*(An ISO 3297: 2007 Certified Organization)*

**Vol. 5, Issue 7, July 2016**

- The nylon plastic 66/6 quadra-copter arms can be successfully replaced by FRP smart material.

## **REFERENCES**

- [1] Gene H. Haertling, "Ferroelectric Ceramics: History and Technology"- J. Am. Ceram. Soc, 82[4] 797-818, 1999.
- [2] Neil Goldfine, "High-Resolution Inductive Sensor Arrays for UXO Detection, Identification, and Clutter Suppression"- SPIE Aero Sense. Vol. - 5089. 01-12, 2003.
- [3] D. Schlicker1, "Inductive and Capacitive Array Imaging Of Buried Objects"- 16th World Conference on Nondestructive Testing Montreal, Canada; August 30- September 3, 2004.
- [4] Stanley Kon, KennOldham and Roberto Horowitz "Piezoresistive and Piezoelectric MEMS Strain Sensors for Vibration Detection"- Sensors and Smart Structures Technologies for Civil, Mechanical and Aerospace Systems, SPIE Vol. – 6529, 2007.
- [5] Yanlei Wang, Zhi ZhOU, Jinping Oab, "Study on Fabrication of Smart FRP-OFBG Composite Laminates and Their Sensing Properties"- Proc. of SPIE Vol. 6595 65952W-1, 2007.
- [6] Devinder Sharma et al, "Non Destructive Testing (NDT) of materials using capacitive sensing technique"- MIT International Journal of Electronics and Communication Engineering Vol. 1 No. 2 Agu. 2011 pp 73-77.