

# International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: [www.ijirset.com](http://www.ijirset.com)

Vol. 9, Issue 2, February 2020

## Enhancement of Double Sloped and Four Side Glass Covered Solar Still Using Nano Particles

J. Ibrahima Shifana<sup>1</sup>, C. James Maria Rose<sup>1</sup>, S.Preetha<sup>1</sup>, R. Samuel Hansen<sup>2</sup>

Final year students, Department of Mechanical Engineering, Francis Xavier Engineering College, Tirunelveli,  
Tamil Nadu, India<sup>1</sup>

Professor, Department of Mechanical Engineering, Francis Xavier Engineering College, Tirunelveli,  
Tamil Nadu, India<sup>2</sup>

**ABSTRACT:** Energy and water are the two major issues faced by human beings nowadays. Owing to increase in the energy costs and the adverse effect on the environment caused by the burning of fossil fuels, renewable energy sources are being used worldwide to contribute in meeting the energy demand. Harnessing the abundance of solar power has been one among the foremost attractive energy alternatives. The development of an efficient and economical solar power storage system is of major concern. As per the estimates of the world health organization (WHO) by 2025, about half of the worlds population shall inhabit water stressed areas. for this water purification through solar energy is a clean and lucrative option to ensure access to clean and safe drinking water. In most of the solar energy driven desalination system, evaporation of water is one of the key processes. In this direction, we propose that addition of nano particles into the water (owing to their enhanced thermo-physical properties and optical tunability) could significantly enhance the evaporation rate and thus the pure water yield. In the present work, we have developed a detailed theoretically model to predict and qualify the evaporation rates when water / nano particles dispersion directly interact with solar irradiance. In order to clearly gauge the effects of adding nanoparticles, two system have been studied(i.e, the one is without nano particles and another is with nano particles dispersed in water under similar operating conditions.

### I. INTRODUCTION

Energy is an essential factor for the social and economic development of the societies. Renewable energy is accepted as a key source for the longer term on this earth. The combined effects of the deflection of fossil fuels and the gradually emerging consciousness about environmental degradation have given the first priority to the use of renewable alternative energy resources in the 21<sup>st</sup> century. All of renewable, solar thermal energy is considered to be practically unlimited in the long term and is a very abundant resource in the world. Many conventional and non-unconventional techniques have been developed for purification of saline water. Among these water purification systems, solar distillation proves to be economical and eco-friendly technique. Among the non-conventional methods to disinfect the polluted water, the foremost prominent method is solar distillation. The solar distillation method is more attractive than other methods. This method require simple technology as no skilled workers needed, low maintenance and it can be used anywhere without problems. There are two differing types of solar systems; those are active type and passive type. In active type system extra thermal energy is supplied to the basin through an external mode to extend the evaporation rate and productivity of pure water. Passive solar systems give lower yield when comparing with active solar systems. In the present days, most of the solar stills are passive solar stills. Because, they need only sunshine to operate it, and there are no moving parts to wear and power consuming. In a passive solar still, the radiation is received directly by the basin or solar still water and is merely source of energy for raising the water temperature, so the evaporation resulting in a lower productivity of pure water. The passive solar still of a conventional design is basically a sealed enclosure containing a shallow body of uniform temperature brine solution. This brine solution is heated by absorption of radiation admitted through the top transparent condensing glass cover. The convective circulation of humid air induces

# International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: [www.ijirset.com](http://www.ijirset.com)

Vol. 9, Issue 2, February 2020

the temperature difference between the brine solution and the top condensing glass cover. This causes the transport of water vapour from the brine surface to the top transparent glass cover and from it condenses into the distillate chamber. The parameters which are affecting the solar still are; water depth within the basin, material of the basin, wind velocity, solar radiation, inclination angle of glass cover and ambient temperature. The yield of water from the solar still is depend upon the temperature difference between the water within the solar still or basin and glass cover inner side temperature. The yield from solar still is directly proportional to the temperature difference of water in solar still and in side of the glass cover. Thermal processes for the distillation of sea water are known to be among the first technologies adapted to solar energy. The idea of saline water evaporation by using solar thermal energy for getting pure water is the best technique. It is very fortunate that in times of high water demand, solar radiation is also intense. It is beneficial to exploit solar energy directly by installing solar stills because they are clean and friendly to the environment. Numerous studies on solar stills of various designs to increase the productivity of potable water and efficiency of solar still have been carried out theoretically and experimentally. And direct volumetric absorption by the nanoparticle dispersion could actually enhance the evaporation rate. Recently, few researchers have shown that addition of nano particles to the base fluid could actually enhance the evaporation rate.

## II. OBJECTIVES

The main objective of our project is to enhance the distillate productivity of the double slope solar still with the assistance of solar thermal energy storing systems. solar power is an abundant and safe source of vitality and thus is distinguished together of the foremost promising energy choices. Nevertheless, solar power is intermittent in nature as there's not sun in the dark. Its total availability value is seasonal and is hooked on the environmental condition of locations. Hence, solar power presents an unsteady energy resource. So, thermal energy storage are going to be necessary to save lots of the available solar power at a period of no load or when excessive solar power is out there and to form up for the shortage of energy when the load is in need of energy. The distillate output of a solar still is low i.e., 0.76-1.5litres/day, hence it's not utilized in the economic and domestic applications and it's used during the sunshine hours. Hence, for the effective use of solar still, the distillate output must be increased. Hence, thermal energy evaporating state is increased by using Nano Particles . By using the Nano Particles having high thermal conductivity, the productivity are going to be resulted in and improved form at great extent.

## III. EXPERIMENTAL SETUP

The experimental setup is shown below in Fig. 1 during which solar still is formed from cast iron sheet metal of required size. The highest of the basin is roofed with transparent 5 mm four side glass for condensation purpose which will provide productivity in four sides. The size of the setup is shown on the Fig. 1. the entire setup is insulated by using thermocol of thermal conductivity 0.047 W/m K to attenuate heat losses. The setup is painted with black color so it'll be better to soak up the utmost amount of radiation falling on them and convert it in to the warmth. Radiation intensity and Ambient temperature are measured with radiation monitor and digital thermometer. The whole assembly is placed on a stand structure made from sheet metal . A pipe is fixed to supply saline water to inlet. To vary the water in stills provisions are made. During the experiment the external temperature, glass temperature, temperature inside the still, water surface temperature, sheet metal wall temperature and portable water generated were also measured at a interval of 60 min from 9 AM to 5 PM. A cross section pipe is employed to hold down the pure condensed water from the solar stills to the collecting container which is provided outside the solar still.

## International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: [www.ijirset.com](http://www.ijirset.com)

Vol. 9, Issue 2, February 2020

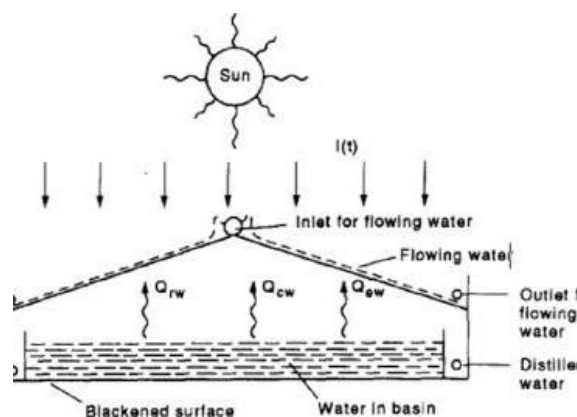


Fig. 1

### III. MATERIALS AND DEVICE USED

For Both stills with and without Nano Particles :-

- Black coating(Paint)
- Sheet metal(cast iron)
- Glass
- PVC pipe
- Mini LCD digital thermometer sensor
- Pyrometer
- Thermocol
- Datum tube

### IV. WORKING PRINCIPLE

A basin of solar still has a half layer of water, a four side transparent glass cover over the water is covered the basin and channel for collecting the distillate water from solar still. The glass transmits the sun rays through it and saline water in the basin or solar still is heated by solar radiation which passes through the glass cover and absorbed by the bottom of the solar still. In a solar still, the temperature difference between the water and glass cover is the driving force of the pure water yield. It influences the rate of evaporation from the surface of the water within the basin flowing towards condensing cover. Vapour flows upwards from the hot water and condensate. This condensate water is collected through a channel.


## International Journal of Innovative Research in Science, Engineering and Technology

(A High Impact Factor, Monthly, Peer Reviewed Journal)

Visit: [www.ijirset.com](http://www.ijirset.com)

Vol. 9, Issue 2, February 2020

### V. VARIATION IN WATER SURFACE TEMPERATURE

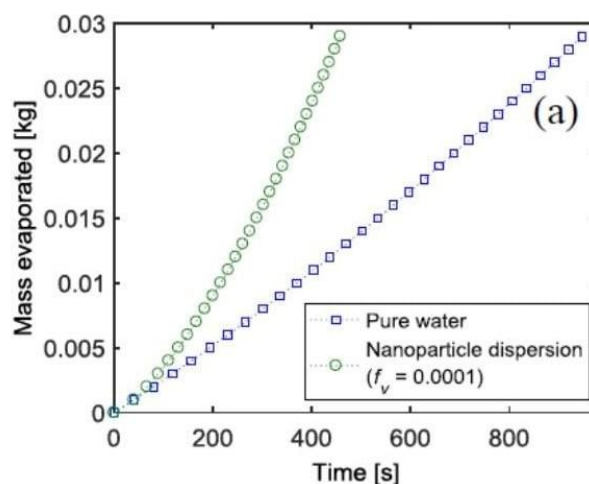

### VI. APPLICATION

- It gives high yield.
- It is easily portable.
- It can provide high productivity.
- It can be used in any places providing high range of heat.
- It will increase thermal conductivity.
- It can be worked in home, office and institutions.

### VII. CONCLUSION

In this study, the aim of the present investigation is to develop a double slope and four side glass with single basin solar still that would assist in increasing the availability of clean water in remote areas. To achieve this the solar still is checked with the absence of Nano Particles and presence of Nano Particles and derived the readings with productivity at Francis Xavier Engineering College, Tirunelveli. The experiments were carried out in actual solar still condition to get the productivity. The experiments conducted in the period of March 2020.. From this experimentation, the normal experimentation regarding the double slope solar still gave the productivity of about 0.85 litres / day and the solar still with the presence of Nano Particles gave the productivity of 0.98 litres / day.

# International Journal of Innovative Research in Science, Engineering and Technology

*(A High Impact Factor, Monthly, Peer Reviewed Journal)*

Visit: [www.ijirset.com](http://www.ijirset.com)

**Vol. 9, Issue 2, February 2020**

## REFERENCES

- 1.Vinoth, K. K., Kasturi, B. R., "Performance study on solar still with enhanced condensation." Desalination, Vol. 230, pp.51–61 (2008).
- 2.Al-Hayek, I., Badran, O. O., "The effect of using different designs of solar stills on water distillation." Desalination, Vol.169, pp. 121-127 (2004).
- 3.Sharaf, M. A., "Thermo-Economic comparisons of different types of solar desalination processes." Journal of Solar Energy Engineering, Vol. 138 (2), pp. 1-10 (2015).
- 4.Lavan, Z., Assouad, Y., "Solar desalination with latent heat recovery." Journal of Solar Energy Engineering, Vol. 110(1), pp. 14-1 (2009).
- 5.Tyagi, H., Phelan, P., Prasher, R., "Predicted efficiency of a low-temperature nanofluid-based direct absorption solar collector." Journal of Solar Energy Engineering, 131(4), pp. 041004 (2009).
- 6.Lenert, A., Wang, E. N., "Optimization of nanofluid volumetric receivers for solar thermal energy conversion." Solar Energy, 86(1), pp. 253–265 (2012).
- 7.Lee, B., J., Park, K., Walsh, T., Xu, L., "Radiative heat transfer analysis in plasmonicnanofluids for direct solar thermal absorption." Journal of Solar Energy Engineering, Vol. 134(2), pp.1-6 (2012).
- 8.Khullar, V., Tyagi, H., Hordy, N., Otanicar, T., Hewakuruppu, Y., Modi, P., Taylor, R., "Harvesting solar thermal energy through nanofluid-based volumetric absorption systems." International Journal of Heat and Mass Transfer, Vol.77, pp.377–384 (2014).