



e-ISSN: 2319-8753 | p-ISSN: 2347-6710

IJIRSET

International Journal of Innovative Research in
SCIENCE | ENGINEERING | TECHNOLOGY



INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

Volume 11, Issue 7, July 2022

ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA

Impact Factor: 8.118



9940 572 462



6381 907 438



ijirset@gmail.com



www.ijirset.com

“SEISMIC ANALYSIS AND DESIGN OF RCC TWISTED BUILDING WITH SWIMMING POOL USING ETab”

¹Mr. Faizan, ²Prof.S. T. Sanap, ²Prof. R. K. Pote, ²Prof. Kasliwal S. S.

M.E Civil (Structural Engineering)

¹PG Student, Department of Civil Engineering, SND Nashik, Pune, India

²Assistant Professor, Department of Civil Engineering, SND Nashik, Pune, India

ABSTRACT—this paper represents the structural behaviour of RCC twisted building subjected to seismic loads with private swimming of the high rise twisted building using ETab. In a twisted tall building various rate of twist and positions of swimming pools for RCC twisted building will be analyzed. The different rate of twist 1.5, 2, 2.5, 3 & 3.5 degree per floor for twisted building are considered. The modelling and analysis will be done using ETab. Results obtained will be plotted for parameters such as storey displacement, storey drift and base shear. The aim of this project is to achieve the optimum swimming pool position and angle of twist of twisted building for 1.5, 2, 2.5, 3 and 3.5 degree per floor angle of twist for different storey.

KEYWORDS—Twisted Building, Swimming Pool, ETab, Seismic Analysis,

INTRODUCTION

An earthquake is a natural tragedy that has claimed millions of lives throughout known and unwritten history. An earthquake is a disruptive disturbance that generates surface shaking owing to subsurface movement along a fault line or volcanic activity. The produced forces are irresponsible and only last a brief time. Humans are puzzled by its ambiguity in terms of occurrence time and nature. However, with the advancement of knowledge throughout the years, a degree of probabilistic predictability has been reached.

The ability to predict the recurrence and strength of earthquakes for a certain region has improved, but this only solves one half of the problem: knowing what's coming! The second phase is structural seismic design - to resist the storm! This component of the problem has evolved throughout the previous century, with advancements in design philosophy and methodology continually investigated, proposed, and implemented. This chapter introduces the notion of foundation isolation for earthquake-resistant structure design. The usefulness of seismic

isolation is proved by modeling and analysis of multi-storey buildings, bridges, and pools.

The trend of RCC high rise structures has increased nowadays in India. Many different amenities like swimming pool, garden etc. have been provided in high story building which is very attractive from an aesthetic point of view but it is dangerous from a structural point of view.

The swimming pool is a heavy weight and the detailing is complicated, but it is not much different than other structural loads. If the pool were to break for some reason and all the water rushed out, it would destroy some interior and possibly some windows. In most cases, the extra water mass will help the building resist earthquakes by acting as a liquid mass dampener. Tall buildings carry very large gravity and lateral loads.

Twisted tall buildings of various heights, height to width aspect ratios and rates of twist are designed and their structural efficiency is investigated. Due to the unique geometric configurations of twisted forms, structural buildings are quite different from that employed for tall buildings of rectangular box forms. Twisted forms involve not only structural but also architectural and constructional challenges.

- Due to the unique geometric configurations of twisted forms, structural buildings are quite different from that employed for tall buildings of rectangular box forms. Twisted forms involve not only structural but also architectural and constructional challenges.
- This project investigates about the optimum twist angle and position of swimming pool of the RCC building.
- To increase value in certain buildings there are associated risks that we take like providing swimming pool.
- The amenities like swimming pool provided in high storey building are attractive from aesthetic point of view.
- This project represents the structural behaviour of RCC

twisted building subjected to static load.

- In this project non-linear static method is being used.

Problem Statement

A twisted RCC building exposed to seismic loads utilizing ETab. The twist rate of RCC twisted buildings will be studied. Each level grows at its own rate. ETab will model. Base shear and storey displacement data will be shown. This project's goal is to find the best swimming pool position and angle.

Aim

“To find optimum angle of twist and position of swimming pool of RCC twisted buildings under seismic loads.”

Objectives

- ✓ Comparatively Study Design and analysis of RCC twisted building with private swimming pools for G+20, G+40, by using ETab
- ✓ To study RCC twisted building for 1.5, 2, 2.5, 3, 3.5 degree per floor angle of twist for G+20, G+40,
- ✓ To study RCC twisted building for swimming pool positions on alternate floor
- ✓ To study the parameters such as storey displacement, storey drift and baseshear etc

RESEARCH METHODOLOGY

The Methods of Earthquake Analysis

Two broad approaches of earthquake analysis of multi – storied structures are

A. Static Analysis–

- II) Equivalent Static Method – its linear static method. In this method formulas are developed to approximately represent behavior of regular structures. Base shear is calculated and distributed to various floor levels. This method is not used for irregular structures.

- **Response Spectrum Method** – It is a linear dynamic method. This method estimates peak values of response quantities. It can be used for any type of building and at all locations.
- The work consists of G+20, G+40 buildings and each building has given angle of twist and swimming pool positions. For each angle of twist there will be seven buildings considering swimming pool positions.
- For modeling and analysis of buildings ETab will be used.
- The parameters storey displacement, storey drift and base shear will be checked and their graphical

representation will be made.

- Results
- Conclusion

Design Input Data

Material grade m50 fe500

- Beam = 0.815X0.4m
- Colum = 0.18X0.8m
- Colum = 1.3X1.3m
- Wall = 0.3m
- Wall = 0.4m
- Load pattern :-
 - Dead load
 - Live load
 - Super red load
- 4 Earth quake: x direction
- Earth quake: Y direction
- 6) Wind load: x direction
- 7) Wind load: Y direction
- Response spectrum analysis

DESIGN & MODELLING

Response spectrum analysis:-

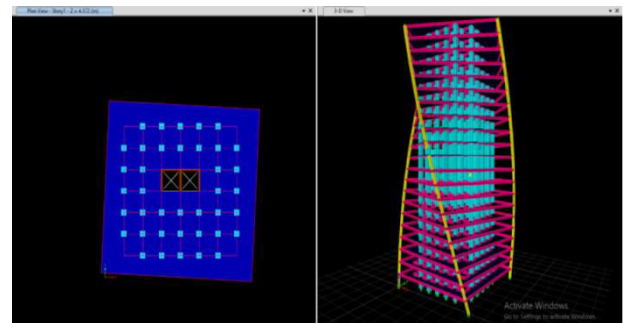


Figure1.1: 2 Degree Model design

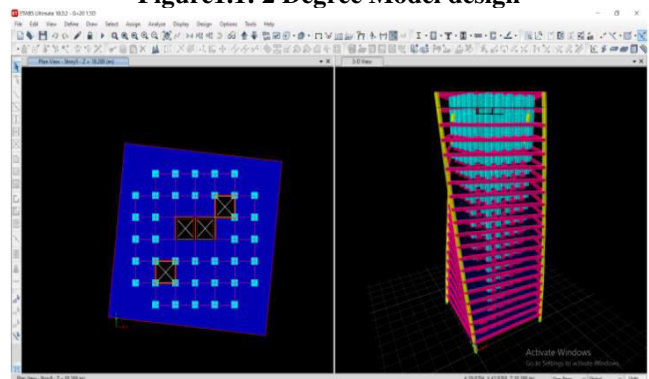


Figure1.2: 1.5 Degree Model design

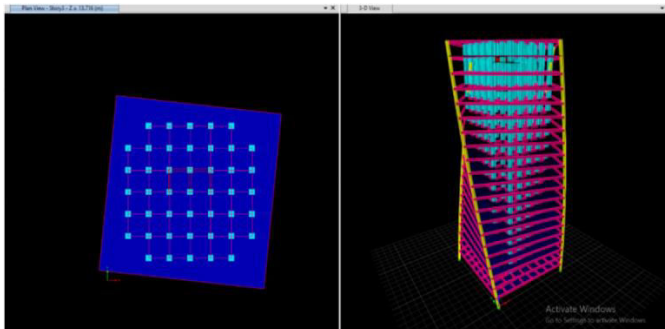


Figure 1.3: 2.5 Degree Model design

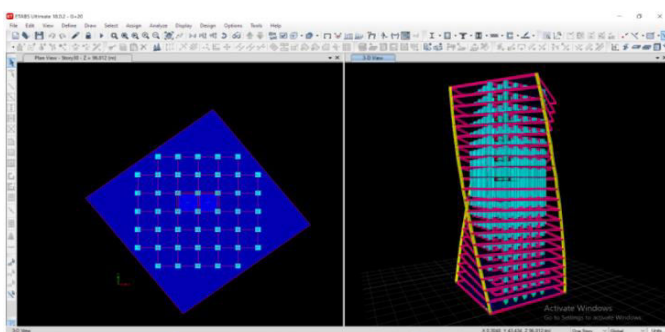


Figure 1.4: 3 Degree Model design


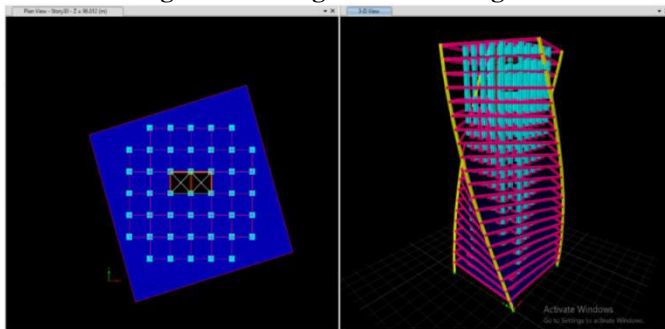


Figure 1.5: 3.5 Degree Model design

RESULT & DISCUSSION

Storey Displacement

MAXIMUM STORY DISPLACEMENT					
STORY	1.5 D	2.0 D	2.5 D	3.0 D	3.5 D
BASE	0	0	0	0	0
STOREY 1	0.007826	0.010871	0.010439	0.010373	0.010111
STOREY 2	0.021913	0.029927	0.02895	0.028899	0.028305
STOREY 3	0.038784	0.052384	0.050964	0.051082	0.050196
STOREY 4	0.057276	0.076441	0.074616	0.075017	0.073881
STOREY 5	0.077074	0.102076	0.09995	0.100644	0.099255
STOREY 6	0.097442	0.12832	0.126012	0.126925	0.125194
STOREY 7	0.118302	0.155319	0.152852	0.153915	0.151748
STOREY 8	0.139103	0.182189	0.179501	0.180689	0.177994
STOREY 9	0.159909	0.209147	0.206493	0.207321	0.203906
STOREY 10	0.180328	0.23561	0.232928	0.233213	0.228803
STOREY 11	0.200431	0.261755	0.260082	0.258464	0.252742
STOREY 12	0.219785	0.287126	0.283779	0.282577	0.275253
STOREY 13	0.23839	0.311937	0.309597	0.305578	0.296358
STOREY 14	0.256441	0.335806	0.332839	0.327187	0.315739
STOREY 15	0.273905	0.358799	0.353382	0.347439	0.333484
STOREY 16	0.290434	0.380697	0.376096	0.36607	0.349361
STOREY 17	0.306007	0.4015	0.393854	0.383069	0.363463
STOREY 18	0.320482	0.420995	0.413982	0.398302	0.375634
STOREY 19	0.333793	0.439096	0.428531	0.411737	0.385969
STOREY 20	0.345764	0.455488	0.443305	0.423135	0.394155
STOREY 21	0.356105	0.469355	0.455509	0.431967	0.400068

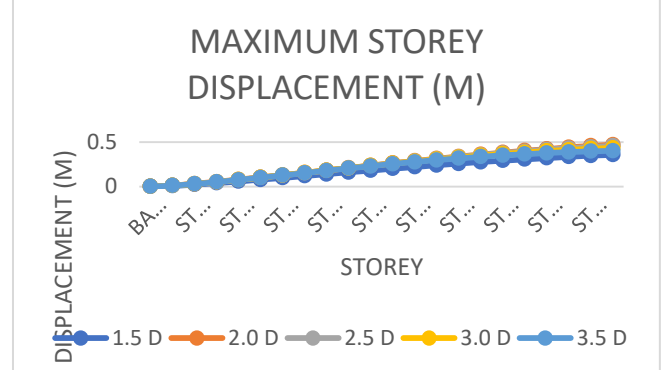


Storey Stiffness


MAXIMUM STORY STIFFNESS					
STORY	1.5 D	2.0 D	2.5 D	3.0 D	3.5 D
BASE	0	0	0	0	0
STOREY 1	8983249	5834606	5951474	5624788	5411247
STOREY 2	13677186	9192840	9268659	8421170	8062520
STOREY 3	4200058	2738482	2771621	2612386	2489538
STOREY 4	11272205	7523149	7558529	7025351	6682081
STOREY 5	3720041	2395097	2418585	2304928	2190744
STOREY 6	10557219	6752164	6791559	6412949	6098333
STOREY 7	3529642	2188658	2218778	2133050	2030457
STOREY 8	10139622	6340067	6349939	6020319	5688625
STOREY 9	3408276	2072753	2066994	2026377	1930434
STOREY 10	9830047	6105459	6055533	5748765	5463091
STOREY 11	3310616	1996202	2017826	1940511	1875497
STOREY 12	9655483	5977616	5998779	5726804	5458274
STOREY 13	3271079	1940678	1953992	1911379	1855916
STOREY 14	9454883	5883059	5791902	5715927	5526493
STOREY 15	3122760	1889671	1872090	1868699	1838983
STOREY 16	9300014	5679889	5509233	5603154	5480627
STOREY 17	2964887	1773377	1754852	1776520	1771011
STOREY 18	8595911	5086785	4936588	5183900	5129346
STOREY 19	2536232	1477177	1466834	1512942	1532359
STOREY 20	6298010	3478627	3466862	3799235	3935475
STOREY 21	1192626	672168.3	770685.7	793757.2	877197.4

MAXIMUM OVERTURNING MOMENT					
STORY	1.5 D	2.0 D	2.5 D	3.0 D	3.5 D
BASE	7992972	5039763	4843236	4767568	4664354
STOREY 1	7435627	4687095	4505976	4435982	4341697
STOREY 2	6895133	4350527	4183723	4119615	4034637
STOREY 3	6374621	4032478	3878758	3820733	3745451
STOREY 4	5875781	3733361	3591651	3539840	3474630
STOREY 5	5398183	3451657	3321095	3275540	3220682
STOREY 6	4940119	3184284	3064331	3024946	2980595
STOREY 7	4498840	2927579	2817974	2784565	2750612
STOREY 8	4071657	2677666	2578442	2550692	2526897
STOREY 9	3655903	2431338	2362985	2320197	2305982
STOREY 10	3249881	2186034	2108305	2090588	2085318
STOREY 11	2851942	1940011	1873594	1860094	1862830
STOREY 12	2462034	1692707	1637947	1628102	1637893
STOREY 13	2079790	1444181	1401303	1394517	1410167
STOREY 14	1707519	1196794	1165716	1161407	1181639
STOREY 15	1348158	953289.2	933529	931151.5	954492.7
STOREY 16	1009940	720176.1	710627.1	709652.1	734349.9
STOREY 17	700400.9	503422.3	502382.4	502322.6	526574.4
STOREY 18	432851.6	313656	318494.9	318922	340431.9
STOREY 19	217695.6	159003.4	166592	167019.8	183761.7
STOREY 20	70171.61	51918.8	62009.42	58253.51	67593.2
STOREY 21	0	0	2.18E-05	1.04E-05	6.43E-06

STOREY STIFFNESS (KN/M)

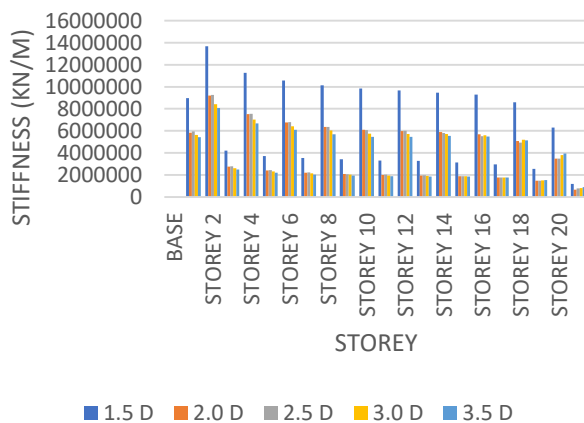

OVERTURNING MOMENT (KNM)

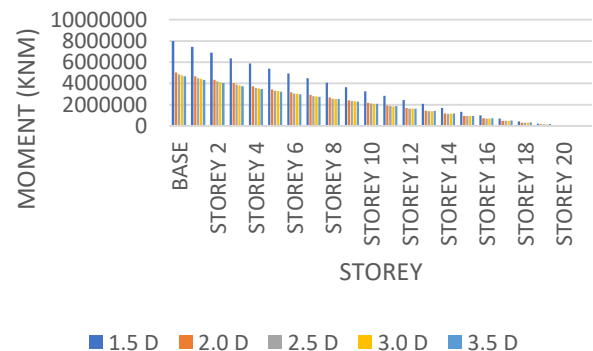

MAXIMUM STORY ACCELERATION (M/SEC ²)					
STORY	1.5 D	2.0 D	2.5 D	3.0 D	3.5 D
BASE	0	0	0	0	0
STOREY 1	0.878	0.966	0.954	0.954	0.944
STOREY 2	2.282	2.431	2.41	2.425	2.411
STOREY 3	3.693	3.845	3.834	3.868	3.854
STOREY 4	4.938	5.032	5.034	5.093	5.085
STOREY 5	5.938	5.961	5.987	6.066	6.073
STOREY 6	6.627	6.585	6.642	6.742	6.769
STOREY 7	6.979	6.898	6.995	7.104	7.157
STOREY 8	7.036	6.95	7.086	7.194	7.269
STOREY 9	6.887	6.821	6.973	7.078	7.168
STOREY 10	6.693	6.668	6.838	6.921	7.009
STOREY 11	6.55	6.55	6.752	6.79	6.866
STOREY 12	6.463	6.437	6.616	6.676	6.735
STOREY 13	6.324	6.189	6.409	6.439	6.488
STOREY 14	6.08	5.772	6.001	6.035	6.066
STOREY 15	5.774	5.23	5.428	5.491	5.488
STOREY 16	5.638	4.899	5.087	5.111	5.026
STOREY 17	5.931	5.134	5.215	5.222	5.006
STOREY 18	6.79	6.107	6.123	6.043	5.685
STOREY 19	8.063	7.573	7.497	7.382	6.91
STOREY 20	9.43	9.147	9.056	8.865	8.301
STOREY 21	10.591	10.489	10.46	10.173	9.57

Design and Modelling for G+ 40 Storey's

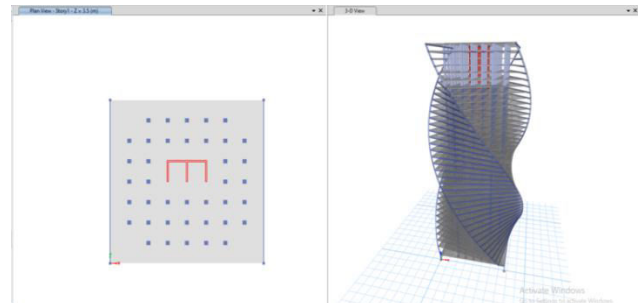


Figure4.6: 1.5 Degree Plan & 3D View

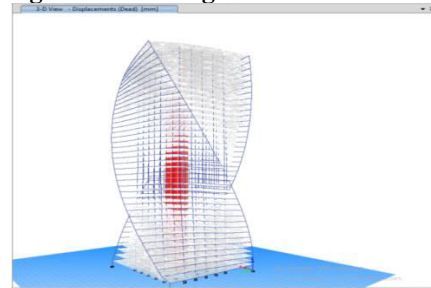


Figure1.7: 2 Degree Model design



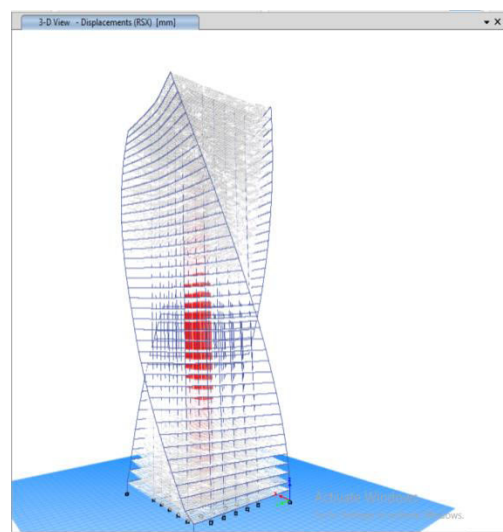


Figure1.8: 2.5 Degree Displacement due to dead load

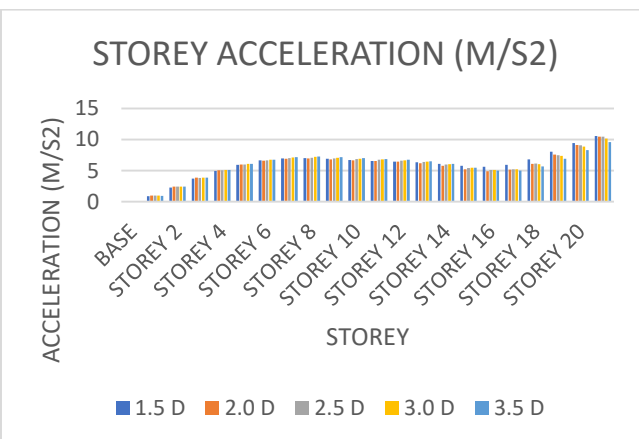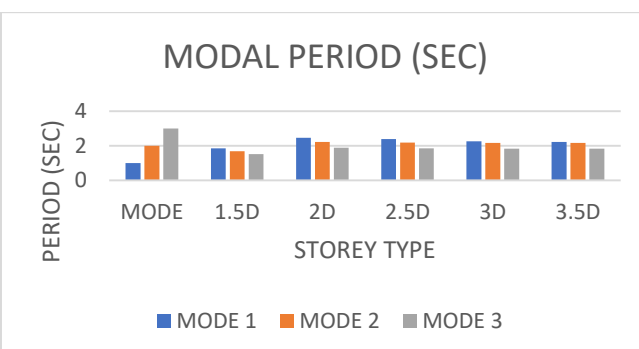

MODAL PERIODS (SEC)					
MODE	1.5D	2D	2.5D	3D	3.5D
1	1.853	2.457	2.387	2.26	2.216
2	1.687	2.224	2.188	2.165	2.161
3	1.519	1.894	1.851	1.837	1.838



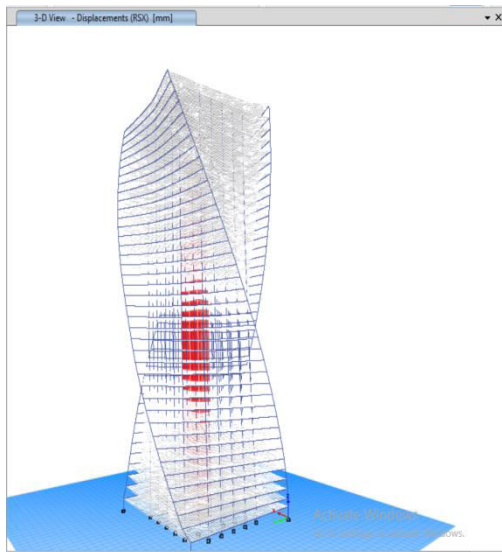


Figure1.9: 3 Degree Displacement due to Earthquake load X direction

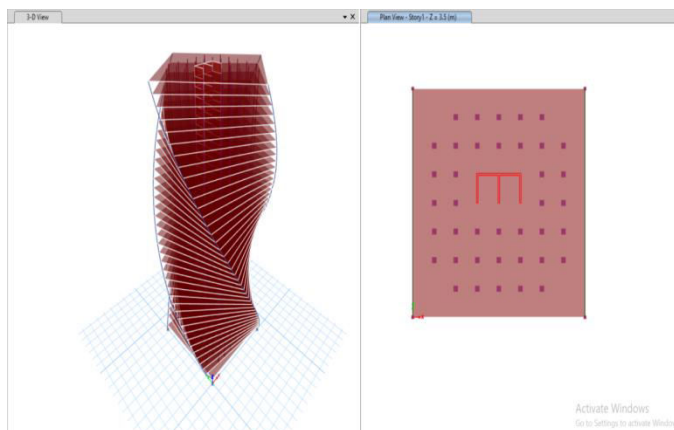


Figure1.10: Plan & 3D View of 3.5 Degree

ANALYSIS FOR G+40 STOREY BUILDING


Table: Story Displacement

STORE Y	1.5D	2D	2.5D	3D	3.5D
Story40	162.12 5	154.21 2	162.12 5	156.81 5	150.67 2
Story39	155.44 3	153.08 2	159.44 3	154.08 2	148.13 8
Story38	154.63 2	152.01 6	156.63 2	151.2	145.52 9
Story37	153.53	151.96	153.73	148.19	142.76

	2	2	2	6	2
Story36	151.73 7	149.15 3	150.73 7	145.05 2	139.84
Story35	146.65	148.03 2	147.65	141.77 9	136.75 8
Story35	143.40 8	148.15 9	144.40 8	138.36	133.50 2
Story34	142.45 4	145.36 1	141.46 4	134.79 8	130.07 3
Story33	137.48 6	141.56	138.49 6	131.45 8	126.48 4
Story32	133.30 1	139.20 5	135.40 5	128.28 6	122.75 3
Story31	130.18 6	134.98 6	132.18 6	124.98	118.88 8
Story30	129.73 5	129.83 5	128.83 5	121.53 6	115.34
Story29	124.32 3	125.34 3	125.34 3	117.94 7	111.95 1
Story28	121.75 9	121.70 9	121.70 9	114.20 8	108.43 3
Story27	117.92 8	119.21	117.92 8	111.81 3	104.78 3
Story26	113.99 8	111.23 8	113.99 8	106.43	101.00 4
Story25	109.91 8	108.39 1	109.91 8	102.37 2	97.099
Story24	105.68	108.43 3	105.68	98.406	93.069
Story23	101.28 8	104.78 3	101.28 8	94.294	88.919
Story22	96.744	101.00 4	96.744	90.11	84.648
Story21	92.046	97.099	92.046	85.834	80.266
Story20	87.211	93.069	87.211	81.465	76.137
Story19	82.236	88.919	82.236	76.996	71.991


Story18	77.132	84.648	77.132	72.415	67.788
Story17	71.908	80.266	71.908	67.726	63.514
Story16	66.566	76.137	66.566	62.932	59.171
Story15	61.132	71.991	61.132	58.03	54.751
Story14	57.65	55.89	57.65	55.89	52.748
Story13	55.633	53.038	55.633	53.038	50.239
Story12	49.097	47.966	50.087	47.966	45.644
Story11	43.548	42.841	44.528	42.841	40.961
Story10	36.991	37.685	38.991	37.685	36.219
Story9	32.521	32.54	33.521	32.54	31.443
Story8	28.143	27.456	28.163	27.456	26.684
Story7	22.94	22.493	22.98	22.493	21.975
Story6	17.999	17.725	18.042	17.725	17.389
Story5	12.44	13.258	13.44	13.245	13.369
Story4	9.277	11.298	9.287	9.176	9.087
Story3	5.562	8.358	5.572	5.474	5.421
Story2	2.655	4.201	2.755	2.739	2.793
Story1	1.518	1.016	1.618	1.92	2.127
Base	0	0	0	0	0

STOREY	1.5 D	2D	2.5D	3 D	.5D
Story40	0.002378	0.000857	0.000842	0.000867	0.043048
Story39	0.004171	0.000899	0.000889	0.000912	0.000923
Story38	0.004922	0.000956	0.000922	0.000956	0.000959
Story37	0.005282	0.001002	0.042793	0.001002	0.000989
Story36	0.005646	0.001043	0.043067	0.001043	0.001018
Story35	0.005807	0.001087	0.001028	0.001087	0.001046
Story35	0.006017	0.001128	0.001078	0.001128	0.001099
Story34	0.006044	0.001166	0.001121	0.001166	0.001146
Story33	0.006141	0.0012	0.001171	0.0012	0.001187
Story32	0.006111	0.001231	0.001218	0.001231	0.001223
Story31	0.006144	0.001258	0.001259	0.001258	0.001254
Story30	0.006059	0.001292	0.001302	0.001292	0.001283
Story29	0.006046	0.001331	0.001339	0.001331	0.0013
Story28	0.005913	0.031947	0.001376	0.031947	0.001317
Story27	0.005809	0.031947	0.001409	0.031947	0.001329
Story26	0.005599	0.001416	0.001436	0.001416	0.00135
Story25	0.005385	0.001443	0.001462	0.001443	0.00138
Story24	0.005051	0.001463	0.001484	0.001463	0.001404
Story23	0.004679	0.001484	0.001502	0.001484	0.001425
Story22	0.004179	0.001495	0.001517	0.001495	0.022923
Story21	0.003654	0.001501	0.001535	0.001501	0.022923
Story20	0.001712	0.001503	0.00156	0.001503	0.001467
Story19	0.003082	0.0015	0.001581	0.0015	0.001472
Story18	0.003694	0.001519	0.001597	0.001519	0.001471
Story17	0.004054	0.001533	0.001607	0.001533	0.001458
Story16	0.004351	0.001538	0.001609	0.001538	0.001454
Story15	0.004494	0.001537	0.001602	0.001537	0.001463
Story14	0.00463	0.001524	0.001607	0.001524	0.001463
Story13	0.004653	0.001503	0.001607	0.001503	0.001452
Story12	0.004704	0.001488	0.001597	0.001488	0.00143
Story11	0.00467	0.001481	0.001574	0.001481	0.001393
Story10	0.004659	0.00146	0.001539	0.00146	0.001367
Story9	0.00454	0.001423	0.001486	0.001423	0.00135
Story8	0.004425	0.001365	0.001414	0.001365	0.001313
Story7	0.004345	0.001324	0.001365	0.001324	0.001245
Story6	0.004255	0.001282	0.001317	0.001282	0.001149
Story5	0.004057	0.001163	0.001188	0.001163	0.001225
Story4	0.003847	0.001059	0.001062	0.001059	0.001048
Story3	0.003575	0.000918	0.000898	0.000918	0.000946
Story2	0.003274	0.000626	0.000589	0.000626	0.000715
Story1	0.002909	0.000549	0.000462	0.000549	0.000608
Base	0	0	0	0	0

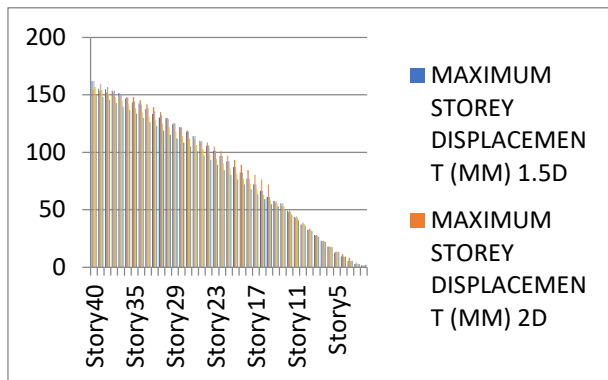

Graph: Story Displacement

3

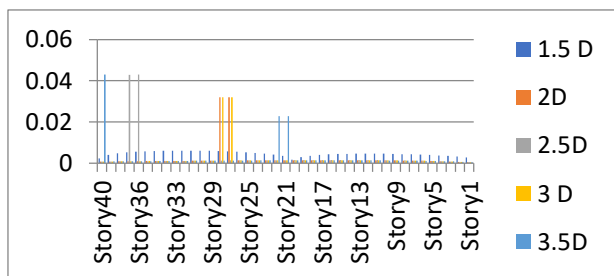


Graph: Maximum Story Drift

Table1.8: Maximum Story Drift

STORY	1.5D	2D	2.5D	3 D	3.5D
Story40	0	0	0	0	0
Story39	2960.486	2964.2352	2956.843	2964.235	2980.679
Story38	207733.6	8736.0167	8799.023	8826.017	8877.878
Story37	227549	17152.6848	16991.27	17052.69	17157.26
Story36	248115.3	27140.9891	27017.82	27130.97	27303.7
Story35	269364	38593.5354	38409.54	38593.54	38847.88
Story34	78379.15	51045.0447	50770.13	51045.04	51392.44
Story33	92542.66	64184.5023	63798.9	64184.5	64634.36
Story32	107138.1	77819.5962	77305.65	77819.6	78379.15
Story31	122249.1	91868.646	91212.71	91868.65	92542.66
Story30	137994	106347.7819	105542	106347.8	107138.1
Story29	154488.1	121344.1364	120388.1	121344.1	122249.1
Story28	17181	136979.8	13588	13697	13799

9	4.2	08	1.5	9.8	4
Story28	19000	153374.3	15215	15337	15448
Story27	6.2	878	0	4.4	8.1
Story26	209048	170614.7	16928	17061	17181
Story25	22888	188738.6	18733	18873	19000
Story24	6.3	541	8.2	8.7	6.2
Story23	249449.9	207733.5	20629	20773	20904
Story22	270669.3	227548.9	22610	22754	22888
Story21	292493	248115.3	24669	24811	24944
Story20	314892	269364.0	26801	26936	27066
Story19	0.9	109	0.4	4	9.3
Story18	33785	291242.4	28998	29124	29249
Story17	9.7	224	7	2.4	2.3
Story16	34987	313721.0	31259	31372	31489
Story15	2.2	722	6	1.1	0.9
Story14	361409	336792.0	33582	33679	33785
Story13	7.3	671	7.2	2.1	9.7
Story12	385544.2	345216.8	34627	34521	34987
Story11	4.2	8.3	6.8	2.2	2.2
Story10	41027	360460.7	35968	36046	36140
Story9	0.9	198	3	0.7	7.3
Story8	43557	384733.6	38416	38473	38554
Story7	0.4	549	6.6	3.7	4.2
Story6	46140	409607.4	40927	40960	41027
Story5	6.9	104	0.5	7.4	0.9
Story4	48773	435061.0	43496	43506	43557
Story3	0.2	444	9.3	1	0.4
Story2	51444	461054.8	46121	46105	46140
Story1	4.1	351	8.6	4.8	6.9
Story0	54173	487535.1	48796	48753	48773
Story-1	0.1	953	0	5.2	0.2
Story-2	56935	514444.0	51513	51444	51448
Story-3	7.7	89	1.1	4.1	5.4
Story-4	59731	541730.0	54267	54173	54162
Story-5	2.8	656	6	0.1	4
Story-6	62560	569357.7	57055	56935	56911
Story-7	1.7	01	5.6	7.7	3.4
Story-8	65424	597312.7	59875	59731	59694
Story-9	5.7	686	2.6	2.8	1.8
Story-10	68327	625601.7	62727	62560	62511
Story-11	0.5	335	0.8	1.7	8.2
Story-12	71269	654245.6	65612	65424	65366
Story-13	5.7	97	9.6	5.7	5.6
Story-14	74252	683270.4	68535	68327	68261
Story-15	5.4	905	3.6	0.5	1.6
Story-16	77274	722685.6	71496	71269	71197
Story-17	4	484	1.9	5.7	6.5
Story-18	74176	754225.3	74396	74252	74176
Story-19	4.7	869	4	5.4	4.7
Story-20	77195	782843.9	77532	77274	77195

	9.9	955	9.6	4	9.9
Story1	80252 7.1	813327.5 282	80604 0.8	80331 7.5	80252 7.1
Base	83448 6.6	834102.1 422	83704 9.9	83420 2.1	83342 8.9

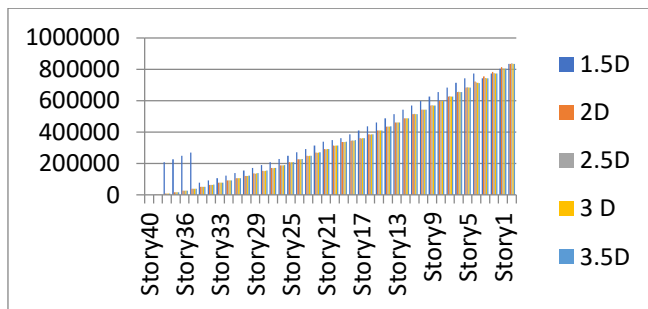


Graph1.9: Maximum Overturning Moment

Story	1.5D	2 D	2.5D	3 D	3.5D
Story40	287158.08	297256.36	306284.099	297256.36	348691.845
Story39	560721.497	560821.567	578621.886	560821.567	671650.784
Story38	747921.316	758819.366	781298.481	758819.366	929913.983
Story37	888356.067	898465.078	923379.235	898465.078	1131652.505
Story36	979123.862	989222.945	1014361.716	989222.945	1280992.007
Story35	1079111.621	1044931.368	1068137.273	1044931.368	1385371.433
Story34	1104453.558	1079111.621	1099869.984	1079111.621	1452667.107
Story33	1130033.346	1104453.558	1121233.793	1104453.558	1494472.066
Story32	1161037.127	1130033.346	1141906.956	1130033.346	1524389.027
Story31	1198247.724	1161037.127	1167748.353	1161037.127	1551034.301
Story30	1239115.005	1198247.724	1199175.294	1198247.724	1578846.675


Story29	1281393.026	1239115.005	1233924.156	1239115.005	1589231.242
Story28	1319428.848	1281393.026	1268177.622	1281393.026	1614544.45
Story27	1349169.257	1319428.848	1297588.953	1319428.848	1657695.595
Story26	1371685.252	1349169.257	1320981.642	1349169.257	1716674.364
Story25	1490041.254	1371685.252	1337871.129	1371685.252	1783329.638
Story24	1519519.535	1392055.439	1348903.463	1392055.439	1855514.744
Story23	1550386.024	1408123.873	1356446.027	1408123.873	1929824.119
Story22	1580923.599	1423241.97	1363745.147	1423241.97	2001801.857
Story21	1611729.281	1441525.052	1374402.53	1441525.052	2070544.725
Story20	1642748.988	1463941.45	1389251.333	1463941.45	2134306.071
Story19	1674811.262	1490041.254	1407588.936	1490041.254	2191713.209
Story18	1712326.598	1519519.535	1430082.08	1519519.535	2244583.484
Story17	1759957.185	1550386.024	1454848.394	1550386.024	2295294.048
Story16	1131652.505	1580923.599	1478902.631	1580923.599	2346203.322
Story15	1280992.007	1611729.281	1503631.21	1611729.281	2402162.127
Story14	1385371.433	1642748.988	1530087.086	1642748.988	2465653.332
Story13	1452667.107	1674811.262	1559309.121	1674811.262	2544076.723
Story12	1494472.066	1712326.598	1593853.773	1712326.598	2641581.695

Stor	152438	175995	163820	175995	276097
y11	9.027	7.185	0.864	7.185	1.254
Stor	155103	182326	169929	182326	290689
y10	4.301	7.35	1.53	7.35	2.473
Stor	157884	191083	178310	191083	308639
y9	6.675	9.325	2.248	9.325	8.385
Stor	158923	202837	189618	202837	330060
y8	1.242	6.923	4.231	6.923	3.981
Stor	161454	218836	205119	218836	355972
y7	4.45	0.874	5.722	0.874	5.82
Stor	178310	240981	226517	240981	388906
y6	2.248	0.572	7.447	0.572	8.083
Stor	189618	272480	256895	272480	435188
y5	4.231	0.428	1.444	0.428	4.545
Stor	205119	320372	304450	320372	499339
y4	5.722	5.52	6.349	5.52	6.758
Stor	226517	407647	387876	407647	612213
y3	7.447	8.869	5.166	8.869	9.692
Stor	256895	617021	582061	617021	857412
y2	1.444	6.916	7.937	6.916	7.417
Stor	304450	840343	918040	840343	809148
y1	6.349	1.29	4.26	1.29	6.113
Base	0	0	0	0	0

STOE Y	1.5D	2D	2.5D	3 D	3.5D
Story40	689.41	589.39	586.31	642.51	574.39
Story39	509.78	567.7	521.9	567.7	521.9
Story38	429.78	476.19	461.33	486.19	461.33
Story37	378.67	368.94	350.8	402.45	395.27
Story36	379.07	325.09	277.09	321.51	327.91
Story35	379.37	389.79	221.56	250.9	265.93
Story35	373.84	265.38	207.39	21.16	220.27
Story34	359.08	321.51	213.72	215.77	214.1
Story33	338.73	250.9	218.98	216.52	226.54
Story32	318.53	21.16	250.93	215.19	270.57
Story31	305.87	215.77	299.35	255.83	321.44
Story30	307.3	216.52	344.29	299.93	368.6
Story29	324.75	215.19	381.1	337.7	405.41
Story28	373.75	255.83	406.85	364.68	428.4
Story27	337.49	299.93	419.81	378.67	435.73
Story26	303.27	418.29	419.52	379.07	427.48
Story25	277.76	461.33	406.82	379.37	405.55
Story24	284.31	395.27	384.21	373.84	373.75
Story23	305.31	327.91	356.18	359.08	337.49
Story22	337.7	265.93	329.46	338.73	303.27
Story21	375.34	220.27	312.09	318.53	277.76
Story20	411.97	214.1	310.58	305.87	284.31
Story19	442.34	226.54	326.24	307.3	305.31
Story18	463.05	270.57	354.33	324.75	337.7
Story17	472.34	321.44	387.55	354.4	375.34
Story16	469.72	368.6	419.29	389.36	411.97
Story15	460.25	405.41	444.77	422.99	442.34
Story14	455.41	277.09	461.13	450.28	463.05
Story13	430.26	221.56	466.88	467.91	472.34
Story12	395.12	207.39	461.69	474.48	469.72
Story11	351.66	213.72	445.87	469.39	460.25
Story10	301.08	218.98	435.25	453.11	455.41
Story9	246.87	250.93	420.08	426.5	430.26
Story8	445.87	299.35	385.26	390.56	395.12
Story7	435.25	344.29	342.54	346.64	351.66
Story6	420.08	381.1	293.4	296.29	301.08
Story5	385.26	219.65	239.63	241.39	246.87
Story4	342.54	182.24	183.32	184.12	187.14
Story3	293.4	125.12	126.52	126.63	128.18
Story2	69.21	70.98	71.73	71.54	71.61
Story1	24.69	25.49	25.69	28.46	33.1
Base	0	0	0	0	0

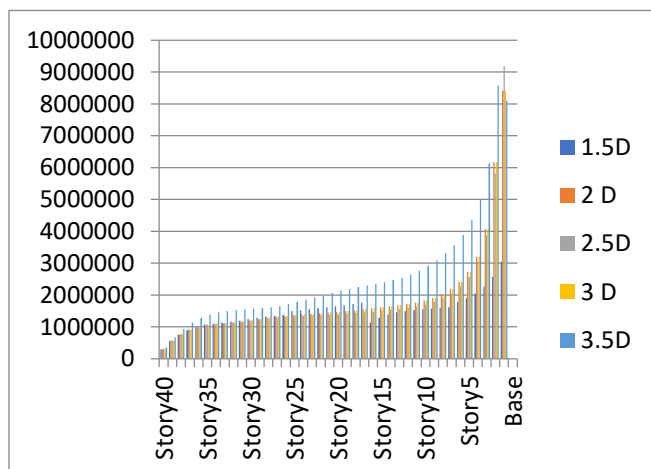

Graph1.10: Maximum Story Stiffness

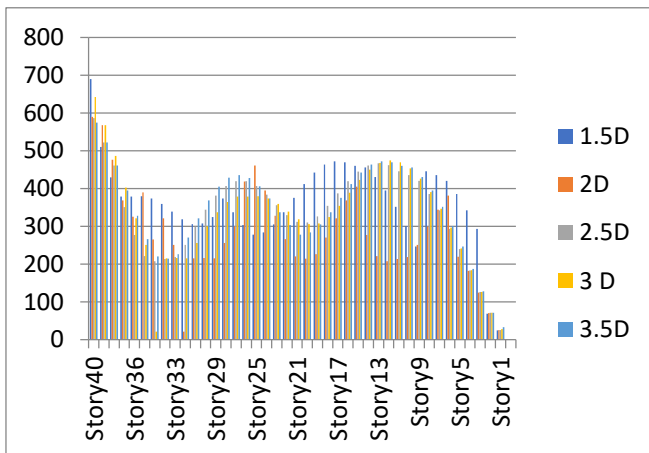Graph: Maximum Storey Accelerations (Mm/Sec²)

Base Shear


MODEL 1.5 D		
EQX	TIME PERIOD (SEC)	BASE SHEAR (KN)
	3.285	9776
EQY	TIME PERIOD (SEC)	BASE SHEAR (KN)
	4.279	9776

MODEL 2 D		
EQX	TIME PERIOD (SEC)	BASE SHEAR (KN)
	4.435	10875
EQY	TIME PERIOD (SEC)	BASE SHEAR (KN)
	5.179	10875
MODEL 2.5D		
EQX	TIME PERIOD (SEC)	BASE SHEAR (KN)
	5.435	11975
EQY	TIME PERIOD (SEC)	BASE SHEAR (KN)
	6.179	11975
MODEL 3 D		
EQX	TIME PERIOD (SEC)	BASE SHEAR (KN)
	5.178	11982.5956

EQY	TIME PERIOD (SEC)	BASE SHEAR (KN)
	6.033	11982.5956
MODEL 3.5D		
EQX	TIME PERIOD (SEC)	BASE SHEAR (KN)
	5.058	12189.3381
EQY	TIME PERIOD (SEC)	BASE SHEAR (KN)
	5.907	12189.3381

BASE SHEAR

Twist	Base Shear
1.5 D	9776
2 D	10875
2.5D	11975
3 D	11982.59
3.5D	12189.33

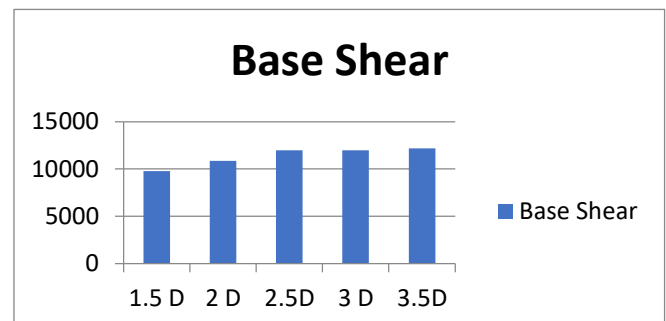

CONCLUSION

When the rotation of the structure is increases then the base shear is also increase the total 3.5D structure base is higher than the remaining the structure. The base shear is 5% to 15% increases as compare to the other structure.

The maximum storey acceleration of the structure is 1.5D is increased by 14 %, 14.05%, 8%, and 16% as compared to the 2D , 2.5D , 3D and 3.5D when we decreases the twisted angle then the acceleration is increases.

The Storey Stiffness 2.5D is increases by 6-7% around but 1.5D is decreasing by 66% around means when we increases the twist angle of floor then the Stiffness also increases.

The overturning moment effect of the all structure all near about the same the only 1-2% slightly increases 2.5D structure. Means no effect of floor rotation on the moment. It was increases when increases the storey height.

The maximum storey displacement of the structure 2.5D is increase 6% as compared to other type of structure all around displace nearly same means when we twisted the floor displacement is decreases.

When we increase the rotation of the floor then the modal time period is also decreases

The maximum storey acceleration of the structure is 1.5D is increased by 2 %, 1.5%, 3%, and 1.8% as compared to the 2D , 2.5D , 3D and 3.5D when we decreases the twisted angle then the acceleration is increases.

storey stiffness is for 1.5D Is increasing by 43 % , 35% , 33.5% and 26.4% as compare to the 2D , 2.5D , 3D and 3.5D model

The overturning moment is for 1.5D is increasing by 41 % , 33.4%, 31.5% and 24.4% as compare to the 2D, 2.5D, 3D and 3.5D model.

The maximum storey displacement of the structure 2.0D is increase 6% as compared to other type of structure but only 10% 1.5D type of structure .the displacement is varying for floor to floor.

When the rotation of the structure is increases then the base shear is also increase the total 3.5D structure base is higher than the remaining the structure. The base shear is 4% to 12% increases as compare to the other structure.

When we increase the rotation of the floor then the modal time period is also decreases

REFERENCES

- [1]. Kyoung Sun Moon (2010) "Structural Engineering for complex shaped tall buildings" ASCE (2011), AEI 2011.
- [2]. Kyoung Sun Moon (2014) "Structural Design and construction of complex shaped tall buildings" IACSIT International Journal of Engineering and Technology, Vol. 7, No.1, February 2015.
- [3]. Kyoung Sun Moon (2010) "Studies on various structural system design options and their performances" The Structural Design of tall and special building, Struct. Design Tall Spec, Build,(2012), in Wiley Online Library.
- [4]. Kyoung Sun Moon (2011)" Diagrid Structures for Complex Shaped Tall buildings" Procedia Engineering 14 (2011) 1343-1350.
- [5]. KarelVollers Free D Geometries (2011) "High Rise Building with Twisted Facades" CTBUH 2005 7th world congress, New York.
- [6]. ChokshiShreya H., Dalal S.P. , "Performance of an RCC Frame Building Subjected To Hydrodynamic Force At Each Floor Level - A Case Study", IJRET: International Journal of Research in Engineering and Technology , ISSN: 2319-1163, Volume: 04, Issue: 06 June-2015.
- [7]. Scientific & Engineering Research, ISSN 2229-5518, Volume 7, Issue 10, October-2016. → Davidson Shilpa Sara, Kumar Aswathy S , "Study on the Effect of Swimming Pool as Tuned Mass Damper", International Journal of Engineering Research & Technology (IJERT) ISSN: 2278-0181, Volume 6, Issue 06 , Special Issue – 2018.
- [8]. Pawar JagrutiVasant, Prof. Gore N. G., "Systematically Approach for Optimization of Swimming Pool", International Journal of Engineering Sciences & Research Technology, ISSN: 2277-9655, 6(4): April, 2016.
- [9]. Jadhav Amol, Prof. Gore N. G., "Cost Optimization of Roof Top Swimming Pool", International Research Journal of Engineering and Technology (IRJET), e-ISSN: 2395 -0056, Volume: 03 Issue: 01, Jan-2016
- [10]. Chetan Jagtap1, SiddharthPastariya, "Seismic Analysis On Cylindrical Ground Supported Swimming Pool By Varying Their Aspect Ratio", OAIJSE 2020
- [11]. Seismic Analysis of Steel Cylindrical Liquid Storage Pool Using Coupled Acoustic-Structural Finite Element Method For Fluid-Structure Interaction ArunaRawat, VasantMatsagar and A. K. Nagpal, International Journal of Acoustics and Vibration, Vol. 25, No. 1, 2020
- [12]. Case Study on Seismic Analysis of RC Frame Building with Surmounted Swimming Pool as Tuned Liquid Damper Sagar Chaudhary1, AakashSuthar, International Research Journal of Engineering and Technology (IRJET) Dec 2020
- [13]. Numerical and Experimental Investigation of Rectangular Liquid-Containing Structures under Seismic Excitation,ImanBahreiniToussi, MDPI, 22 December 2020
- [14]. Analysis of Sloshing Impact on Overhead Liquid Storage Structures P. Muthu Vijay & Amar Prakash, International Journal of Research in Engineering & Technology, Aug 2018
- [15]. Seismic Response of Elevated Liquid Storage STEEL Pools Under Bi-direction Excitation M. K. Shrimali, Springer 2019
- [16]. Seismic Analysis of RCC Elevated Liquid Storage Pool with Different Supporting Systems and their Behaviour In Various Earthquake Zones DasariVenkata Siva Naga Krishna, JES 2020
- [17]. Impact of Revised Code Provisions of Seismic and Wind Loads on RCC Elevated Swimming Pools Balaji, K.V.G.D, T. Santhosh Kumar, B.Santhosh Kumar, International Journal of Innovative Technology and Exploring Engineering (IJITEE), September 2019
- [18]. Numerical Analysis of the Dynamic Responses of Multistory Structures Equipped with Tuned Liquid Dampers Considering Fluid-Structure Interactions Bui Pham DucTuong, The Open Construction and Building Technology Journal, October 02, 2019
- [19]. Seismic Analysis of Cylindrical Liquid Storage Pool Rupachandra J. Aware, International Journal of Science and Research (IJSR) 2019
- [20]. Seismic Performance of Multistorey Building Founded on Slopes With Swimming Pool 1Aditya Lanjewar, 1Rishabh Mantri, International Journal for Research in Engineering Application & Management (IJREAM), May 2019



INNO SPACE
SJIF Scientific Journal Impact Factor
Impact Factor: 8.118



ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA



INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

 **9940 572 462**  **6381 907 438**  **ijirset@gmail.com**



www.ijirset.com

Scan to save the contact details