



e-ISSN: 2319-8753 | p-ISSN: 2347-6710

IJIRSET

International Journal of Innovative Research in
SCIENCE | ENGINEERING | TECHNOLOGY

INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

Volume 12, Issue 13, April 2023

ISSN INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA

9940 572 462

6381 907 438

ijirset@gmail.com

www.ijirset.com

Performance Analysis of Energy Efficient Multipath Routing Protocols in MANET

R. Praveenkumar¹, K.S Aadhiseshan², R. Naveenkumar², S. Premkumar².

Associate Professor, Department of Electronics and Communication Engineering, Builders Engineering College, Kangeyam, Tiruppur, TamilNadu, India¹

U.G. Student, Department of Electronics and Communication Engineering, Builders Engineering College, Kangeyam, Tiruppur, TamilNadu, India²

ABSTRACT: The energy consumption in MANET by applying the fitness function to optimize the energy consumption in ad hoc on demand multipath distance vector (AOMDV) routing protocol. The proposed protocol is AOMDV with the fitness function (FF-AOMDV). The fitness function is mainly used to find the optimal path from source node to destination node to reduce the energy consumption in multipath routing. The performance of FF-AOMDV protocol has been evaluated by using network simulator version 3, where the performance is compared with optimized link state routing (OLSR) and AOMDV protocol.

KEYWORDS: AOMDV (Ad-hoc On demand Multipath Distance Vector), AOMR-LM (Ad-hoc On demand Multipath Routing with Lifetime Maximization), DYMO (Dynamic Multipath On-demand routing protocol), FFAOMDV (Fitness Function- Ad-hoc On demand Multipath Distance Vector), OLSR (Optimized Link State Routing).

I. INTRODUCTION

MANET has the limited battery power and limited bandwidth. It is expected that the uses and applications of mobile wireless computing will be increased rapidly to utilize the Internet Protocol (IP) for our future development. Mobile ad hoc networks (MANETs) are continuously supporting the effective and robust mobile wireless network operation using the routing protocols to communicate the mobile nodes [1]. In MANET, the topology has been changed rapidly with limited bandwidth-constrained environment. The multipath routing protocols enable the source node to choose the best route among many routes during a single route discovery process.

II. RELATED WORK

Mobile Ad-Hoc Network (MANET) forms a temporary network without the aid of any stand-alone infrastructure or centralized administration. The primary goal of any adhoc network routing protocol is to face the many challenges of dynamically changing network and provide an efficient route between any two nodes with minimum routing overhead and limited bandwidth consumption [2]. Limited routing securities are used in the existing work. An ad-hoc networks environment has a new challenge that it is not a fixed network. A several protocols are introduced to improve the routing mechanism and also find out the route between source and destination host across the network.

A MANET routing protocol should be able to perform the fast and effectively change the network layout. We proposed to increase the reliability of data transmission (i.e., fault tolerance) or to provide load balancing. Load balancing is the important one in MANET because of the limited bandwidth between the nodes [3]. Providing the trustworthy quality of service guarantees in a MANET is very challenging in dynamic and uncertain nature of these networks. Dynamic Multipath On-demand (DYMO) routing protocol for MANETs which uses delay, traffic load etc instead of hop count, as metric for route selection.

A multipath routing protocol is used to maximize the network lifetime [4]. An energy-efficient multipath routing protocol, called ad hoc on-demand multipath routing with lifetime maximization (AOMR-LM), which preserves the residual energy of nodes and also balance the consumed energy to increase the network lifetime. Using the multipath selection mechanism we classify the paths. Two parameters are analysed in this scenario: the energy threshold β and the coefficient α . The parameters are required to classify the nodes and to ensure the preservation of node energy.



Organized by

Dhaanish Ahmed Institute of Technology, KG Chavadi, Coimbatore, India

A MANET is a highly dynamic wireless network that can be formed without the need for any pre-existing infrastructure in which each node can act as a router. In this paper we focus on the AOMDV (Ad-hoc on-demand Multipath Distance Vector) routing protocol. It is an extension to the AODV (Ad-hoc On-demand Distance Vector) routing protocol for computing multiple loops free and link disjoint paths [5]. In ad-hoc networks dynamic link failures and route breaks occur frequently. AOMDV reduce the routing overhead and also reduce the frequency of route discovery operation [6].

Energy conservation is a most important issue in mobile ad hoc networks (MANET), where the terminals are always supplied with limited energy. A new routing protocol is presented in the study of low-energy nodes in ad hoc networks. The energy sensing routing protocol (ESRP) is based on the energy sensing strategy [7]. Multiple strategy routing and substitute routing are both adopted in these MANET. To refer the level of residual energy and the situation of energy consumption, are chosen for the different packets transmission. Using the energy sensing routing protocol to reduce the packet retransmission after that link will be break. We focus on the network lifetime most of all performances. The evaluation is done in comparison with other routing protocols on NS2 platform and the simulation results show that the network lifetime will be increased and balance energy consumption effectively.

III. METHODOLOGY

3.1 Packet delivery ratio: It means the ratio of the data packets that has to be delivered to the destination node to the data packets that were generated by the source. The performance metrics shows that the routing protocols qualify in its delivery of data packets from source to destination [8]. The ratio will be higher; Performance of the routing protocol is improved better. PDR is calculated using the below formula:


$$PDR = \frac{\text{Number of Packet received}}{\text{Number of Packet sent}} * 100$$

3.2 End-to-End delay: It refers to the average time taken by data packets in successfully transmitting messages across the network from source to destination [9]. It includes different types of delays, like queuing at interface queue; retransmission delays; and buffering during the time of route discovery process. Stated below is the formula to calculate the E2E delay: $E2E = \sum (R_i - S_i) n \ i=1$

3.3 Energy consumption: It refers to the amount of energy that is spent by the network nodes within the simulation time. It is obtained by calculating each node's energy level at the end of the simulation, factoring in the initial energy of each one [10]. The following formula will produce the value for energy consumption:


$$\text{Energy Consumption} = \sum (\text{int}(i) - \text{ene}(i)) \ n \ i=1$$

IV. EXPERIMENTAL RESULTS

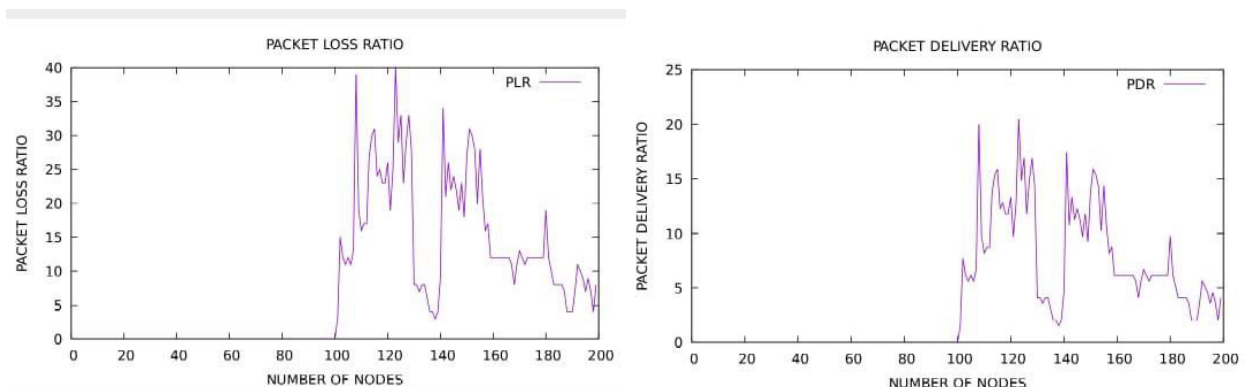

Organized by

Dhaanish Ahmed Institute of Technology, KG Chavadi, Coimbatore, India

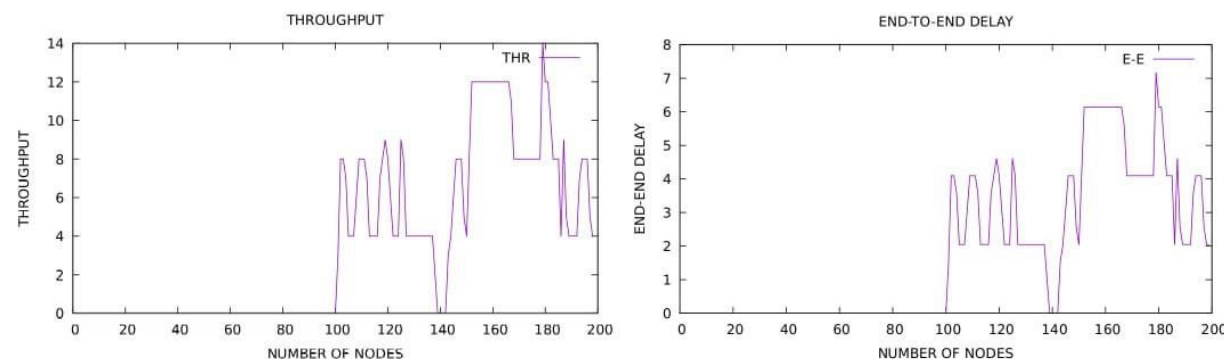

V. CONCLUSION

Our existing protocols have the limited network lifetime and energy consumption so in this paper we proposed a new energy efficient multi-path routing protocol called FF-AOMDV simulated using NS-2 based on three different scenarios, varying node speed, packet size and simulation time. These scenarios were tested by five performance metrics (packet delivery ratio, throughput, end-to-end delay, energy consumption and network lifetime). Simulation results showed that the proposed FF-AOMDV protocol has performed much better than both OLSR and AOMDV. FF-AOMDV routing protocol gives the 50% of network lifetime will be increased and also 30% of energy consumption will be decreased.

REFERENCES

- [1] Kokilamani, M., & Karthikeyan, E. (2015, March). Energy-Efficient Routing Protocols in Mobile Ad Hoc Networks: A Survey. In Proceedings of the UGC Sponsored National Conference on Advanced Networking and Applications.
- [2] Aggarwal, R. (2018, April). QoS Based Simulation Analysis of EAODV Routing Protocol for Improving Energy Consumption in Manet. In 2018 International Conference on Intelligent Circuits and Systems (ICICS) (pp. 246-250). IEEE.
- [3] Shinde, M., & Jain, S. (2017). PALBMRP: Power Aware Load Balancing Multipath Routing Protocol for MANET. International Journal of Advanced Networking and Applications, 9(1), 3329.
- [4] Smail, O., Cousin, B., Mekki, R., & Mekkakia, Z. (2014). A multipath energy-conserving routing protocol for wireless ad hoc networks lifetime improvement. EURASIP Journal on Wireless Communications and Networking, 2014(1), 139.
- [5] Nagalakshmi, S., Poonia, R., & Biradar, S. (2015). Performance Evaluation and Comparison of On-Demand Routing Protocols for Ad Hoc Networks: DSR, AODV, AOMDV, TORA. International Journal of Advanced Networking and Applications, 7(2), 2666.
- [6] Khan, K., & Goodridge, W. (2018). Link-and NodeDisjoint Evaluation of the Ad Hoc on Demand Multi-path Distance Vector (AOMDV) Routing Protocol in Wireless Sensor Networks. International Journal of Advanced Networking and Applications, 10(1), 3674-3686.
- [7] Nazhad, S. H. H., Shojafar, M., Shamshirband, S., & Conti, M. (2018). An efficient routing protocol for the QoS support of large- scale MANETs. International Journal of Communication Systems, 31(1), e3384.
- [8] Sharma, A. K., & Trivedi, M. C. (2016, February). Performance comparison of AODV, ZRP and AODVDR routing protocols in MANET. In 2016 Second International Conference on Computational Intelligence & Communication Technology (CICT) (pp. 231-236). IEEE.
- [9] Prashar, L., & Kapur, R. K. (2016, September). Performance analysis of routing protocols under different types of attacks in MANETs. In 2016 5th International Conference on Reliability, Infocom Technologies and Optimization (Trends and Future Directions)(ICRITO) (pp. 405-408). IEEE.
- [10] Satav, P. R., & Jawandhiya, P. M. (2018, August). An Energy Efficient Route Selection in MANET with AOMDV Routing Algorithm. In 2018 International Conference on Research in Intelligent and Computing in Engineering (RICE) (pp. 1-5). IEEE.



INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

 9940 572 462  6381 907 438  ijirset@gmail.com



www.ijirset.com

Scan to save the contact details