



e-ISSN: 2319-8753 | p-ISSN: 2347-6710

# IJIRSET

International Journal of Innovative Research in  
**SCIENCE | ENGINEERING | TECHNOLOGY**

# INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

Volume 12, Issue 6, June 2023

**ISSN** INTERNATIONAL  
STANDARD  
SERIAL  
NUMBER  
INDIA

Impact Factor: 8.423

9940 572 462

6381 907 438

[ijirset@gmail.com](mailto:ijirset@gmail.com)

[www.ijirset.com](http://www.ijirset.com)

# Experimental Investigations & Performance of Emission Characteristics on DI AV1 553 Diesel Engine Fuelled with Biodiesel

MADDIGUNTLA RAVITEJUDU<sup>1</sup> RAJA SEKHAR PUSULURI<sup>2</sup>

PG Scholar, Dept. of Mechanical Engineering, St. Mary's Group of Institutions Guntur, AP, India<sup>1</sup>

Assistant Professor, HOD, Dept. of Mechanical Engineering, St. Mary's Group of Institutions Guntur, AP, India<sup>2</sup>

**ABSTRACT:** In present work the mixes of biodiesel and ethanol are attempted. All things considered there are exceptionally restricted away at this, and no solid proposal is discovered with respect to mix creation. Hence forth it is chosen to attempt diverse extents and discover ideal mix. From this examination it is distinguished that 75% Bio-diesel and 25% Ethanol is ideal. Encourage the added substances which are attempted with Diesel and Ethanol mixes are additionally attempted with Biodiesel and Ethanol mixes. In this case additionally 2% THF added substance is observed to be the best added substance in terms enhancing engines productivity and diminish emanations. At long last, minor alterations on the engine like fluctuating the Pressure proportion, Injection weight and Injection timing are tried. The exploratory outcomes could yield streamlined an incentive for these motor outline parameters which are observed to be CR-18.5, IP 240bar and IT 29<sup>0</sup>TDC for this test engine. The preheating of fuel moreover attempted and 500 is giving better execution. The last outcome yielded % of change in the execution of the engine regarding Thermal efficiency/BSFC The present examination is relied upon to be valuable for what's to come advancement of a feasible IC Engine fuelled with mixes of Ethanol and biodiesel.

## I. INTRODUCTION

Energy is one of the most significant inputs for growth of all sectors including agricultural, industrial services and transport sectors. Energy has been at the centre stage of national & global economic development since several decades. The demand for energy, around the world is increasing exponentially, specifically the demand for petroleum-based energy. Petroleum derived fuels, actually, exceeds the demand of any other fuels or energy resources. The world consumption for petroleum and other liquid fuel will grow from 85million barrels/day in 2006 to 107 million barrels/day in 2030. Under these growth assumptions, approximately half of the world's total resources would be exhausted by 2030. Also, as per many studies, the world oil production would peak sometime between 2007 and 2030. Global warming is related with the greenhouse gases which are mostly emitted from the combustion of petroleum fuels. In order to control the emissions of greenhouse gases, Kyoto Protocol targets to reduce the green house gas emission by a collective average of 5% below 1990 level of respective countries. The Intergovernmental Panel on Climate Change (IPCC) concludes in the Climate Change 2007 that, because of global warming effect the global surface temperatures are likely to increase by 1.1°C to 6.4°C between 1990 and 2100 NO<sub>x</sub> emissions are over the diesel. Siva Kumar A et al. (2009) investigated the performance check on a diesel engine with neat diesel fuel and Cotton seed biodiesel mixtures. The engine experimental results showed that exhaust emissions like carbon monoxide (CO), particular matter (PM) and smoke emissions were reduced for all biodiesel mixtures. However, a small increase in Nitrogen oxides (NO<sub>x</sub>) emission was found for biodiesel mixtures.sudhakar AI(2001) has conducted investigations to search out the suitability of Rape seed oil in compression ignition engine. Investigations are conducted with 25%, 50% and 75% of Rape seed oil in an exceedingly mix of Rape seed oil and diesel. From the experimental results it's found that the mix with 25% of Rape seed oil is showing higher performance. Qiu et al. (2001) conducted the behavior of the pure diesel and nano diesel (combination of diesel and nano particles) determine that a concentration of nickel nano particles between 0.2 and 0.5 give the best anti-wear behaviour and friction reduction.V. Arul Mozhi Selvan et al. (2009) has conducted the performance and emission characteristics of compression ignition engine.

## II. EXPERIMENTAL SETUP

The experimental is conducted to find the phase separation phenomena of the bio-diesel ethanol blends. In these experimental use cerium oxide nano particles in diesel ethanol blend and pure diesel has the tendency to set down at the fuel tank. Used in the tests cerium oxide nano particle with the size of 32nm and ethanol (99.9%). After series of experiments, it's find that the blends subjected to high speed mixing followed by ultrasonic bath stabilization improves the state of being stable. The separation between ethanol and diesel. The biodiesel is produced using the Transesterification process. all the blends fluids for phase separation is taken for half an hour and murkiness procedure is used to assess the state of being stable of the resulting suspension. The experimental procedure and experimental facility is descused by Mozhi Selvan et al., (Arul Mozhi Selvan, 2009; Arul Mozhi Selvan, 2008). The engine load connected to the dynamometer. The fuel flow is measured a burette with two infra red optical sensor, air flow rate is measured to air flow sensor. The inlet and exhaust gas temperature is measured by K type thermocouples sensor the gas analyzer is used to measured the exhaust gas constituents such as Nox, CO, HC and the smoke meter is used for measure the smoke. Steady state condition recorded for all result conditions.



Fig.1: Experimental Setup (DI AV1 553 DIESEL ENGINE)

## III. RESULTS AND DISCUSSIONS

**Brake Thermal Efficiency:** Fig.2. shows the variation of Brake Thermal Efficiency with Brake Power output for Waste cooking oil and its blends with Diesel in the test engine. Brake Thermal Efficiency for 25% blend of Waste cooking oil is very close to that of Diesel. Maximum Brake Thermal Efficiency is obtained at 4 Kw load. Brake Thermal Efficiency for

25% and neat Waste cooking oil is lower by 10.41% and 34.60% respectively compared to Diesel at rated load. This is attributed to lower calorific value, high viscosity coupled with density of the fuel.

Fig.2. Break Thermal efficiency Vs Break Power

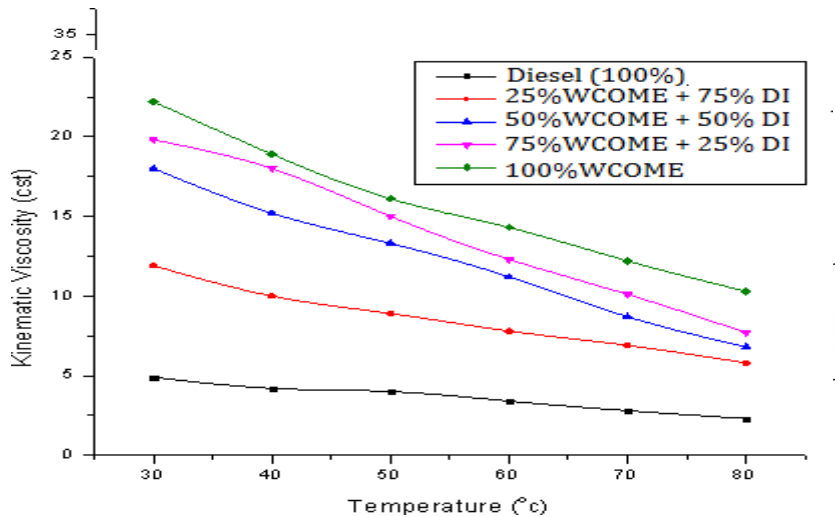


Fig.3. Viscosity Vs Temperature

**Carbon Monoxide:** Fig.4: shows the variation of Carbon Monoxide emissions with Brake Power output for Waste cooking oil and its blends with Diesel in the test engine. CO emission for 25% blend of Waste cooking oil is compared with Diesel at all loads. Neat Corn oil has the highest CO emission for all loads compared to all other blends. CO emission for Neat Corn oil at rated load is higher by 96% compared to Diesel. This is the result of incomplete combustion of the fuel.

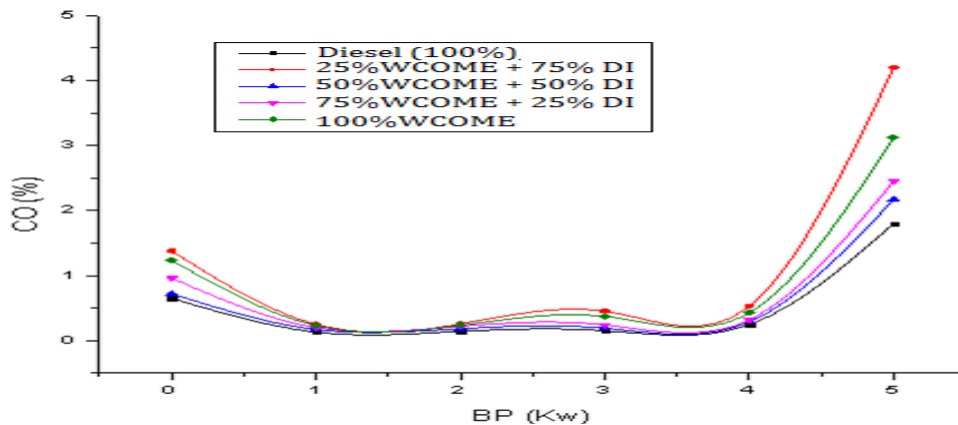


Fig.4. Carbon Monoxide Vs Break Power

**Un-Burnt Hydrocarbons:** Fig.5: shows the variation of Un-burnt hydro carbon emission with Brake Power output for Waste cooking oil and its blends with Diesel in the test engine. 25% blend of Waste cooking oil has lower UHC emission compared to all other blends for all loads. UHC emission for 25% blend and Waste cooking oil is 79 ppm and 89ppm, where as for Diesel it is 74 ppm. UHC emission for 25% blend and neat waste cooking oil at rated load is higher by 6.75% and 20.27% respectively compared to Diesel. In this phenomenon formation of rich air–fuel mixture plays a vital role.

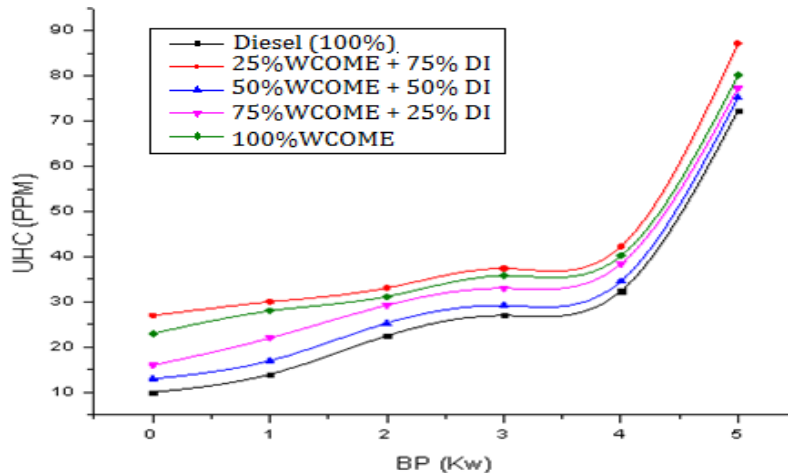


Fig.5. Un-Burnt Hydro Carbon Vs Break Power

**Nitrogen oxides:** Fig.6: shows the variation of Nitrogen Oxide emission with Brake Power output for Waste cooking oil and its blends with Diesel in the test engine. Diesel has higher NOx emission compared to all other blends. NOx emission for 25 % blend of Waste cooking oil is well compared with Diesel at all loads. NOx emission for 25% blend of Waste cooking oil at rated load is 55 ppm, where as for Diesel it is 58 ppm. The difference is 3 ppm. i.e. waste cooking oil NOx emission is lower by 5.45% compared to Diesel. Lower peak combustion temperature in the combustion chamber influences this factor.

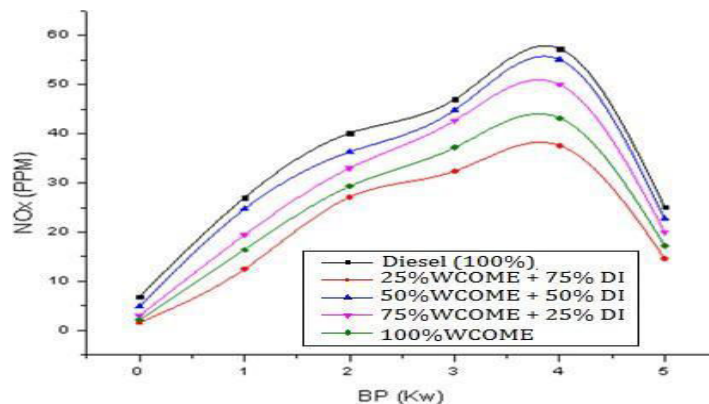


Fig.6. Nitrogen Oxide Vs Break Power

**Smoke:** Fig.7: shows the variation of Smoke emission with Brake Power output for Waste cooking oil and its blends with Diesel in the test engine. 25% blend of Waste cooking oil has lower Smoke emission compared to all other blends and slightly higher than Diesel. Waste cooking oil has the highest smoke opacity compared to all other blends for all loads. Smoke emission for 25% blend is compared to Diesel. Smoke emission for 25% blend and Waste cooking oil at rated load is higher by 8.43% and 31.32% respectively compared to Diesel. The effect of incomplete combustion leads to this result.

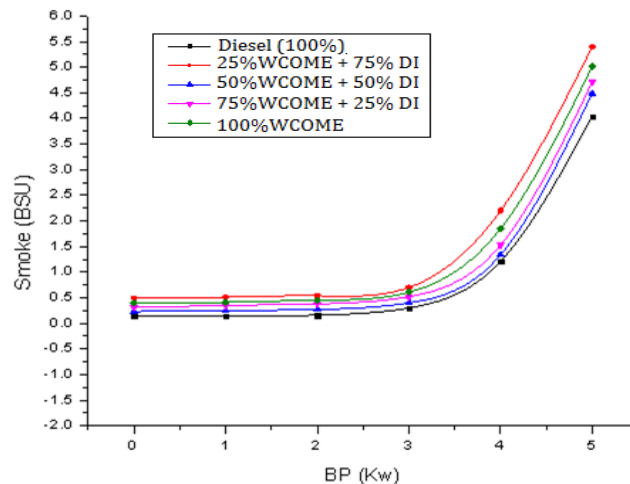


Fig.5. Smoke Vs Break Power

#### IV.CONCLUSION

- ☞ Brake Thermal Efficiency for Neat Pongamia, Palm, Waste cooking oil, Sunflower oil and Karanja oil is lower by 25.21%, 27.06%, 34.60%, 22.55% and 27.56% respectively compared to Diesel”. This is due to lower calorific value and high viscosity of the oils.
- ☞ Neat Pongamia, Palm, Waste cooking oil, Karanja and sunflower oil BSFC is higher by 45.23%, 40.47%, 54.76%, 40.47% and 47.61% respectively compared to Diesel at rated load. This is result of high viscosity of the fuels.
- ☞ EGT for Neat Pongamia, Palm, Waste cooking oil , karanja and Sunflower oil is higher compared to Diesel.
- ☞ Brake Thermal Efficiency for Neat Pongamia, Palm, Waste cooking oil, Sunflower oil and Karanja oil is lower by 25.21%, 27.06%, 34.60%, 22.55% and 27.56% respectively compared to Diesel”. This is due to lower calorific value and high viscosity of the oils.
- ☞ The brake thermal efficiency of the diesel biodiesel ethanol blends is low than pure diesel.

#### REFERENCES

- 1). Barsic. N.J and Humke A.L., (1981). “Prospects of Bio Diesel production from vegetable oils in India”, International Journal of Renewable and Sustainable Energy Reviews, Vol.9, pp. 339-351.
- 2). Bruwer. J.J, B.D.Boshoff, F.J.C Hugo, L.M.Du Plessis, J.Fuls, C.Hawkins, A.N. Vander Walt and A.Engelbert, (1981). “The utilization of sunflower seed oil as renewable fuel Diesel engines, ASAE Journal, Vol. 2, pp. 74-81”.
- 3). Bacon D. M., Brear. F., Moncrieff, I. D and Walker, K.L., (1981). “The use of vegetable oils in straight and modified form as Diesel engine fuels”, beyond the Energy crisis - Opportunity and Challenge Vol.III, Third International Conference on Energy use Management, Berlin (West),pp. 1525-33.
- 4). Yarbrough C.M., Lepori W.A. and Engler, C.R. (1981). Compression ignition performance of using sunflower seed oil”, ASAE Paper No. 81-3576.
- 5). Pryor R.W., Hanna M.A., Schinstock and Bashford L.L., (1983). Soybean oil fuel in a small Diesel engine, Transactions of the ASAE, Vol.26, No.2, pp. 333-337.
- 6). R.V.S.Madhuri, P.V.Rao, K.R.M.Alekhyia and A.Swarna Kumarimar (2015) Properties of vegetable oil and their influence on performance and exhaust emission of a di- Diesel engine, International Journal of Mechanical Engineering and Technology, Vol.6, pp. 89-101.
- 7). T.M. Yunuskhani, A.E. Atabani, I.A. Badruddin, A. Badarudin, M.S. Khayoon, S. Triwahyono, (2014) Recent scenario and technologies to utilize non-edible oils for Bio Diesel production, Renewable and Sustainable Energy Reviews , Vol.37, pp. 840–851.

- 8). Tuccar, E. Tosun, T. Ozgur, K. Aydın. (2014) Diesel engine emissions and performance from blends of citrus sinensis Bio Diesel and Diesel fuel, Fuel, Vol.132, pp. 7–11.
- 9). G. Dwivedi, M.P. Sharma, Potential. (2014) Limitation of straight vegetable oils as engine fuel – An Indian perspective, Renewable and Sustainable Energy Reviews , Vol.33, pp.316–322.
- 10). Blin, J., C. Brunschwig, A. Chapuis, O. Changotade, S.S. Sidible, E.S. Noumi, P. Girard. (2013) Characteristics of vegetable oils for use as fuel in stationary Diesel engines-Towards specifications for a standard in West Africa,” Renewable and Sustainable Energy Reviews, Vol.22, pp. 580-597”.
- 11). Ayhan Demirbas. “Recent developments in Bio Diesel fuels”. International journal of green energy. Vol. 4, 2007. PP. 15-26”.
- 12). Reyes J.F, Sepulveda M.A. “Emissions and power of a Diesel engine fuelled with crude and refined Bio Diesel from salmon oil”. Fuel. Vol. 85, 2006. PP. 1714-1717”.
- 13). Seppo A. Niemi, Petri E. Illikainen, Mika L.K. Makinen and Vaino O.K. Laiho (1997), “Performance and exhaust emissions of a tractor engine using mustard seed oil as fuel”. SAE paper No.9790219, pp.21-32”.
- 14). Yu.C.W, Bari.S, and Ameen.A, (2002). “A comparison of combustion characteristics of waste cooking oil with Diesel as fuel in a direct injection Diesel engine” Proc. Institution Mechanical Engineers”. Volume 216 Part D: J Automobile Engineering, pp. 237-242”.
- 15). Pugazhvidivu.M. and Jeyachandran.K, (2003). “Investigation on the performance and exhaust emissions of a Diesel engine using waste frying oil as Fuel”, Renewable Energy, Vol.30, pp. 2189-2202”.
- 16). Lakshminarayanan.G, Saravanan.S, Sampath.S, Rajagopal.K, (2008). “Combustion and Emission characteristics Diesel engine fuelled with rich bran oil methyl ester and its Diesel blends”. Thermal science: Vol.12, No.1, pp. 139-150.
- 17). Nazar J, Ramesh A. and Nagalingam B., (2004), “Performance and emission characteristics of a Diesel engine using coconut oil and its methyl ester”, ISTE National Conference on alternate fuels for automobiles, IRTT, Erode, pp. 24-31.
- 18). Wang WG, Lyons DW, Clark NN, Gautham M and Nortan PM (2006). “Emissions from heavy duty trucks fuelled by Diesel and Bio Diesel blend without engine modification”. Envi. Sci. & Tech., Vol.34, pp. 933-939.
- 19). Narayana Reddy. J. and Ramesh.A, (2006). “Parametric studies for improving the performance of a Jatropha oil-fuelled compression ignition engine”, Renewable Energy, Vol.31, pp. 1994-2016.
- 20). Deshmukh.S.J., Bhuyar.L.B., (2009). “Transesterified Hingan (Balanites) oil as a fuel for compression ignition engine”, Biomass and Bioenergy, Vol.33, pp. 108-112.



**INNO SPACE**  
SJIF Scientific Journal Impact Factor  
**Impact Factor: 8.423**



**ISSN** INTERNATIONAL  
STANDARD  
SERIAL  
NUMBER  
INDIA



# INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

9940 572 462 6381 907 438 [ijirset@gmail.com](mailto:ijirset@gmail.com)



[www.ijirset.com](http://www.ijirset.com)

Scan to save the contact details