

e-ISSN: 2319-8753 | p-ISSN: 2347-6710

DIA

International Journal of Innovative Research in SCIENCE | ENGINEERING | TECHNOLOGY

# INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

Volume 13, Issue 4, April 2024

INTERNATIONAL STANDARD SERIAL NUMBER INDIA

### Impact Factor: 8.423

9940 572 462

S 6381 907 438

🖂 ijirset@gmail.com

<mark>Å ⋽ </mark>₩ IJIRSET

| e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Referred Journal |

Volume 13, Issue 4, April 2024

| DOI:10.15680/IJIRSET.2024.1304238 |

## **Road Accident Prediction and Alert System**

Gadhave Sonali Tanaji, Prof. Dhongade V.S.

Department of Computer Engineering, Vishwabharati Academy's College of Engineering, Sarola Baddi,

Ahmednagar, India

**ABSTRACT:** Every day around the world, a large percentage of people die from traffic accident injuries. An effective approach for reducing traffic fatalities is: first building automatic traffic accident detection system, second, reducing the time between when an accident occurs and when first emergency responders are dispatched to the scene of the accident. Recent approaches are using built-in vehicle automatic accident detection and notification system. While these approaches work fine but they are expensive, maintenance complex task, and are not available in all cars. On the other hand, the ability to detect traffic accidents has only recently become possible because of the advances in the processing power. Most of the web application based accident detection systems rely on the high speed of the vehicle to detect an accident. We proposed the system which consists of two phases; the detection phase which is used to detect accident. The notification phase which is used to send information.

KEYWORDS: Accident Prediction, Machine Learning, Traffic, Notification, Prediction, Alert System

#### I. INTRODUCTION

Traffic accidents are a major public issue worldwide. Road collisions are the second leading cause of death. The main reason for the death of a person during an accident is the lack of availability of the resources. Thus, in the case of incidents involving vehicular accidents, response time is crucial for the timely delivery of emergency medical services to accident victims and is expected to have an impact on fatalities. Moreover, each minute is passed while an injured crash victims do not receive emergency medical care can make a large difference in their survival rate, for example, Analysis shows that if we decrease just 1-minute in accident response time that can increase chances of saving an individual's life up to six percent.

The purpose of this proposed system is to design and implement such an automated system that uses system to detect vehicle accidents and report it to the nearest available responders to help counter these emerging problems and reduce casualties as much as possible. The detection system would help reduce fatalities due to vehicle accidents by decreasing the response time of emergency services.

In this work we are utilizing web application to detect accidents and report it to the nearest available emergency responders i.e. Hospital and Police Station with the exact location of victims in emergency. On an emergency responder side, they will accept the location and medical data from the incident that occur near to them and rescue them as soon as possible. Accident detection and rescue operation is time critical operation. Real time action is required. System should be able to detect and react to the situations in real time. Real time response should be considered while designing the architecture. Traffic density now a day is huge. Accident detection and rescue system is essential for every vehicle.

#### **II. LITERATURE SURVEY**

Literature survey is the most important step in any kind of research. Before start developing we need to study the previous papers of our domain which we are working and on the basis of study we can predict or generate the drawback and start working with the reference of previous papers.

In this section, we briefly review the related work on accident detection system and their different techniques.

In the article [1], they implemented a device of this type that not only detects any accidents that occur in the car, but immediately informs the corresponding authorities as soon as the accident occurs. We have connected 8 digital sensors to  $\mu$ c positioned in various positions of the vehicle. As soon as an incident is detected, a  $\mu$ c pulse is applied. The  $\mu$ c then activates a buzzer and sends an emergency SMS (using the AT commands) to the interested persons [1].



e-ISSN: 2319-8753, p-ISSN: 2347-6710 www.ijirset.com | Impact Factor: 8.423 | A Monthly Peer Reviewed & Referred Journal |

#### Volume 13, Issue 4, April 2024

#### | DOI:10.15680/IJIRSET.2024.1304238 |

In the article [2], Automatic detection of Intelligent Accidents (ASAD) is a self-detection unit system that immediately notifies you Emergency contact via a text message when a moment changes in acceleration, rotation and impact force at one end of the vehicle is detected by the system, specifying the position and the moment of the accident. The idea is that as soon as an accident is detected by the system, authorities should be immediately notified to avoid further car congestion and to allow passengers who will be escorted to the hospital in a timely manner. The system involves the use of fuzzy logic as a decision support integrated into the smartphone application that analyses the data coming from the sensors and makes a decision based on a set of rules. The simulated results show an accuracy of 98.67% of the system with failures resulting from the "gray regions" of the variable values.

In the article [3], presents HDyCopilot, an Android application for integrated incident detection with multimodal alarm dissemination, both through eCall and IEEE 802.11p. The proposed the incident detection algorithm receives the vehicle entries, through ODB-II and smart phone sensors, or the Accelerometer, magnetometer and gyroscope. The Android the smartphone is also used as a human-machine interface, therefore the driver can configure the application, receive the danger on the road warnings issued by other vehicles nearby and cancel Countdown procedures for detecting false incidents. A prototype the implementation was validated through laboratory tests

In the article [4], the results prove it Algorithm improves the estimate of the risk of an accident compared to the estimated risk based only on the historical records of accidents. It was found that the algorithm is more efficient, especially in the case of analysis of fatal and pedestrian accidents. Impact on industry: the result of the proposal the algorithm can help authorities effectively identify areas with a high risk of accidents. Furthermore, you can to serve as a reference for urban planners who consider road safety.

In the article [5], they present a new method for automatic traffic incident detection, based on the hydrodynamics of the softened particles (SPH). In our method, we obtain a movement flow field of video through the dense optical flow extraction. So a thermal diffusion process (TDP) is exploited to activate the movement flow field in a coherent motion field. Approximation particles moving towards individuals, their forces of interaction, represented as endothermic reactions, are calculated using the measurement of enthalpy, thus obtaining potential particles of interest. Furthermore, we use SPH that accumulates contribution of each particle in a weighted form based on a function of the kernel Experimental evaluation is performed in a series of video sequences compiled by YouTube and the results obtained are compared with a state of the art technique.

#### **III. PROPOSED SYSTEM**

The huge number of injuries and death as a result of road accident uncovers the story of global crisis of road safety. The most obvious reason for a person's death during accidents is unavailability of the first aid provision, which is due to the delay in the information of the accident being reached to the ambulance or to the hospital. Our proposed system "Accident Detection System For Emergency Assistance" helps to overcome this problem which consist of two phases detection phase to detect the accident and notification phase to inform the emergency centre i.e. nearest hospital or police station to get help within a less amount of time.

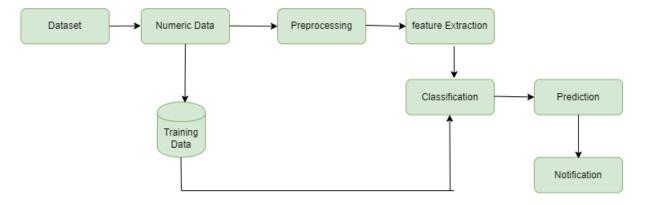


Figure 1. System Architecture



| e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Referred Journal |

#### || Volume 13, Issue 4, April 2024 ||


| DOI:10.15680/IJIRSET.2024.1304238 |

This section logically illustrates the mechanism of the proposed system structure together with each module that constructs the overall system architecture. The proposed system, called Intelligent Accident Detection, consists of two phases; the detection phase, is used to identify the occurrence of an accident and notification phase, is used to inform nearest Hospital and Police station for emergency help. Every web application based accident detection and notification system is exposed to false positives. In the proposed system, helpful supporting features were added to the system to increase the accuracy of detection process and reduce the probability of false positives. Proposed system presents a confirmation screen which gives the user the opportunity to confirm the accident, thus in case of false positive occurs the user can cancel the alarm and notification is aborted. If he is not able to cancel then the accident is detected.

#### Algorithm

#### **Random Forest**

- The algorithm used here is Random Forest. Random Forest is the most popular and powerful algorithm of machine learning.
- Step 1: Assume N as number of training samples and M as number of variables within the classifier.
- Step 2: The number m as input variables to decide the decision at each node of the tree; m should be much less than M.
- Step 3: Consider training set by picking n times with replacement from all N available training samples. Use the remaining of the cases to estimate the error of the tree, by forecasting their classes.
- Step 4: Randomly select m variables for each node on which to base the choice at that node. Evaluate the best split based on these m variables in the training set.
- Step 5: Each tree is fully grown and not pruned (as may be done in constructing a normal tree classifier). For forecasting, a new sample is pushed down the tree. It is assigned the label of the training sample in the terminal node it ends up in. This procedure is repeated over all trees in the ensemble, and the average vote of all trees is reported as random forest prediction. i.e. classifier having most votes.

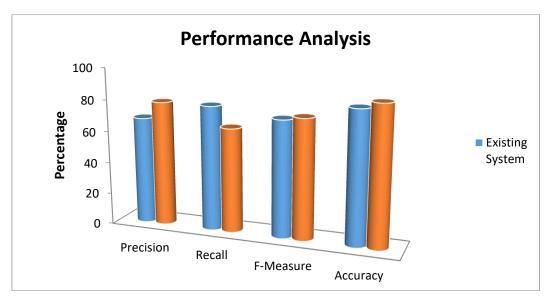

#### **IV. RESULTS AND DISCUSSION**

	Existing System	Proposed System
Precision	67.78	78.70
Recall	79844	65.64
F-Measure	73.11	74.31
Accuracy	83.29	87.26



| e-ISSN: 2319-8753, p-ISSN: 2347-6710| www.ijirset.com | Impact Factor: 8.423| A Monthly Peer Reviewed & Referred Journal |

#### Volume 13, Issue 4, April 2024

DOI:10.15680/IJIRSET.2024.1304238

#### V. CONCLUSION

The System design methodology is proposed automatic system for detecting and Notify Accidents. Volume, speed, Big Data Aspects of Variety and Veracity are taken into consideration when designing architecture. An architecture and design methodology is proposed for intelligent accident detection and notification System for Emergency Assistance. Cost effective web application based accident detection system reduce the time between when an accident occurs and when first emergency responders are dispatched to the scene of the accident which help a lot in accident situations to save human life. Every web application based accident detection and notification system is exposed to false positives. In the proposed system, helpful supporting features were added to the system to increase the accuracy of detection process and reduce the probability of false positives. Proposed system presents a confirmation screen which gives the user the opportunity to confirm the accident, thus in case of false positive occurs the user can cancel the alarm and notification is aborted. It allows for uninjured peoples or bystanders to take image, location and send them to emergency responders, for reporting the accident.

#### REFERENCES

[1] Jules White, Chris Thompson, Hamilton Turner, Brian Dougherty, and Douglas C. Schmidt, "WreckWatch: automatic traffic accident detection and notification with smartphones," Mobile Networks and Applications, Mar 2011. DOI: 10.1007/s11036-011-0304-8.

[2] Asad Ali and Mohamad Eid, "An automated system for accident detection," in2015 IEEE International Instrumentation and Measurement TechnologyConference (I2MTC) Proceedings, May 2015.

[3] Bruno Fernandes, Vitor Gomes, and Joaquim Ferreira, "Mobile application forautomatic accident detection and multimodal alert," Traffic Accident Detectionthrough a Hydrodynamic Lens 2015 IEEE 81st Vehicular Technology Conference(VTC Spring), May 2015.

[4] Kwok-suen Ng, Wing-tat Hung, and Wing-gun Wong, "An algorithm forassessing the risk of traffic accident," Journal of Safety Research, vol. 33, no. 3, Oct. 2002.

[5] Habib Ullah, Mohib Ullah, Hina Afridi, Nicola Conci, and Francesco G. B. DeNatale, "Traffic accident detection through a hydrodynamic lense," in IEEEInternational Conference on Image Processing (ICIP), Sep. 2015.

[6] Supriya Vidhate, Mamta Tadavi, Manisha Jagtap, and Rajratan Janrao, "Accidentidentification system with sms notification," International Journal of Informative and Futuristic Research, vol. 2, no. 2, Oct. 2014.

INTERNATIONAL Standard Serial Number India







## INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY





www.ijirset.com