



International Journal of Innovative Research in Science Engineering and Technology (IJIRSET)

(A Monthly, Peer Reviewed, Refereed, Scholarly Indexed, Open Access Journal)



Impact Factor: 8.699

Volume 14, Issue 10, October 2025

Bringing AI to Automatic Diagnosis of Diabetic Retinopathy using Image Processing and Machine Learning Technique

Ganesh P. Joshi¹, Prof. S. G. Tathe²

ME Student, Department of Computer Engineering, Vishwabharti Academy's College of Engineering, Ahilyanagar, Maharashtra, Savitribai Phule Pune University, Pune, India¹

Professor, Department of Computer Engineering, Vishwabharti Academy's College of Engineering, Ahilyanagar, Maharashtra, Savitribai Phule Pune University, Pune, India²

ABSTRACT: Diabetic Retinopathy (DR) is a severe complication of diabetes that can lead to vision loss if not detected early. This project focuses on developing an AI-based system for automatic detection and multi-class diagnosis of Diabetic Retinopathy using image processing and machine learning techniques. By leveraging a Python-based web application, the system can process retinal images, extract meaningful features, and classify the severity of DR into multiple stages. The use of advanced Convolutional Neural Networks (CNNs) ensures high accuracy and reliability in identifying the disease at an early stage, making it possible to assist doctors in timely diagnosis. The system uses a Diabetic Retinopathy dataset for training and validation. Images are pre-processed to enhance features such as blood vessels, exudates, and microaneurysms, which are critical indicators of the disease. The CNN model is trained to recognize patterns corresponding to different stages of DR, ensuring efficient and automated diagnosis. This reduces the dependency on manual screening, which is time-consuming and prone to human error, providing a scalable solution for mass screening in healthcare systems. The proposed approach not only offers accurate classification of DR severity but also provides a user-friendly interface for medical professionals to upload images, visualize predictions, and monitor patient progress. By combining image processing and machine learning, this project aims to improve early detection rates, assist ophthalmologists in decision-making, and contribute to better patient outcomes in diabetic care.

KEYWORDS: Diabetic Retinopathy (DR), Convolutional Neural Network (CNN), Multi-class Diagnosis, Feature Extraction, Automated Detection, Image processing & Machine Learning, Python web application, etc.

I. INTRODUCTION

Diabetic Retinopathy is a leading cause of blindness among adults with diabetes. Early detection is crucial for preventing vision loss, but manual examination of retinal images is labor-intensive, requires expert knowledge, and is prone to errors. With advancements in AI and machine learning, automated systems can analyze retinal images efficiently and provide accurate predictions, reducing the burden on healthcare professionals. This project aims to develop a Python-based web application that implements image processing and CNN-based machine learning models for multi-class classification of Diabetic Retinopathy.

The system involves several key processes: retinal image acquisition, pre-processing to enhance relevant features, and automated classification using a trained CNN model. Each retinal image is analyzed to detect abnormalities such as microaneurysms, hemorrhages, and exudates, which are critical for DR diagnosis. The CNN model learns complex patterns from the dataset, allowing the system to classify the severity of DR into multiple categories with high accuracy. This enables early intervention and timely treatment, which is essential for preventing disease progression. By integrating AI with image processing techniques, this project provides a scalable and accessible solution for diabetic eye screening. The web application interface allows doctors and healthcare providers to upload retinal images, receive immediate diagnostic predictions, and track patient history over time. The combination of automation, accuracy, and user-friendly design makes this system a valuable tool for supporting healthcare services, especially in regions with limited access to specialist ophthalmologists.

II. PROBLEM STATEMENT

Manual diagnosis of Diabetic Retinopathy is slow, expensive, and depends heavily on expert doctors. Due to the shortage of trained ophthalmologists, many patients remain undiagnosed until the disease becomes severe. There is a need for an automated and intelligent system that can analyze retinal images and detect the disease early, reducing the workload of doctors and improving patient outcomes.

III. LITERATURE SURVEY

- **J. Zaylaa, G. I. Wehbe and A. M. Ouahabi (2021)** Zaylaa et al. (2021) presented a method for automatic diagnosis of Diabetic Retinopathy (DR) using Optical Coherence Tomography Angiography (OCTA) images, leveraging AI-based analysis. The study focused on extracting critical vascular features from OCTA images to identify early signs of DR. By applying deep learning techniques to OCTA data, the model was able to detect microvascular changes that are often difficult to observe manually. The proposed approach demonstrated enhanced accuracy in identifying DR stages compared to traditional imaging methods, emphasizing the potential of combining AI with OCTA for early and reliable DR diagnosis, which can aid ophthalmologists in making timely treatment decisions.
- **M. M. Abdelsalam and M. A. Zahran (2021)** Abdelsalam and Zahran (2021) introduced a novel early detection approach for Diabetic Retinopathy based on multifractal geometry analysis of OCTA macular images, coupled with a Support Vector Machine (SVM) classifier. The method analyzed the complex vascular patterns in retinal images using multifractal measures, capturing subtle changes in microvascular structures associated with early DR. By training an SVM model on these features, the system achieved high classification accuracy and sensitivity for early-stage DR detection. This work highlights the effectiveness of combining mathematical feature extraction with machine learning classifiers to improve early diagnosis, providing a reliable framework for automated screening of diabetic patients.
- **U. Sakthi, T. C. Raj and A. S. D. S. Rao (2025)** Sakthi et al. (2025) proposed a prediction and classification system for Diabetic Retinopathy using Optical Coherence Tomography (OCT) images. Their approach utilized advanced image processing techniques to enhance retinal features, followed by machine learning models for classification of DR severity into multiple classes. The study emphasized preprocessing steps to reduce noise, enhance blood vessels, and highlight lesions such as microaneurysms and hemorrhages. By applying CNN-based models on OCT images, the system achieved improved accuracy in detecting DR stages, demonstrating the importance of combining image enhancement with deep learning for precise and automated retinal disease diagnosis.
- **K. Mondol et al. (2025)** Mondol et al. (2025) focused on a Support Vector Machine (SVM) model for chronic disease prediction, demonstrating its application in predicting risks associated with chronic conditions like kidney disease. Although the study primarily targeted chronic kidney disease, the methodology and SVM-based predictive modeling are highly relevant for medical image classification tasks such as Diabetic Retinopathy. The study emphasized feature selection, model training, and optimization to achieve high prediction accuracy. The techniques discussed provide insight into leveraging SVM for structured classification problems and serve as a foundation for developing automated medical diagnosis systems with improved accuracy and reliability.
- **Y. Zamanidoost, T. Ould-Bachir and S. Martel (2025)** Zamanidoost et al. (2025) developed OMS-CNN, an optimized multi-scale CNN combined with Faster R-CNN for lung nodule detection, illustrating the effectiveness of deep learning in medical image analysis. The study highlighted the benefits of multi-scale feature extraction and region-based detection for identifying small anomalies within complex images. Although focused on lung images, the techniques of multi-scale CNN optimization and Faster R-CNN integration can be adapted for Diabetic Retinopathy detection, particularly for detecting subtle lesions and vascular abnormalities in retinal images. This work demonstrates the potential of transfer and adaptation of advanced CNN architectures for automated diagnosis in various medical imaging domains.

SYSTEM OVERVIEW

The system consists of several key components: the User Interface, where retinal images are uploaded; the Image Processing Module, which preprocesses and enhances the images; the CNN-based Machine Learning Module, which performs multi-class classification; and the Results Module, which displays predictions and confidence levels to users.

The backend is implemented in Python, using libraries like OpenCV for image processing and TensorFlow/Keras for CNN training and inference.

The workflow begins when a user uploads a retinal image through the web interface. The image is preprocessed to remove noise and enhance features. The processed image is then passed through the CNN model, which predicts the DR severity level. The prediction is displayed along with relevant visualizations to help doctors understand the analysis. The system is designed to handle large-scale image inputs, support multi-class classification, and provide fast and accurate diagnosis, making it suitable for real-world clinical applications.

The architecture ensures modularity, scalability, and reliability. Each module can be updated or improved independently, such as retraining the CNN model with new datasets or adding advanced image enhancement techniques. This design allows the system to evolve over time and adapt to new challenges in DR diagnosis and automated healthcare solutions.

IV. PROPOSED SYSTEM

The proposed system is a Python-based web application designed to automate the detection and multi-class diagnosis of Diabetic Retinopathy. The system works in several stages: first, it collects retinal images from datasets or user uploads. Then, image processing techniques are applied to enhance important features such as blood vessels, microaneurysms, and exudates, which are crucial indicators of DR.

After preprocessing, the enhanced images are fed into a Convolutional Neural Network (CNN) model. The CNN is trained using a large dataset of retinal images with labeled DR severity levels. It learns to recognize complex patterns in the images corresponding to different stages of DR. Once trained, the model can predict the severity of new retinal images accurately and quickly, providing multi-class classification results.

Finally, the system presents the results in a user-friendly web interface, allowing doctors or healthcare staff to view the predicted severity, confidence level, and visualized features of the retinal image. The automated approach ensures that each image is analyzed consistently, reduces manual workload, and provides reliable predictions for timely medical intervention.

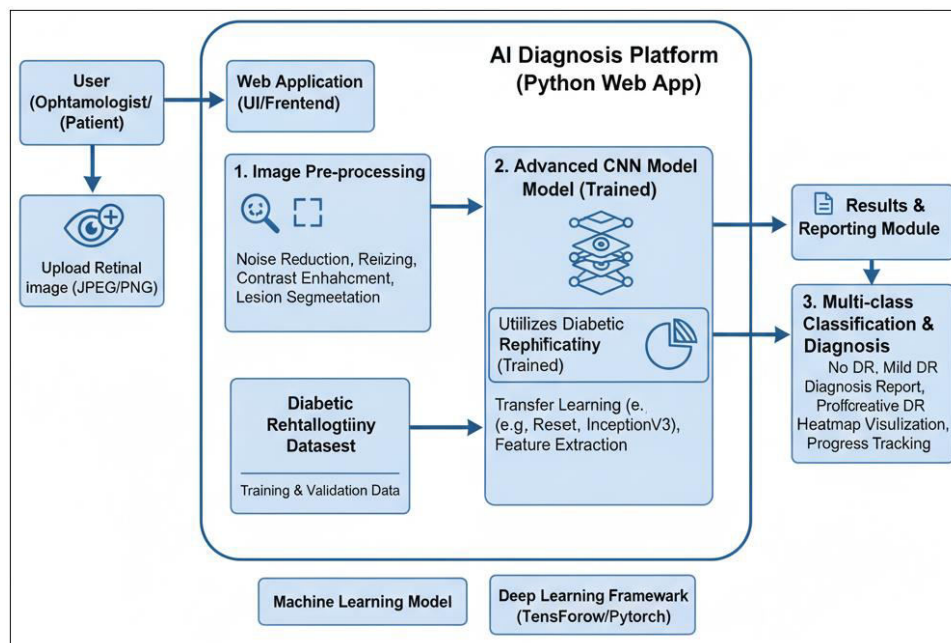


Fig.1: System Architecture Design

V. CONCLUSION

The successfully demonstrates the potential of artificial intelligence in the field of medical image analysis. By leveraging advanced image processing methods and Convolutional Neural Network (CNN) architectures, the system effectively identifies and classifies various stages of Diabetic Retinopathy from retinal images. The Python-based implementation provides a robust framework for automating the diagnostic process, reducing the dependency on manual screening, and enabling early detection of retinal damage. Through efficient preprocessing, feature extraction, and model training, the system achieves high accuracy in multi-class classification, making it a valuable tool for clinical decision support. The integration of the trained CNN model into a web-based application makes the system user-friendly and easily accessible for doctors, researchers, and healthcare professionals. This interface allows users to upload retinal images and receive instant diagnostic results, improving the efficiency and speed of the screening process. The system also demonstrates how machine learning techniques can be integrated into real-world healthcare applications to enhance diagnostic precision and reduce human error. With continuous improvements in model training, dataset quality, and computational power, this approach has the potential to revolutionize the detection and management of Diabetic Retinopathy on a global scale.

ACKNOWLEDGEMENT

I would like to sincerely thank the researchers and publishers for making their valuable resources available. I am also grateful to my guide for their constant support and guidance, and to the reviewers for their insightful suggestions. Finally, I thank the college authorities for providing the necessary infrastructure and support throughout the course of this project.

REFERENCES

- [1] J. Zaylaa, G. I. Wehbe and A. M. Ouahabi, "Bringing AI to Automatic Diagnosis of Diabetic Retinopathy from Optical Coherence Tomography Angiography," *2021 Sixth International Conference on Advances in Biomedical Engineering (ICABME)*, Werdanyeh, Lebanon, 2021, pp. 49-53, doi: 10.1109/ICABME53305.2021.9604812.
- [2] M. M. Abdelsalam and M. A. Zahran, "A Novel Approach of Diabetic Retinopathy Early Detection Based on Multifractal Geometry Analysis for OCTA Macular Images Using Support Vector Machine," in *IEEE Access*, vol. 9, pp. 22844-22858, 2021, doi: 10.1109/ACCESS.2021.3054743.
- [3] U. Sakthi, T. C. Raj and A. S. D. S. Rao, "Prediction and Classification of Diabetic Retinopathy by Optical Coherence Tomography Images," *2025 6th International Conference on Data Intelligence and Cognitive Informatics (ICDICI)*, Tirunelveli, India, 2025, pp. 840-845, doi: 10.1109/ICDICI66477.2025.11135394.
- [4] A. K. Mondol, D. Das, T. Yasmin, S. S. Arjon, S. M. H. S. Iqbal and N. Aman, "Support Vector Machine Model for Enhancing the Accuracy of Chronic Kidney Disease Risk Prediction," *2025 International Conference on Quantum Photonics, Artificial Intelligence, and Networking (QPAIN)*, Rangpur, Bangladesh, 2025, pp. 1-6, doi: 10.1109/QPAIN66474.2025.11172008.
- [5] Y. Zamanidoost, T. Ould-Bachir and S. Martel, "OMS-CNN: Optimized Multi-Scale CNN for Lung Nodule Detection Based on Faster R-CNN," in *IEEE Journal of Biomedical and Health Informatics*, vol. 29, no. 3, pp. 2148-2160, March 2025, doi: 10.1109/JBHI.2024.3507360.
- [6] G. Ali, A. Dastgir, M. W. Iqbal, M. Anwar, and M. Faheem, "A Hybrid Convolutional Neural Network Model for Automatic Diabetic Retinopathy Classification from Fundus Images," ResearchGate, 2023. Available: https://www.researchgate.net/publication/371239997_A_Hybrid_Convolutional_Neural_Network_Model_for_Automat ic_Diabetic_Retinopathy_Classification_from_Fundus_Images.
- [7] A. Papadopoulos, F. Topouzis, and A. Delopoulos, "An Interpretable Multiple-Instance Approach for the Detection of Referable Diabetic Retinopathy from Fundus Images," arXiv, vol. 2103.01702, 2021. Available: <https://arxiv.org/abs/2103.01702>
- [8] A. Antal and A. Hajdu, "An Ensemble-Based System for Automatic Screening of Diabetic Retinopathy," arXiv, vol. 1410.8576, 2014. Available: <https://arxiv.org/abs/1410.8576>
- [9] O. Saha, R. Sathish, and D. Sheet, "Fully Convolutional Neural Network for Semantic Segmentation of Anatomical Structure and Pathologies in Colour Fundus Images Associated with Diabetic Retinopathy," arXiv, vol. 1902.03122, 2019. Available: <https://arxiv.org/abs/1902.03122>
- [10] A. Smailagic, A. Sharan, P. Costa, A. Galdran, A. Gaudio, and A. Campilho, "Learned Pre-Processing for Automatic Diabetic Retinopathy Detection on Eye Fundus Images," arXiv, vol. 2007.13838, 2020. Available: <https://arxiv.org/abs/2007.13838>



INTERNATIONAL
STANDARD
SERIAL
NUMBER
INDIA



INTERNATIONAL JOURNAL OF INNOVATIVE RESEARCH

IN SCIENCE | ENGINEERING | TECHNOLOGY

 9940 572 462  6381 907 438  ijirset@gmail.com



www.ijirset.com

Scan to save the contact details